



- Compact one- two-channel Ex i output isolating repeater
- Variants with a wire breakage and short-circuit monitoring system, which can be disconnected and includes message contact
- For use up to SIL 2 (IEC/EN 61508)

A3

MY R. STAHL 9165A



The Series 9165 Ex i isolating repeaters are used for the intrinsically safe operation of control valves, I/P converters and indicators. They transmit superimposed HART communication signals in both directions. The input, output and auxiliary power are galvanically separated from one another. The two channels in the two-channel variants are galvanically separated from one another.

	IECEX / ATEX					
Zone	0	1	2	20	21	22
Ex interface	•	•	•	•	•	•
Installation in			•			

	NEC® 500 CE Code Appendix J					
	Class I		Class II		Class III	
Division	1	2	1	2	1	2
Ex interface	•	•	•	•	•	•
Installation in		•				

	CE Code Section 18					
	NEC® 505			NEC® 506		
Zone	Class I			20	21	22
Ex interface	0	1	2			
Ex interface	•	•	•			
Installation in			•			


Selection Table						
Number of channels		1				
Input signal	Output signal	LFD relay	Connection type	Product Type	Art. No.	Weight
0/4 to 20 mA with HART	0/4 to 20 mA with HART	Yes	Screw terminal	9165/16-11-11s	201270	180 g
		Yes	Spring clamp terminal	9165/16-11-11k	201271	180 g
4 to 20 mA with HART	4 to 20 mA with HART	No	Screw terminal	9165/16-11-10s	207909	180 g
Number of channels		2				
Input signal	Output signal	LFD relay	Connection type	Product Type	Art. No.	Weight
0/4 to 20 mA with HART	0/4 to 20 mA with HART	Yes	Screw terminal	9165/26-11-11s	201272	190 g
		Yes	Spring clamp terminal	9165/26-11-11k	201273	190 g

LFD – line fault diagnostics
 Yes – device transmits field-side line faults via a 4 to 20 mA signal by means of LED and relay contact.


Technical Data	
Explosion Protection	
IECEX gas explosion protection	Ex nA nC [ia Ga] IIC T4 Gc
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas explosion protection	Ⓔ II 3 (1) G Ex nA nC [ia Ga] IIC T4 Gc
ATEX dust explosion protection	Ⓔ II (1) D [Ex ia Da] IIIC
Certificates	ATEX (BVS), Canada (FM), IECEx (BVS), Korea (KTL), SIL (exida), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Declaration of Conformity	ATEX (EUK), China (CCC)

Technical Data	
Safety Data	
Max. voltage U_e	25.6 V
Max. current I_e	96 mA
Max. power P_e	605 mW
Safety-related max. voltage	253 V
Ambient Conditions	
Ambient temperature	-20 °C ... +70 °C (Single device) -20 °C ... +60 °C (Group assembly)
Storage temperature	-40 °C ... +80 °C
Mounting / Installation	
Mounting type	DIN rail NS35/15, NS35/7.5


Technical Drawings – Subject to Alterations

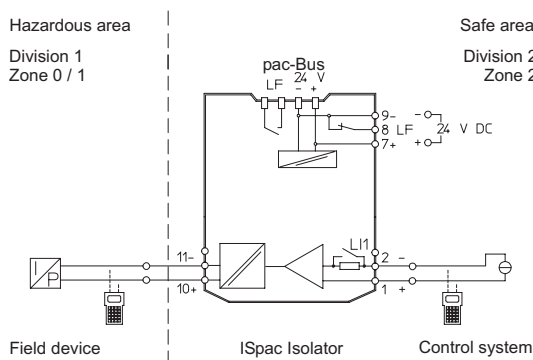

Connection diagram 9165/16-11-11

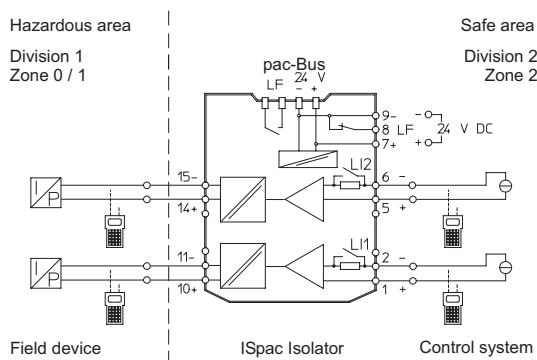


Connection diagram 9165/26-11-11

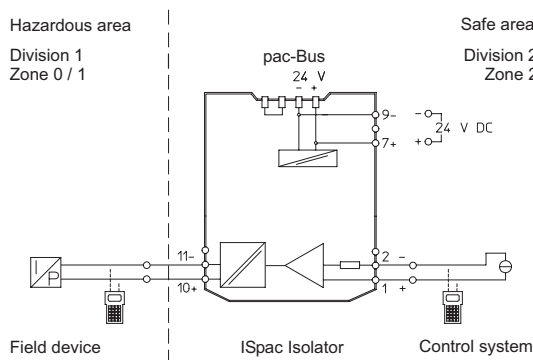


Connection diagram 9165/16-11-10

Accessories


Figure	Description	Art. No.	Weight
	For 91xx ISpac modules Yellow, transparent Clear identification of the device for SIL applications. (Packaging unit: 10 pieces)	200914	20 g

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

A3

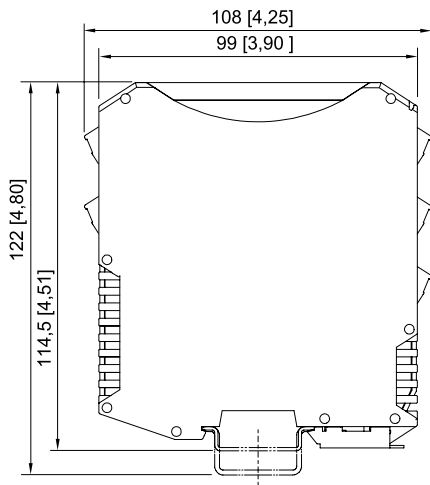

ISpac Series 9143, 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with screw terminal

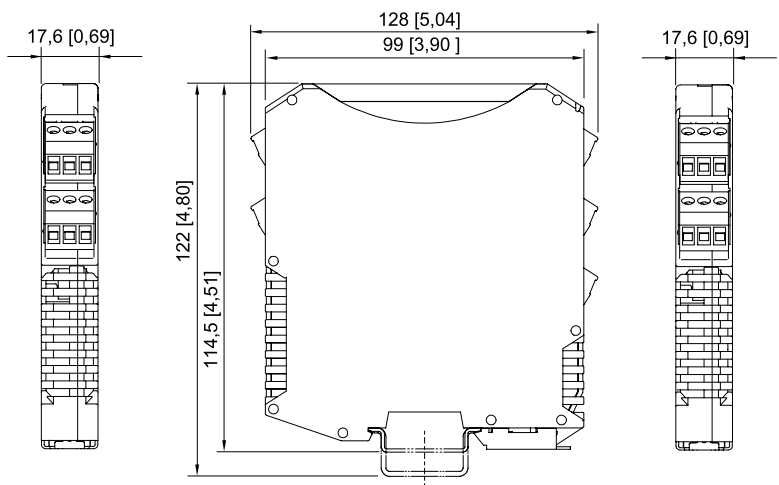

ISpac Series 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with spring clamp terminal