

Control and signalling devices

Control device for panel mounting

Ex e

8003/111 AU UL Art. No. 280086



PanSiG



- Flexible configuration thanks to pushbutton, mushroom push-button, mushroom stay-put button, mushroom stay-put button with key lock, key-operated button and key-operated switch
- Easy to install using a single hole
- Codable "latching", "spring return" and "key not removable" functions
- Spring clamp terminals with connection chamber

MY R. STAHL 8003A



R. STAHL Series 8003 switches and control buttons for panel mounting take on various switching functions in latching and spring return positions up to 6 A, which can be subsequently recoded. They are fully certified, explosion-protected equipment with an Ex e connection chamber. With the patented mounting mechanism, panel mounting with drilled holes or openings of 30.5 mm is quick and easy.

Compatible actuators are available for a comprehensive range of applications.

Technical Data

Explosion Protection

| | |
|---------------------------------|---|
| Scope of validity | European Union (ATEX) CEC IECEX NEC |
| Application range (zones) | 1 2 21 22 |
| IECEX gas certificate | IECEX PTB 06.0065X |
| IECEX gas explosion protection | Ex db eb IIC T6 Gb |
| IECEX dust certificate | IECEX PTB 06.0065X |
| IECEX dust explosion protection | Ex tb IIIC T80 °C Db |
| ATEX gas certificate | PTB 02 ATEX 1057 X |
| ATEX gas explosion protection | ⊕ II 2 G Ex db eb IIC T6 Gb |
| ATEX dust certificate | PTB 02 ATEX 1057 X |
| ATEX dust explosion protection | ⊕ II 2 D Ex tb IIIC T80 °C Db |
| Certificates | ATEX (PTB), Canada (UL), IECEX (PTB), Korea (KGS), USA (UL) |
| Declaration of Conformity | ATEX (EUK), ATEX (Simple apparatus), China (CCC), Declaration of Conformity (ATEX) |
| Notes | Product label may vary. Series devices are labelled with ATEX, IECEX, NEC® and CE Code. |

Electrical Data

| | |
|------------------------------|----------------------------|
| Rated operational voltage AC | 500 V |
| Rated operational current | 6 A |
| Switching capacity AC-12 | 500 V / 6 A / max. 3000 VA |
| Switching capacity AC-15 | 400 V / 6 A / max. 1250 VA |
| Switching capacity DC-13 | 110 V / 1 A / max. 110 W |

Control and signalling devices

Control device for panel mounting

Ex e

8003/111 AU UL Art. No. 280086



Electrical Data

| | |
|---|----------|
| Switching capacity DC-13<SoftReturn/>2 contact elements in series | 60 V/6 A |
|---|----------|

Ambient Conditions

| | |
|--------------------------|--------------------|
| Ambient temperature | -20 °C ... +60 °C |
| Ambient temperature | -4 °F ... +140 °F |
| Ambient temperature NEC® | -30 °C ... +60 °C |
| Ambient temperature NEC® | -22 °F ... +140 °F |

Mechanical Data

| | |
|---------------------------------------|------------------------------------|
| Degree of protection (IP) (IEC 60529) | Reverse side IP65, front side IP66 |
| Enclosure material | Polyamide |
| Contact material | Gold-plated |
| Number of NCs | 1 |
| Number of NOs | 1 |
| Connection cross-section | 0.75 ... 1.5 mm ² |
| Connection cross-section AWG | 18 AWG ... 12 AWG |
| Depth of cut-out | 130 mm |
| Mounting depth, inches | 5.12 in |
| Service life, min. | 10 ⁵ operating cycles |
| Weight | 125 g |
| Weight | 0.28 lb |


Mounting / Installation

| | |
|--------------------------|--------------|
| Tightening torque | 3 Nm |
| Tightening torque lbf in | 26.55 lbf in |




Components

| | |
|---------------|--|
| Actuator note | Switching element only; please order actuator separately |
| Entry 1 | 8161/7-M16-0902 |
| Entry 1 type | Polyamide cable gland, black |

Technical Drawings – Subject to Alterations



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

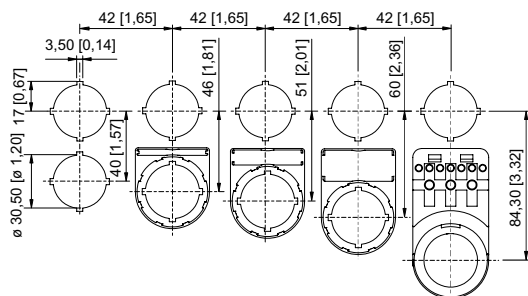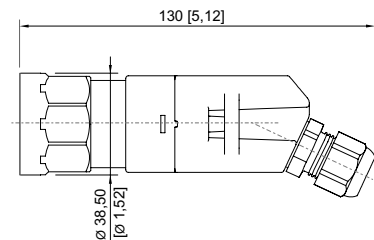

Cut-out with/without additional designation plate

Control and signalling devices



Control device for panel mounting

Ex e

8003/111 AU UL Art. No. 280086



Spare Parts

| Label holder | | Art. No. |
|--|--|----------|
|  | Label holder, size 3, without insert disc Labelling: 1-, 2- or 3-line can be installed in dia. 30.5 mm drilled holes for actuators | 155844 |
| Closing part | | Art. No. |
|  | 8602C3-733-B for closing unused holes in cover, dia. 30.5 mm, NBR | 244306 |
| | 8602C3-733-S for closing unused holes in cover, dia. 30.5 mm, silicone | 244307 |

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.