

8174/103-0604-11 Art. No. 139669



- Current lead-in for Ex d enclosures
- 1 to 72 conductors combined in one current lead-in
- Series: screw-in, plug-in
- For voltages up to max. 1000 V
- For size conductor up to 70 mm²

WebCode 8174A



The conductor bushings are used to provide the wire connection between „flameproof“ enclosures and „increased safety“ enclosures.

The conductors are potted with high-quality, creepage-resistant PU-resin and are thus insulated from the enclosure wall.

Technical Data

Explosion Protection

Application range (zones)	1 2
IECEX gas certificate	IECEX PTB 06.0081U
IECEX gas explosion protection	Ex db IIC Gb
IECEX firedamp certificate	IECEX PTB 06.0081U
IECEX firedamp protection	Ex db I Mb
ATEX gas certificate	PTB 01 ATEX 1065 U
ATEX gas explosion protection	⊕ II 2 G Ex db IIC Gb
ATEX firedamp certificate	PTB 01 ATEX 1065 U
ATEX firedamp protection	⊕ I M2 Ex db I Mb
Certificates	ATEX (PTB), IECEX (PTB)

Ambient Conditions

Ambient temperature	-40 °C ... +110 °C
---------------------	--------------------

Mechanical Data


Conductor length Ex d	1000 mm
Conductor length Ex e	1000 mm
Conductor cross-section min.	4 mm ²
Number of cores	6
Thread size	M33
Thread pitch	1,5
Colour of conductor	Black
Weight	0.627 kg
Weight	1.38 lb

8174/103-0604-11 Art. No. 139669

Technical Drawings – Subject to Alterations


Strombelastbarkeit

von Leitungen 4 mm² in M33 x 1,5 / ø 34

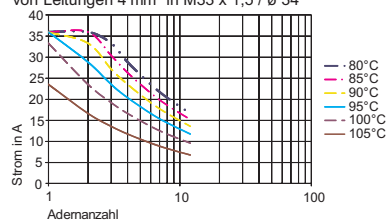


Current loading of

4 mm² of cables in M33 x 1,5 / ø 34

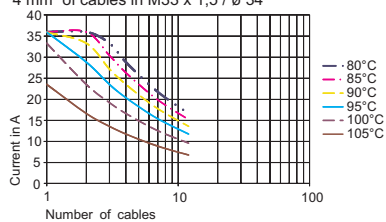

Intensité du courant des câbles

4 mm² dans M33 x 1,5 / ø 34

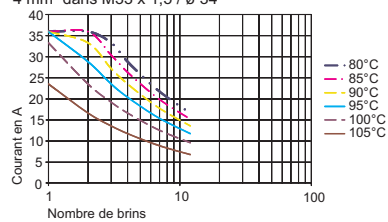

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.