

## Small fuse element

6.300 A

8560/51-4272 Art. No. 149168



- Cost-effective miniature fuse for control circuits
- Disconnect characteristics of fast, medium fast and slow
- Terminal cover with finger protection: IP20

MY R. STAHL 8560A



The R. STAHL Series 8560 small fuse element is a cost-effective miniature fuse for control circuits. It is designed for rated operational voltages up to 500 V and rated operational currents up to 6.3 A and is available with various disconnect characteristics. It is snap-mounted on normal rails (TS 15, 35, 32). The terminal cover with finger protection meets the specifications of the degree of protection IP20.

### Technical Data

#### Explosion Protection

Scope of validity	European Union (ATEX) IECEX
Application range (zones)	1 2
IECEX gas certificate	IECEX PTB 06.0056U
IECEX gas explosion protection	Ex eb mb IIC T4 Gb
ATEX gas certificate	PTB 99 ATEX 2158 U
ATEX gas explosion protection	Ⓔ II 2 G Ex eb mb IIC T4 Gb
Certificates	ATEX (PTB), Brazil (ULB), IECEX (PTB)
Notes	Product label may vary. Series devices have certification according to ATEX and IECEX.

#### Electrical Data

Rated operational voltage AC	250 V
Rated operational current	6.3 A
Rated breaking capacity max	63 A
Characteristic	Time lag

#### Ambient Conditions

Ambient temperature	-50 °C ... +70 °C (T4)
Ambient temperature	-58 °F ... +158 °F
Storage temperature	-25 °C ... +70 °C
Storage temperature	-13 °F ... +158 °F

#### Mechanical Data

Degree of protection (IP)	IP20
Enclosure material	Polyamide
Connection cross section	0.75 ... 2.5 mm <sup>2</sup>
Connection cross-section AWG	20 AWG ... 14 AWG

## Small fuse element

6.300 A

8560/51-4272 Art. No. 149168


### Mechanical Data

Type of connection cable	Finely stranded Stranded
Width	18.5 mm
Width in inches	0.73 in
Height	40 mm
Height, inches	1.58 in
Length	46 mm
Length, inches	1.81 in
Packaging unit	5
Weight	210 g
Weight	0.46 lb
Note	The fuse can be snap-mounted on the following mounting rails: DIN rail TS 15 (according to DIN EN 60715) DIN rail TS 35 x 7.5 (according to DIN EN 60715) G-rail TS 32 (according to DIN EN 60715) Replacement of the fuse must only be performed when the system is disconnected.

### Mounting / Installation


Tightening torque	1.2 Nm
Tightening torque lbf in	10.62 lbf in

### Technical Drawings – Subject to Alterations

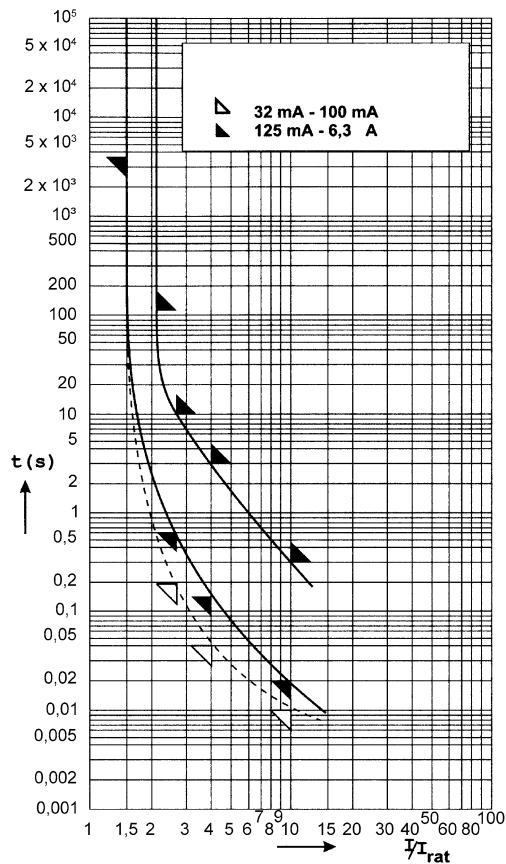

8560/51-...2, 250 V, time lag

#### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

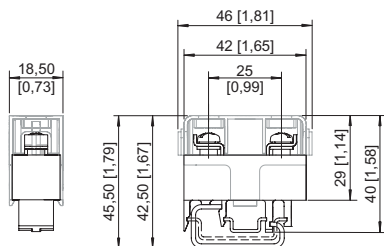

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.