

Safety barriers

Single-channel safety barriers

STAHL**INTRINSPAK**

9001/01-280-085-101 Art. No. 158351



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, potential-free contacts and many more
- Compact and space-saving devices that are easy to install on a DIN rail
- Quick to install as barriers can be simultaneously snapped onto the rail and connected to PE

MY R. STAHL 9001A

The series 9001 INTRINSPAK single-channel safety barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of safety barriers cover a wide variety of signals. The devices are incredibly robust and require little space. The back-up fuse is a convenient feature as it is standardised for all variants.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0 1 2 20 21 22
IECEx gas certificate	IECEx PTB 09.0001X
IECEx gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEx dust certificate	IECEx PTB 09.0001X
IECEx dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2088 X
ATEX gas explosion protection	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	PTB 01 ATEX 2088 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
FMus certificate	3011002
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4, Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, Groups IIC/IIB Hazardous location when inst. per doc. 90 016 11 31 1
Certificate ULus	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS A,B,C,D,E,F,G; per doc. 90 016 11 31 3
cCSA certificate	1284547

9001/01-280-085-101 Art. No. 158351

Explosion Protection

Marking cCSA	Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D; Provides IS circuits for Class I,II,III, Class I, Zone 0, Groups IIC/IIB For applicable grps per inst. doc. 90 016 11 31 2
Inmetro gas certificate	UL-BR 12.0353
Inmetro dust certificate	UL-BR 12.0353
Certificates	ATEX (PTB), Brazil (ULB), Canada (CSA), China (NEPSI), IECEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	in Zone 2, Division 2 and in safe areas
Further information	See relevant certificate and operating instructions

Safety Data

Max. voltage U_o	28 V
Max. current I_o	85 mA
Max. power P_o	595 mW
Max. permissible external capacity C_o for IIC	0.083 μ F
Max. permissible external capacity C_o for IIB	0.65 μ F
Max. permissible external inductance L_o for IIC	2.4 mH
Max. permissible external inductance L_o for IIB	16 mH
Intrinsically safe limiting values Inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o
IIC	L_o [mH] 1 mH 0.200 mH C_o [μ F] 0.053 μ F 0.083 μ F
IIB	L_o [mH] 10 mH 1 mH 0.100 mH C_o [μ F] 0.250 μ F 0.35 μ F 0.65 μ F

Electrical Data

Number of channels	1
Maximum resistance R_{max}	375 Ω
Minimum resistance R_{min}	340 Ω
Maximum output current I_{max}	64 mA
Potential	Positive
Transmission frequency channel 1	\leq 100 kHz
I_{leak} leakage current for U_n	\leq 2 μ A

Auxiliary Power

Nominal voltage	24 V DC
Power supply	Controlled

Ambient Conditions

Ambient temperature	-20 °C ... 60 °C
Ambient temperature	-4°F ... +140°F
Storage temperature	-20 °C ... 75 °C
Storage temperature	-4°F ... +167°F
Maximum relative humidity	95% average, no condensation

9001/01-280-085-101 Art. No. 158351

Table with 2 columns: Parameter and Value. Sections include Ambient Conditions, Mechanical Data, and Mounting / Installation.

Technical Drawings – Subject to Alterations






Image B

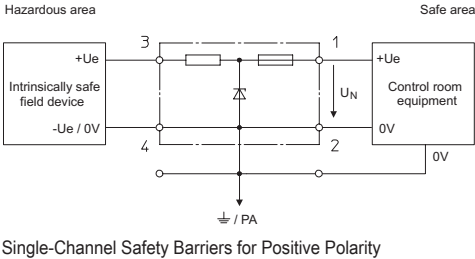

9001/01-280-085-101 Art. No. 158351

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

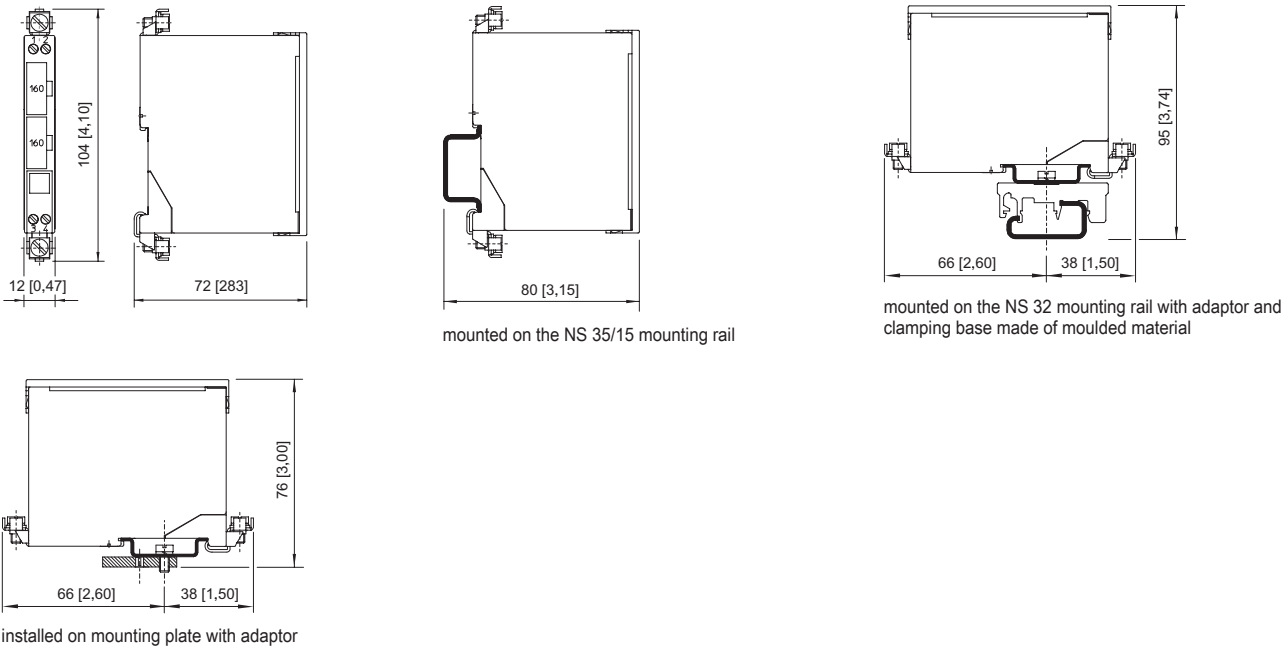


Accessories

Table with 2 columns: Accessory Name and Art. No.
Rows include:
- Adaptor (Art. No. 158826): The adaptor enables a series 900x safety barrier to be installed on a mounting plate from a previous series.
- Clamping base, moulded material (Art. No. 165283): Enables the safety barrier to be mounted on a G-rail.
- Protective conductor terminal (Art. No. 112760): USLKG 5 (clamping range 4 mm²). The terminal enables protective conductors to be connected to the DIN rail. Colour green-yellow.
- Earthing terminal (Art. No. 112599): USLKG 6 N (clamping range 6 mm²). The terminal enables protective conductors/earthing conductors to be connected to the DIN rail. Colour green-yellow.
- Fuse holder (Art. No. 158834): The fuse holder is snapped onto the side of a safety barrier and can be equipped with up to five back-up fuses (replacement).



Safety barriers
Single-channel safety barriers



9001/01-280-085-101 Art. No. 158351

Insulation and fastening material		Art. No.
	Suitable for the NS 35/15 DIN rail, makes it possible to install the DIN rail such that it is electrically insulated from the mounting plate.	158828

Spare Parts

Back-up fuse		Art. No.
	For all series 9001, 9002 and 9004 safety barriers Packaging unit: 5 pieces	158964
Label carrier		Art. No.
	Transparent cover for the label	158977

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.