

Safety barriers

Single-channel safety barriers



9001/51-280-091-141 Art. No. 158524



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, potential-free contacts and many more
- Compact and space-saving devices that are easy to install on a DIN rail
- Quick to install as barriers can be simultaneously snapped onto the rail and connected to PE

MY R. STAHL 9001A



The series 9001 INTRINSPAK single-channel safety barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of safety barriers cover a wide variety of signals. The devices are incredibly robust and require little space. The back-up fuse is a convenient feature as it is standardised for all variants.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX PTB 09.0001X
IECEX gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX PTB 09.0001X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2088 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	PTB 01 ATEX 2088 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
FMus certificate	3011002
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4, Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, Groups IIC/IIB Hazardous location when inst. per doc. 90 016 11 31 1
Certificate ULus	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS A,B,C,D,E,F,G; per doc. 90 016 11 31 3
cCSA certificate	1284547

Safety barriers

Single-channel safety barriers



9001/51-280-091-141 Art. No. 158524

Explosion Protection

Marking cCSA	Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D; Provides IS circuits for Class I,II,III, Class I, Zone 0, Groups IIC/IIB For applicable grps per inst. doc. 90 016 11 31 2
Inmetro gas certificate	UL-BR 12.0353
Inmetro dust certificate	UL-BR 12.0353
Certificates	ATEX (PTB), Brazil (ULB), Canada (CSA), China (NEPSI), IECEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	in Zone 2, Division 2 and in safe areas
Further information	See relevant certificate and operating instructions

Safety Data

Max. voltage U_o	28 V								
Max. current I_o	91 mA								
Max. power P_o	637 mW								
Max. permissible external capacity C_o for IIC	0.083 μ F								
Max. permissible external capacity C_o for IIB	0.65 μ F								
Max. permissible external inductance L_o for IIC	2.2 mH								
Max. permissible external inductance L_o for IIB	14 mH								
Intrinsically safe limiting values Inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o								
IIC	<table border="1"> <tr> <td>L_o [mH]</td> <td>1 mH</td> <td>0.200 mH</td> </tr> <tr> <td>C_o [μF]</td> <td>0.052 μF</td> <td>0.083 μF</td> </tr> </table>	L_o [mH]	1 mH	0.200 mH	C_o [μ F]	0.052 μ F	0.083 μ F		
L_o [mH]	1 mH	0.200 mH							
C_o [μ F]	0.052 μ F	0.083 μ F							
IIB	<table border="1"> <tr> <td>L_o [mH]</td> <td>10 mH</td> <td>1 mH</td> <td>0.100 mH</td> </tr> <tr> <td>C_o [μF]</td> <td>0.250 μF</td> <td>0.35 μF</td> <td>0.65 μF</td> </tr> </table>	L_o [mH]	10 mH	1 mH	0.100 mH	C_o [μ F]	0.250 μ F	0.35 μ F	0.65 μ F
L_o [mH]	10 mH	1 mH	0.100 mH						
C_o [μ F]	0.250 μ F	0.35 μ F	0.65 μ F						

Electrical Data

Number of channels	1
Maximum output current I_{max}	< 91 mA
Potential	Positive/for transmitter
Transmission frequency channel 1	\leq 100 kHz
I_{leak} leakage current for U_n	\leq 2 μ A

Auxiliary Power

Nominal voltage	20 to 35 V DC
Power supply	Uncontrolled

Ambient Conditions

Ambient temperature	-20 °C ... 50 °C
Ambient temperature	-4°F ... +122°F
Storage temperature	-20 °C ... 75 °C
Storage temperature	-4°F ... +167°F
Maximum relative humidity	95% average, no condensation
Temperature influence	\leq 0,25 %/10K

9001/51-280-091-141 Art. No. 158524

Mechanical Data

Degree of protection (IP)	IP40
Degree of protection note	according to IEC 60529
Degree of protection (IP) terminals	IP20
Enclosure material	Polyamide 6GF
Number of connection terminals	4
Connection cross-section max.	1.5 mm ²
Connection cross-section AWG	16 AWG
Type of connection cable	Solid Finely stranded
Width	103 mm
Width, inches	4.09 in
Length	12 mm
Length, inches	0.48 in
Depth of cut-out	72 mm
Mounting depth, inches	2.76 in
Weight	110 g
Weight	0.24 lb

Mounting / Installation

Earthing connection cross-section	4 mm ²
Earthing conductor cross-section AWG	12 AWG
Connection type	2 PA
Min. torque, Nm	0.5 Nm
Min. torque, lb/in	4.43 lb/in
Max. torque, Nm	0.6 Nm
Max. torque, lb/in	5.31 lb/in

Technical Drawings – Subject to Alterations







Image L

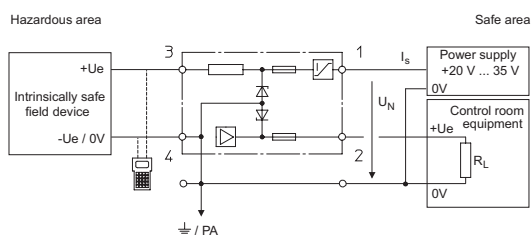


Single-Channel Safety Barriers for Transmitters

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



mounted on the NS 35/15 mounting rail




mounted on the NS 32 mounting rail with adaptor and clamping base made of moulded material

Safety barriers

Single-channel safety barriers












9001/51-280-091-141 Art. No. 158524



installed on mounting plate with adaptor

Accessories

Adaptor		Art. No.
 	The adaptor enables a series 900x safety barrier to be installed on a mounting plate from a previous series.	158826
Clamping base, moulded material		Art. No.
	Enables the safety barrier to be mounted on a G-rail.	165283
Protective conductor terminal		Art. No.
	USLKG 5 (clamping range 4 mm ²) The terminal enables protective conductors to be connected to the DIN rail. Colour green-yellow.	112760
Earthing terminal		Art. No.
	USLKG 6 N (clamping range 6 mm ²) The terminal enables protective conductors/earthing conductors to be connected to the DIN rail. Colour green-yellow.	112599
Fuse holder		Art. No.
 	The fuse holder is snapped onto the side of a safety barrier and can be equipped with up to five back-up fuses (replacement).	158834
Insulation and fastening material		Art. No.
 	Suitable for the NS 35/15 DIN rail, makes it possible to install the DIN rail such that it is electrically insulated from the mounting plate.	158828

Spare Parts



Back-up fuse	Art. No.
--------------	----------

Safety barriers

Single-channel safety barriers



9001/51-280-091-141 Art. No. 158524

	For all series 9001, 9002 and 9004 safety barriers Packaging unit: 5 pieces	158964
Label carrier		Art. No.
	Transparent cover for the label	158977

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.