

Safety barriers

Single-channel safety barriers



9001/02-093-150-101 Art. No. 158753



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, potential-free contacts and many more
- Compact and space-saving devices that are easy to install on a DIN rail
- Quick to install as barriers can be simultaneously snapped onto the rail and connected to PE

MY R. STAHL 9001A



The series 9001 INTRINSPAK single-channel safety barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of safety barriers cover a wide variety of signals. The devices are incredibly robust and require little space. The back-up fuse is a convenient feature as it is standardised for all variants.

Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX PTB 09.0001X
IECEX gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX PTB 09.0001X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2088 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	PTB 01 ATEX 2088 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
FMus certificate	3011002
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4; Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, Groups IIC/IIB Hazardous location when inst. per doc. 90 016 11 31 1
Certificate ULus	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS A,B,C,D,E,F,G; per doc. 90 016 11 31 3
Inmetro gas certificate	UL-BR 12.0353
Inmetro dust certificate	UL-BR 12.0353
Certificates	ATEX (PTB), Brazil (ULB), Canada (FM), China (NEPSI), IECEX (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Declaration of conformity	ATEX (EUK), China (CCC)
Installation	in Zone 2, Division 2 and in safe areas
Further information	See relevant certificate and operating instructions

9001/02-093-150-101 Art. No. 158753

Safety Data

Max. voltage U_o	9.3 V			
Max. current I_o	150 mA			
Max. power P_o	348.8 mW			
Max. permissible external capacity C_o for IIC	4.1 μ F			
Max. permissible external inductance L_o for IIC	1.3 mH			
Max. permissible external capacity C_o for IIB	31 μ F			
Max. permissible external inductance L_o for IIB	7 mH			
Intrinsically safe limiting values Inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o			
IIC	L_o [mH]	2 mH	1 mH	0.100 mH
	C_o [μ F]	0.590 μ F	0.890 μ F	2 μ F
IIB	L_o [mH]	5 mH	1 mH	0.100 mH
	C_o [μ F]	3.300 μ F	5.90 μ F	12 μ F

Electrical Data

Number of channels	1
Type of voltage	AC/DC
Maximum resistance R_{max}	80 Ω
Minimum resistance R_{min}	70 Ω
Maximum output current I_{max}	75 mA
Potential	alternating
Transmission frequency channel 1	\leq 100 kHz
I_{leak} leakage current for U_n	\leq 2 μ A

Auxiliary Power

Nominal voltage	\pm 6 V
Power supply	Controlled

Output

Temperature influence	\leq 0,25 %/10K
-----------------------	-------------------

Ambient Conditions

Ambient temperature	-20 °C ... 60 °C
Ambient temperature	-4°F ... +140°F
Storage temperature	-20 °C ... 75 °C
Storage temperature	-4°F ... +167°F
Maximum relative humidity	95% average, no condensation

Mechanical Data

Degree of protection (IP)	IP40
Degree of protection note	according to IEC 60529
Degree of protection (IP) terminals	IP20
Enclosure material	Polyamide 6GF
Number of connection terminals	4
Connection cross section min.	1.5 mm ²
Connection cross-section max.	1.5 mm ²
Connection cross-section AWG	16 AWG

9001/02-093-150-101 Art. No. 158753

Mechanical Data

Type of connection cable	Finely stranded Solid
Width	103 mm
Width, inches	4.09 in
Length	12 mm
Length in inches	0.48 in
Mounting depth	72 mm
Mounting depth in inches	2.76 in
Weight	110 g
Weight	0.24 lb

Mounting / Installation

Earthing connection cross-section	4 mm ²
Earthing conductor cross-section AWG	12 AWG
Connection type	2 PA
Min. torque, Nm	0.5 N · m
Min. torque, lb/in	4.43 lb/in
Max. torque, Nm	0.6 N · m
Max. torque, lb/in	5.31 lb/in

Technical Drawings – Subject to Alterations







Image F

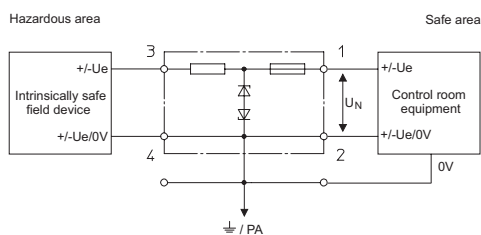


Single-Channel Safety Barriers for Alternating Polarity


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



mounted on the NS 35/15 mounting rail



mounted on the NS 32 mounting rail with adaptor and clamping base made of moulded material



installed on mounting plate with adaptor

Safety barriers


Single-channel safety barriers




9001/02-093-150-101 Art. No. 158753

Accessories


Terminal block

		Art. No.
	Phoenix Contact terminal block UT 4-PE	113057
	Phoenix Contact terminal block UT 6-PE	113058


Adaptor

		Art. No.
	The adaptor enables a safety barrier to be installed on a clamping base (Art. No. 165283) or mounting plate from a previous series.	158826

Clamping base, moulded material


		Art. No.
	Enables the safety barrier to be mounted on a G-rail. The safety barrier is mounted using the adaptor (Art. No. 158826).	165283

Fuse holder


		Art. No.
	The fuse holder is snapped onto the side of a safety barrier and can be equipped with up to five back-up fuses (replacement).	158834

Spare Parts

Back-up fuse

		Art. No.
	For all series 9001, 9002 and 9004 safety barriers Packaging unit: 5 pieces	158964

Label carrier

		Art. No.
	Transparent cover for the label	158977

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.