



- Backlit text and graphics with dimming control
- Audible and visual alarms
- Custom made text

**MY R. STAHL T4500A**

The operator panels for TEF 4500 Commander Utility are very flexible in sizes and configurations. The panels are custom built and allow for use of text in several languages. With a dimmable backlight these are easy to read in daylight as well as at night. Several panels may be connected to the same network, more typical with non-critical applications. Alarms are provided with flashing LED's as well as a buzzer for audible alarms. Alarms are acknowledged and silenced by pushing the Alarm Acknowledge button.

**APPLICATIONS:**

Deck light control panel  
Floodlight control panel  
Helideck control panel  
Heating system control panel  
Pump control panel  
Status panel  
General control pane

**Technical Data**

<b>Electrical Data</b>	
DC supply voltage	24 V
Number of RS-485 interfaces	2
<b>Auxiliary Power</b>	
Auxiliary pwr nom. voltage DC	24 V
<b>Diagnostics</b>	
Communication	RS-485
<b>Display</b>	
Backlight	Dimmable LED
<b>Mechanical Data</b>	
Degree of protection (IP)	IP22
Enclosure material	Aluminium
Number of buttons	37
Size	3
Mounting cut-out width	260 mm
Mounting cut-out height	205 mm
Weight	1.3 kg

# TRANBERG Solutions


## Utility commander Control panel

### 5 columns

TEF4500715 Art. No. 170583



#### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

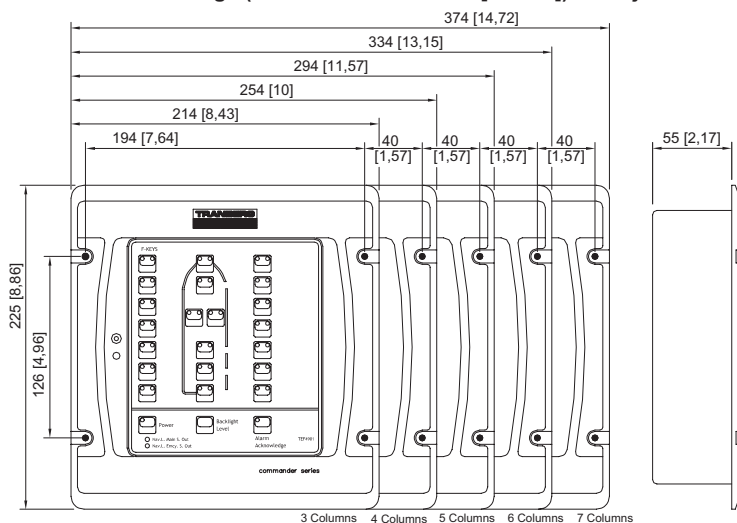

A = 260 mm; B = 205 mm

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.