

8150/5-0400-0400-150-3311 Art. No. 206570



- Ex e control boxes made of stainless steel that can be individually equipped
- The cover is either equipped with a hinge (large opening angle, 130°) and cam lock or with a screw-on cover
- Numerous standard sizes in stock

### MY R. STAHL 8150B



R. STAHL Series 8150 control and distribution boxes are made of brush-finished stainless steel (1.4301, AISI 304 or 1.4404, AISI 316L) and are extremely robust: High-quality seal materials make them suitable for an extended temperature range, while a circumferential protection channel prevents water ingress. A flange plate simplifies mounting.

## Technical Data

### Explosion Protection

Scope of validity	European Union (ATEX) IECEX
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 09.0049
IECEX gas explosion protection	Ex eb IIC T6 ... T4 Gb
IECEX dust certificate	IECEX PTB 09.0049
IECEX dust explosion protection	Ex tb IIIC T80 °C ... T130 °C Db
ATEX gas certificate	PTB 09 ATEX 1109
ATEX gas explosion protection	⊕ II 2 G Ex eb IIC T6 ... T4 Gb
ATEX dust certificate	PTB 09 ATEX 1109
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C ... T130 °C Db
Certificates	ATEX (PTB), Brazil (ULB), Canada (FM), Canada (UL), China (NEPSI), IECEX (PTB), India (PESO), Korea (KGS), Taiwan (ITRI), USA (FM), USA (UL)
Ship approval	DNVGL
Notes	Product label may vary. Series devices are labelled with ATEX and IECEX.

### Electrical Data

Rated operational voltage AC	0 ... 1000 V
Rated operational current	0 – 630 A
Notes	Depending on the built-in components.

### Ambient Conditions

Ambient temperature	-60 °C ... +40 °C (T6) (T80 °C) -60 °C ... +55 °C (T5) (T95 °C) -60 °C ... +70 °C (T4) (T130 °C)
---------------------	--

8150/5-0400-0400-150-3311 Art. No. 206570

### Ambient Conditions

Ambient temperature	-76°F ... +104°F (T6) (T80 °C) -76°F ... +131°F (T5) (T95 °C) -76°F ... +158°F (T4) (T130 °C)
---------------------	---


### Mechanical Data

Degree of protection IP (IEC 60529)	IP66
Enclosure material	Stainless steel 1.4404, (AISI 316L), brush finished
Silicone-free	No
Cover fixing type	With captive screws
Cover thickness	2 mm
Cover thickness inch	0.079 in
Wall thickness	1.5 mm
Wall thickness, inches	0.059 in
Total depth H	165 mm
Width	400 mm
Width in inches	15.748 in
Height	400 mm
Height, inches	15.748 in
Depth	150 mm
Depth, inches	5.906 in
Weight	9.92 kg
Weight	21.86 lb

### Components

Flange and plates	Without flange
Terminal rail	35 x 358 mm (1x)

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

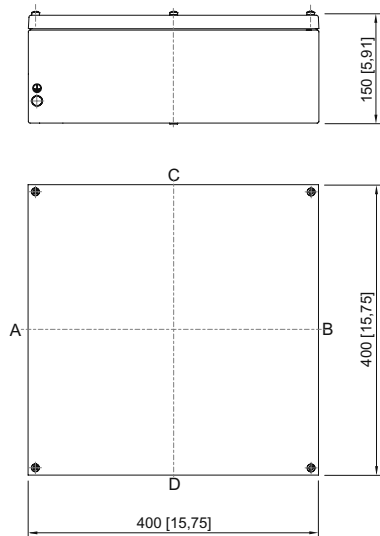

8150/-0400-0400-150-..1.

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.