

8510/132-30-100-020 Art. No. 211092



- Constant power supply for control circuits
- Protected against sustained short-circuit current, overload and idle running
- Corrosion-resistant enclosure material

MY R. STAHL 8510Y



The R. STAHL Series 8510 power supply provides a constant power supply for control circuits. It is protected against sustained short-circuit current, overload and idle running and is therefore extremely reliable in operation. It can be screwed into Ex e enclosures so that it is protected against vibrations, while easily accessible connection terminals simplify installation.

Technical Data

Explosion Protection

Application range (zones)	1, 2
IECEx gas explosion protection	Ex de IIC
IECEx firedamp protection	Ex de I
ATEX gas explosion protection	⊕ II 2 G Ex de IIC
ATEX firedamp protection	⊕ I M2 Ex de I
Certificates	Brazil (ULB), Canada (FM), China (CQST), IECEx (BVS), USA (FM)

Electrical Data

Input voltage	220 to 240 V AC
Input current	1.6 A (100 A AC)
Output current	3 A
Frequency Hz (for AC)	60 50

Output

Output voltage	24.5 V DC
----------------	-----------

Ambient Conditions

Ambient temperature	-10 °C ... +60 °C
---------------------	-------------------

Mechanical Data


Degree of protection (IP)	IP20
Enclosure material	Epoxy resin
Min. connection terminals	1.5 mm ²
Max. solid connection terminals	10 mm ²
Max. finely stranded connection terminals	6 mm ²
Type of connection cable	Solid Finely stranded
Width	115 mm
Height	130 mm
Depth	168 mm

8510/132-30-100-020 Art. No. 211092


Mechanical Data

Weight	2.6 kg
Weight	5.73 lb

Technical Drawings – Subject to Alterations



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to alterations

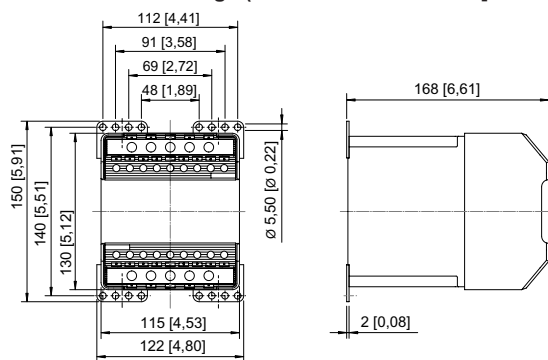

8510/132

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.