

Isolators

Transmitter supply unit With limit contact

Ex i field circuit

9162/13-11-14s Art. No. 238251



- Compact limit value switch with 2 configurable limiting values and 4 ... 20 mA output
- Suitable for 2-, 3-wire transmitter, 2-wire HART transmitter and mA-sources
- Intrinsically safe input [Ex ia] IIC
- Open-circuit and short-circuit monitoring and messaging
- For use up to SIL 2 (IEC 61508)

MY R. STAHL 9162A



9162 series transmitter supply units with limit values can be used for the intrinsically safe operation of two- and three-wire transmitters or for connecting to intrinsically safe mA sources. Two limit values can be easily set using the "ISpac Wizard" software. If the value exceeds or falls below these limit values, these units will trip an electronic contact. A wire-breakage and short-circuit monitoring function provides increased availability.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX BVS 15.0013 X
IECEX gas explosion protection	Ex nA nC [ja Ga] IIC T4 Gc
IECEX dust certificate	IECEX BVS 15.0013 X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	BVS 15 ATEX E018 X
ATEX gas explosion protection	II 3 (1) G Ex nA nC [ja Ga] IIC T4 Gc
ATEX dust certificate	BVS 15 ATEX E018 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, nA nC Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [Ex ia] IIC T4 at Ta = 70°C See Doc. 9162 6 031 001 1
Certificates	ATEX (BVS), Canada (FM), China (NEPSI), IECEX (BVS), SIL (exida), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Declaration of Conformity	ATEX (EUK), China (CCC)

Safety Data

Max. voltage U_o	27 V			
Max. current I_o	87.9 mA			
Max. current I_o (3-conductor)	88.3 mA			
Max. power P_o (3-conductor)	574 mW			
Max. power P_o	574 mW			
Max. current I_o isolation amplifier	≈ 0 mA			
Max. power P_o isolation amplifier	≈ 0 mW			
Max. permissible external capacity C_o for IIC	0.09 μ F			
Max. permissible external capacity C_o for IIB	0.705 μ F			
Max. permissible external capacity C_o for IIB (3-wire)	0.705 μ F			
Max. permissible external inductance L_o for IIC	2.3 mH			
Max. permissible external inductance L_o for IIB	14 mH			
Max. permissible external capacity C_o for IIIC	0.705 μ F			
Max. permissible external inductance L_o for IIIC	14 mH			
Max. voltage U_i	30 V			
Max. current I_i	100 mA			
Max. voltage U_o isolation amplifier	4.1 V			
Internal capacitance	Negligible			
Internal capacitance isolation amplifier	Negligible			
Internal capacitance (3-conductor)	negligible			
Internal inductance	Negligible			
Internal inductance L_i isolation amplifier	Negligible			
Internal inductance (3-conductor)	negligible			
Safety-related max. voltage	253 V			
Intrinsically safe limiting values inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o			
IIC	L_o [mH]	1 mH	0.500 mH	0.200 mH
	C_o [μ F]	0.056 μ F	0.072 μ F	0.090 μ F
IIB	L_o [mH]	10 mH	1 mH	0.200 mH
	C_o [μ F]	0.290 μ F	0.380 μ F	0.600 μ F
IIIC	L_o [mH]	10 mH	1 mH	0.200 mH
	C_o [μ F]	0.290 μ F	0.380 μ F	0.600 μ F

Functional Safety

HFT	0
SFF	90%
Lambda SD	0 FIT
Lambda SU	0 FIT
Lambda DD	436 FIT
Lambda DU	46 FIT

Functional Safety

PFD _{avg} at T _{proof} 1 year	2,23E-04
PFD _{avg} at T _{proof} 2 years	4,19E-04
PFD _{avg} at T _{proof} 5 years	1,10E-03

Electrical Data

Number of channels	1
Measuring transformer feed operation	Yes
Isolation amplifier operation	Yes
LFD relay	Yes
Communication signal	HART, 0.5 to 10 kHz
Limiting values configuration	Using ISpac Wizard (V3.04 and more recent)

Auxiliary Power

Auxiliary power	24 V DC
Auxiliary power nominal voltage	24 V DC
Auxiliary power voltage range	18 to 31.2 V
Voltage range residual ripple	≤ 3,6 V _{SS}
Nominal current	85 mA
Auxiliary power max. power dissipation	1.5 W
Power consumption	2 W
Polarity reversal protection	Yes
Undervoltage monitoring	Yes
Operation indication	Green "PWR" LED

Galvanic Isolation

Test voltage as per standard	IEC EN 60079-11
Ex i input to output	1.5 kV AC
Ex i input to auxiliary power	1.5 kV AC
Ex i input to fault message contact	1.5 kV AC
Test voltage as per standard	EN 50178
Output to auxiliary power	350 V AC
Output to output	350 V AC
Galvanic separation FMC to HE and output	350 V AC

Input

Input function	Isolation amplifier Transmitter power unit
Input	4 to 20 mA with HART
Input signal	4 to 20 mA with HART
Function range input	2 – 22 mA
Max. input current, mA sources	50 mA
Input for open-circuit voltage U _a	≤ 26 V
Short-circuit current	≤ 35 mA
Supply voltage for transmitter	≥ 16 V at 20 mA
Note about supply voltage	(T < -10 °C: US - 0.2 V / 10K)
HART input resistance (AC)	> 250 Ω
Line fault and loss of power signalisation	- Contact (30 V/100 mA), closed against earth in case of error - pac-Bus, potential-free contact (30 V/100 mA)

Input

Input resistance	30 Ω
------------------	------

Output

Output	4 to 20 mA with HART
Output signal	4 to 20 mA with HART
Function range output	2.0-22 mA
Switching delay	< 80 ms
Load resistance R_L	0 to 600 Ω (terminal 1+/2-)
Output residual ripple	≤ 40 μAeff
Load resistance influence	≤ 0,02 %
Analog signal delay	< 30 ms
Settling time 10-90%	< 45 ms
Temperature influence error limits	≤ 0.1%/10 K
Limit contact (per channel)	2 NO
Switching voltage limiting values	≤ ± 30 V
Switching current limiting values	≤ 170 mA
Limit value contact switching current (max. 1 ms)	≤ 500 mA
Switch-on resistance	≤ 2.5 ohm (typical < 1 ohm)
Switching state indication	Yellow "OUT" LED
Switch-back delay	< 100 ms
Fault message contact switching capacity	30 V / 100 mA
LF switch user adjustment	Activated/deactivated
Indication of line fault	Red "LF" LED
Wire breakage error detection input	< 3.6 mA
Short circuit error detection input	> 21 mA
Deviation	≤ 0,2 %
Auxiliary power influence error limits	≤ 0,01 %
Behaviour of the output	= input signal
Linearity error	≤ 0,1 %
Offset error	≤ 0,1 %
Deviations / error note	Information in % of the measuring range (20 mA) at U_N , 23 °C
Reclosing lockout	Reset using DIP switch or "Power off" (configurable)

Ambient Conditions

Ambient temperature	-40 °C ... +70 °C (Single device) -40 °C ... +60 °C (Group assembly)
Ambient temperature	-40 °F ... +158 °F (Single device) -40 °F ... +140 °F (Group assembly)
Note	"The installation conditions affect the ambient temperature. Observe the "Cabinet installation guide""
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40 °F ... +176 °F
Maximum relative humidity	95%
Use at the height of	< 2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas


Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
AWG clamping range	24 – 12
Connection cross-section	0.2 to 2.5 mm ² flexible 0.25 to 2.5 mm ² flexible with core end sleeve
Connection cross-section AWG	24 ... 12
Grid dimension	17.6 mm
Width	17.6 mm
Width, inches	0.69 in
Height	114.5 mm
Height, inches	4.51 in
Length	108 mm
Length, inches	4.25 in
Mounting depth, inches	4.51 in
Weight	225 g
Weight	0.5 lb

Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
Mounting orientation	Vertical Horizontal
Connection type	Screw terminal
Min. rigid conductor cross section	0.2 mm ²
Max. rigid conductor cross section	2.5 mm ²
Min. flex conductor cross section	0.2 mm ²
Max. flex conductor cross section	2.5 mm ²
Connection cross-section AWG	24 – 14

Technical Drawings – Subject to Alterations

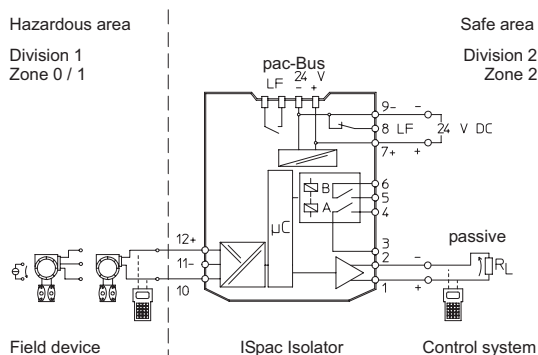

Connection diagram 9162/13-11-14

Isolators


Transmitter supply unit With limit contact

Ex i field circuit

9162/13-11-14s Art. No. 238251



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

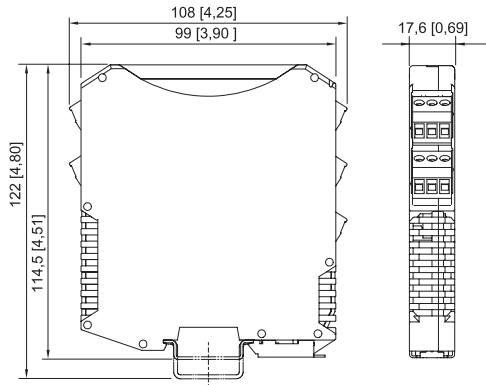

ISpac Series 9143, 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with screw terminal

Accessories

9162 Parameterisation



Parameterisation ex works optionally available for all variants.

Art. No.

270538

ISpac Wizard parameterising set



The software is used to commission, configure and diagnose Series 9146, 9162 and 9182 ISpac isolators.

For further information, see the operating instructions.

Delivery form: USB stick; parameterising software incl. parameterising cable/adaptor

System requirements:

IBM-compatible PC with MS XP, Vista, Windows 7, 10

RS 232 C interface

RS 232/USB adaptor

Art. No.

202595

Resistive coupling element



The 0/4 to 20 mA signal of channel 1 is converted to a 0/2 to 10 V signal. The resistive coupling element replaces the existing connection terminal. (Set with 5 pieces)

Art. No.

273968

Spare Parts

Screw terminal



3-pole plug, screw connector

thread: M3

stripping length: 7 mm

colour: green

Art. No.

112817



3-pole plug, screw connector

thread: M3

stripping length: 7 mm

colour: black

Art. No.

112816






Isolators

Transmitter supply unit With limit contact

Ex i field circuit

9162/13-11-14s Art. No. 238251



	3-pole plug, screw connector thread: M3 stripping length: 7 mm colour: blue	112818
Screw terminal with test tap		Art. No.
	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: black	113005
	3-pole plug with test tap, screw connector thread: M3 stripping length: 7 mm colour: blue	113004
Spring clamp terminal		Art. No.
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: green	112825
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: black	112824
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: blue	112826

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.