

Installation equipment and accessories

Cable gland For low temperature



8161/8-M63-4834-LT Art. No. 239217



- For safely running cables into Ex e and Ex i areas
- Can be used in a temperature range from -60 to +75 °C, degree of protection IP68
- Available in Ex e and Ex i versions; the Ex i version is identified by a blue cap nut
- Cable dia. ranges from 1 to 48 mm
- Versions with multi-seal inserts

MY R. STAHL 8161B



R. STAHL's Series 8161/7 and 8161/8 cable glands can be used to safely run cables into Ex e enclosures. They are suitable for cable diameters between 1 and 48 mm. They are available for Ex e and Ex i electrical circuits – the Ex i version can be distinguished by its blue cap nut. A stopping plug for unused entries can be integrated into the entries.

Technical Data

Explosion Protection

Ex version	Ex i
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 14.0011 X
IECEX gas explosion protection	Ex eb IIC Gb
IECEX dust certificate	IECEX PTB 14.0011 X
IECEX dust explosion protection	Ex tb IIIC Db
ATEX gas certificate	PTB 14 ATEX 1008 X
ATEX gas explosion protection	⊕ II 2 G Ex eb IIC Gb
ATEX dust certificate	PTB 14 ATEX 1008 X
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC Db
Certificates	ATEX (PTB), Brazil (ULB), IECEX (PTB), Korea (KGS)
Declaration of Conformity	ATEX (EUK)

Ambient Conditions

Ambient temperature	-60 °C ... +75 °C
Use at the height of	< 2000 m

Mechanical Data

Strain relief	No
Degree of protection (IP)	IP66
Degree of protection note	IP68 at 5 bar 30 min. (IP protection according to IEC/EN 60529)
Sealing material	SI profile seal
Sealing ring material	SI
Material	Polyamide
Material 2	Glass fibre reinforced
Silicone-free	No

Installation equipment and accessories

Cable gland For low temperature

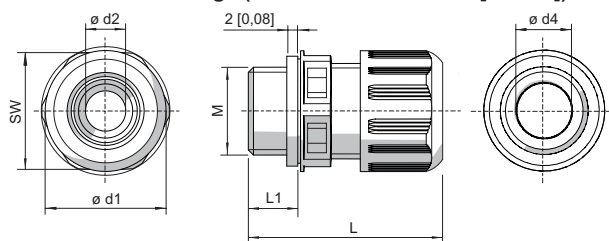


8161/8-M63-4834-LT Art. No. 239217

Mechanical Data

Self-extinguishing	Yes
Flame-retardant	Yes
Halogen-free	Yes
Surface resistance	$\leq 10^{13} \Omega$
Clamping range	34-48 mm
Armouring type	Unarmoured cable types
Clamping range	34 ... 48 mm
Total length	64 to 78 mm
Dimension d1	75 mm
Dimension d2	48.3 mm
Dimension d4	53 mm
Width across corners	75 mm
Width across flats	68 mm
Thread size	M63
Thread length	15 mm
Thread pitch	1,5 mm
Impact strength (IEC 60079)	4 J
Impact strength	7 J
Colour	Blue
Lot size	1
Weight	155 g
Weight	0.34 lb

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



M = Thread size
 SW = Width across flats
 L1 = Thread length
 L = Total length

Cable glands without bend protection

Thread size	Width across flats	Total length	Total length (with long thread)	Thread length	Thread length (long thread)	Clamping range	Clamping range + reduction sealing insert	Di- men- sion d1	Di- men- sion d2	Di- men- sion d4
M12	16.00 mm	29 to 34 mm	35 to 40 mm	9 mm	15 mm	3-6 mm	1-6 mm	18 mm	7.3 mm	6.3 mm
M16	20.00 mm	31 to 37 mm	37 to 43 mm	9 mm	15 mm	5-9 mm	2-9 mm	22 mm	10.3 mm	9.3 mm
M20	24.00 mm	36 to 43 mm	41 to 48 mm	10 mm	15 mm	7-13 mm	4-13 mm	27 mm	13.3 mm	13.3 mm
M25	29.00 mm	38 to 46 mm	43 to 51 mm	10 mm	15 mm	10-17 mm	7-17 mm	32 mm	17.3 mm	17.3 mm

Installation equipment and accessories

Cable gland For low temperature



8161/8-M63-4834-LT Art. No. 239217


M32	36.00 mm	42 to 50 mm	45 to 53 mm	12 mm	15 mm	13-21 mm	9-21 mm	40 mm	21.3 mm	21.3 mm
M40	46.00 mm	52 to 65 mm	58 to 71 mm	12 mm	18 mm	17-28 mm	12-28 mm	51 mm	28.3 mm	30 mm
M50	55.00 mm	59 to 72 mm	63 to 76 mm	14 mm	18 mm	23-35 mm	16-35 mm	61 mm	35.3 mm	40 mm
M63	68.00 mm	64 to 78 mm	67 to 81 mm	15 mm	18 mm	34-48 mm	28-48 mm	75 mm	48.3 mm	53 mm

Accessories

Jam nut, nickel-plated brass (-60 to +75 °C)

For mounting the cable entries in through holes

Art. No.

	Material: Nickel-plated brass Thread size: M63	Lot size: 10	241565
----------------------------------------------------------------------------------	---------------------------------------------------	--------------	--------

Jam nut, plastic (-40 to +75 °C)

For mounting the cable entries in through holes


Art. No.

	Material: Polyamide Thread size: M63	Lot size: 10	239467
-----------------------------------------------------------------------------------	-----------------------------------------	--------------	--------

Reduction sealing insert (standard), EPDM (-40 to +75 °C)

For cable glands


Art. No.

	Connection thread: M63 x 1.5 Clamping range: 28 to 38 mm	Batch size: 10	239451
------------------------------------------------------------------------------------	-------------------------------------------------------------	----------------	--------

Reduction sealing insert, silicone (-60 to +75 °C)

For low temperatures

Art. No.


	Connection thread: M63 x 1.5 Cable dia. range: 28 to 38 mm	Lot size: 10	239459
------------------------------------------------------------------------------------	---------------------------------------------------------------	--------------	--------

Plug (-60 to +75 °C; depending on the cable gland used)

For sealing unused cable glands

Material: Polyamide

Art. No.

	Diameter: 35 mm	Lot size: 10	240060
	Diameter: 48 mm	Lot size: 10	240062

Spare Parts

Flat seal (standard), EPDM (-40 to +75 °C)

Replacement seals for cable glands


Art. No.

Installation equipment and accessories

Cable gland For low temperature




8161/8-M63-4834-LT Art. No. 239217

	For cable glands 8161/.-M63-48 Lot size: 100 Connection thread: M63	222376
	For cable glands 8161/.-M63-48 Lot size: 50 Connection thread: M63	222369

Silicone flat seal (-60 to +75 °C)

Replacement seals for low temperatures

Art. No.

	For cable glands 8161/.-M63-48 Lot size: 100 Connection thread: M63	240254
----------------------------------------------------------------------------------	------------------------------------------------------------------------	--------

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.