

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-687-DVI3-MM



- KVM Operator Station, 24"WU display, 1920 x 1200
- Zone 2, 22 unit
- Optional resistive glass or foil touch screen
- Data transmission via multi-mode fibre optic up to 550 m


WebCode **MT687A**



The OS MT-687-DVI3 HMI series includes KVM operator stations for hazardous zones 2 and 22. Their brilliant 24" WU widescreen displays with a resolution of 1920 x 1200 pixels (format 16:10), and are available with or without touch screen. The stainless steel enclosures (SS304 or SS316L) are available with a front opening or in cleanroom-compliant design and with different mounting options. Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data is transmitted via multi-mode fibre optic up to 550 m.

## KVM SYSTEMS INTEGRATION

### PC WORKSTATIONS

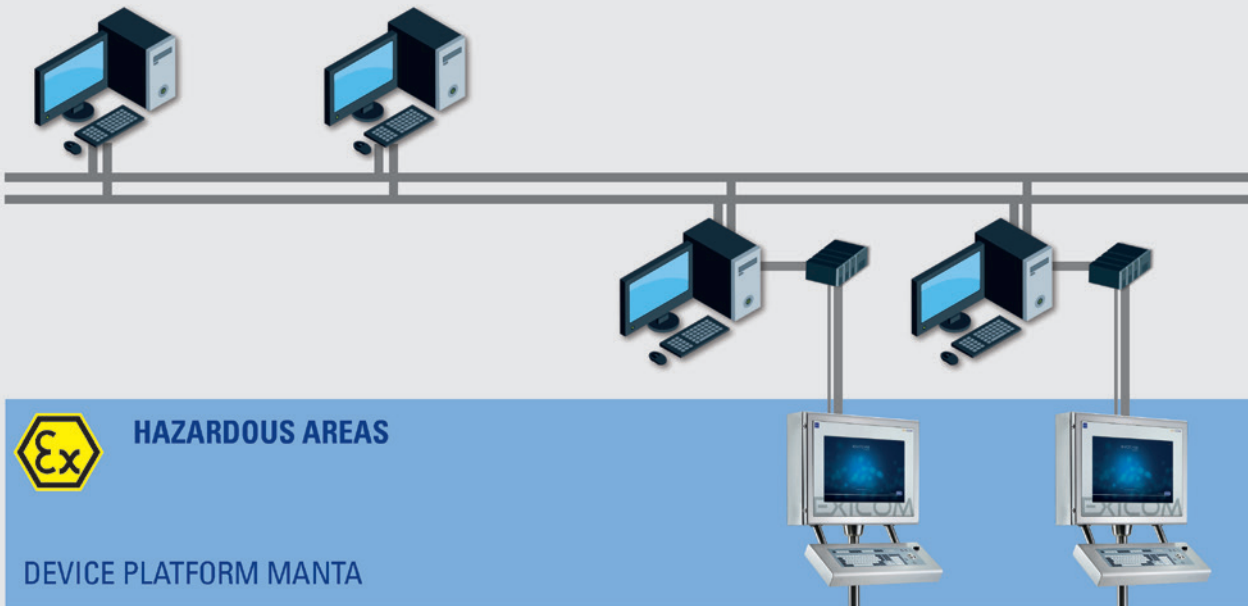

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-687-DVI3-MM



## Technical Data

### General

Series	Product Series OS MT-687 (discontinued)
Product description	24" KVM system
Technology	Remote HMI KVM
HMI type	Operator Station
WebCode	MT687A

### Explosion Protection

Application range (zones)	2 22
Certifications	ATEX, IECEx, EAC, CNEX
IECEx certification	IECEx BVS 14.0034X
ATEX certification	BVS 12 ATEX E 033 X
CNEX certification	CNEX14.2205X
Notice certification	The certificates and explosion protection markings apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these.
IECEx gas explosion protection	Ex nA nR [ja op is Ga] IIC T4 Gc
IECEx dust explosion protection	Ex tc IIIC [ja op is Da] IP66 T110°C Dc
ATEX gas explosion protection	II 3(1) G Ex nA nR [ja op is Ga] IIC T4 Gc
ATEX dust explosion protection	II 3(1) D Ex tc IIIC [ja op is Da] IP66 T110°C Dc
CNEX gas explosion protection	Ex nA nR [ja op is Ga] IIC T4 Gc
CNEX dust explosion protection	Ex tc IIIC [ja op is Da] IP66 T110°C Dc

### Electrical Data

Rated operational voltage DC	24 V
Voltage range DC	20 – 30 V
Rated operational voltage AC	230 V
Voltage range AC	100 – 240 V
Power consumption DC	3 A
Power consumption AC 1	1 A
Protection fuse DC	5 AT
Protection fuse AC	5 AT
Rated operational power	typ. 50 W / 100 W with O30 / max. 150 W (typ. 170 BTU / 341 BTU with O30 / max. 510 BTU)
Transfer technology	KVM-DVI3
Ethernet / Data	FO multi-mode
Data cable	50/125 µm FO cable or 62.5/125 µm FO cable
Data cable length	max. 550 m, with 50 µm FO cable max. 300 m, with 62.5 µm FO cable
Interface medium	Multi-mode optical fibre cable
Frequency range	50 – 60 Hz
Interface USB	2 x USB (Ex ia) 1 x USB (Ex nA) 2 x USB (Ex ia) (keyboard, pointing device)
Interface serial	1 x RS-232 (Ex nA)

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-687-DVI3-MM



## Electrical Data

Interface audio	1 x Audio Line in / out (Ex nA)
WLAN	optional via USB
Connection compartment	Power supply direct in integrated connection box
Connections	via spring clamp terminals, green
Wiring	flexible cable up to 2.5 mm <sup>2</sup> (AWG14) fixed cable up to 4 mm <sup>2</sup> (AWG12)
Plug version FO	LC duplex connector
Max. input voltage U <sub>m</sub>	250 VAC

## Display

Display version	TFT Colour display
Display version 2	16.7 million colours
Display size inch	24
Display size centimetres	61
Display resolution	WUXGA
Total pixels	1920 x 1200
Display dimensions	16:10
Display brightness	300 cd/m <sup>2</sup>
Display contrast	1000:1
Touchscreen	Optional resistive
Touchscreen technology	5-wire glass or membrane touch
Backlight	LED Technology
Backlight service life	50 000 h at +20 °C
Front plate (display)	Aluminium

## Ambient Conditions

Ambient temperature operation	-20 °C ... +55 °C
Ambient temperature operation 1	-30 °C ... +55 °C with heater version O30
Storage temperature	-30 °C ... +70 °C
Cold start temperature	-10 °C
Temperature note 1	The O30 version is only available for the AC version devices !
Temperature note 2	Operating temperature +55 °C for a maximum of 5 h, for constant operation (24/7) +50 °C.
Temperature note 3	Cold start temperature: If the HMI device is switched on at a temperature below -10 °C the display will need a certain amount of time to warm up until everything is clearly visible. Depending on how low the temperature is, this process may last up to 3 hours.
Temperature note general	The temperature details apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these.

## Mechanical Data

Dimensions (WxHxD)	740 mm x 872 mm x 400 mm
Weight	58.5 kg
Material front	Aluminium / stainless steel
Material back	Stainless steel
Ingress protection	IP66
Breather	optional

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-687-DVI3-MM



## Mechanical Data

Mechanical data note	The mechanical data apply to an FR enclosure with display and keyboard. Other enclosure types as well as any additional built-in or added components may have an impact on / change these.
----------------------	--

## Mounting / Installation

Enclosure type	Stainless steel enclosure (FR) optional clean room (CFR)
Mounting option	Wall, elbow, stand

## Components

Keyboard	optional, 107 keys with trackball / joystick / mouse / touchpad (Ex ia)
----------	---

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.