

TEF10582562 Art. No. 259551



- High degree of protection IP66/67 is standard, IP67 without breather
- Manufactured in acid proof stainless steel (AISI 316L)
- Stainless steel type label spot welded to the cover
- Several earthing alternatives
- Maximum strength and corrosion resistance
- High operational reliability
- Low lifetime maintenance cost
- Recommended for up to 4 heating cables

MY R. STAHL T1058I



Tranberg's thermostats are represented in most of the oil installations in the North Sea, petrochemical industry and other industries subjected to rough environments.

Tranberg has designed and manufactured heat tracing equipment and heating applications for rough environments for more than 25 years.

Our product range includes a number of different heat tracing junction boxes.

Technical Data

Explosion Protection

Application range (zones)	1 2
IECEX gas certificate	IECEX PRE 14.0001
IECEX gas explosion protection	Ex db eb IIC T6
ATEX gas certificate	Presafe 14 ATEX 4124
ATEX gas explosion protection	Ex II 2 G Ex db eb IIC T6

Electrical Data

Rated operational voltage AC	230 V
Rated operational current	16 A (T6)
Measuring range	0 to 200 °C

Output

Max. output AC load condition	L-4 2 (0.4) A cos φ 1 (0.6) L-2 16 (2.5) A cos φ 1 (0.6)
-------------------------------	---

Ambient Conditions

Ambient temperature	-50 °C ... +50 °C
---------------------	-------------------

Mechanical Data

Degree of protection (IP)	IP66 / IP67
Enclosure material	Stainless steel 1.4404, Electropolished
Contacts	1 change-over contact
Capillary tube diameter	6/1.5 mm
Capillary tube length	1 m
Weight	-

Components


Drilled holes	6 x M25
Cable glands and entries	1 x M25 Ø 13 to 17 mm
Material cable gland	Brass

TEF10582562 Art. No. 259551


Components

Stopping plugs	6 x M25 x 1.5
Stopping plug material	Brass
Breather	M25
Entry 1	1 x Brass cable glands E204//622/D9 M25 Ø 13 ... 17 mm
Entry 2	6 x Stopping plugs Brass M25 x 1,5
Entry 3	1 x Breather Brass M25 x 1,5
Entry 6	2 x Transition unit M25
Type of terminals 1	3 x Supply 2-conductor, 10 mm ² , grey
Type of terminals 2	5 x Output terminal 2-conductor, 2.5 mm ² , grey
Type of terminals PE 1	4 x Phoenix USLKG 2-conductor, 10 mm ² , green-yellow
Accessories	Included in delivery

Technical Drawings – Subject to Alterations

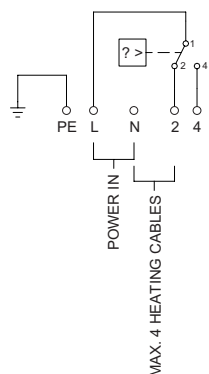

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

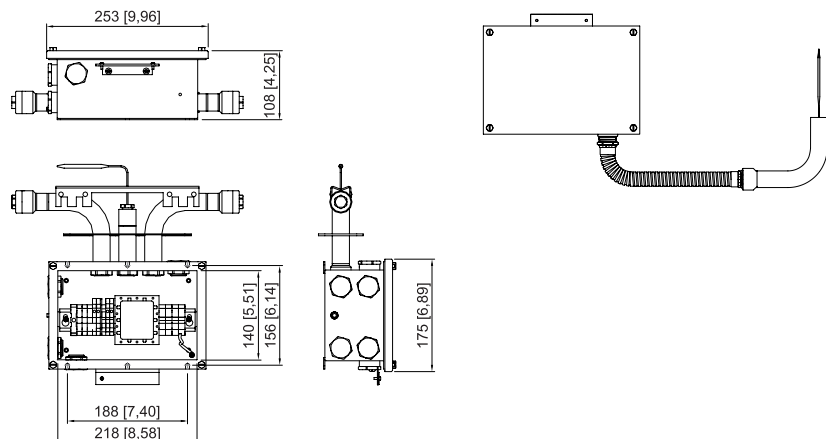

TEF10582562 Art. No. 259551

Accessories

Cable gland Ex e		Art. No.
	E204/622 M25/D1/9 mm (Ø 15 – 20.1 mm), with lock nut	259237
	E204/622 M25/D9/9 mm (Ø 13 – 17 mm), with lock nut	259253
Connection kit, pipe mounting		Art. No.
	5x11 / 5x15, M28x1 COLD for all Raychem cables	264286
	5x11 / 5x15, M28x1 HOT for all Raychem cables	264287
Termination kit, pipe mounting		Art. No.
	5x15, M28x1, COLD for Raychem cables 8BTV-10BTV-20QTV-XTV-KTV	264296
	5x15, M28x1, HOT for Raychem cables 8BTV-10BTV-20QTV-XTV-KTV	264299
	5x11, M28x1, HOT for Raychem cables 3BTV-5BTV-10QTV-15QTV-XTV-KTV-VPL	264292
	5x11, M28x1, COLD for Raychem cables 3BTV-5BTV-10QTV-15QTV-XTV-KTV-VPL	264294

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.