

Isolators

Transmitter supply unit

Ex i field circuit

9260/23-11-10k Art. No. 261389



- Universal use for 2-wire transmitters and mA sources (4-wire transmitter)
- Slim design – 12.5 mm wide – for one- and two-channel versions
- Can be used for safety levels up to SIL 2 (IEC/EN 61508)

MY R. STAHL 9260A



Series 9260 Ex i transmitter supply units are used for the intrinsically safe operation of transmitters. The device transmits HART signals in both directions. The range includes one- and two-channel devices, as well as a variant for signal duplication.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEx gas certificate	IECEx BVS 17.0081X
IECEx gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEx dust certificate	IECEx BVS 17.0081X
IECEx dust explosion protection	[Ex ia Da] IIIC
IECEX firedamp certificate	IECEx BVS 17.0081X
IECEx firedamp protection	[Ex ia Ma] I
ATEX gas certificate	BVS 17 ATEX E 089 X
ATEX gas explosion protection	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	BVS 17 ATEX E 089 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
ATEX firedamp certificate	BVS 17 ATEX E 089 X
ATEX firedamp protection	I (M1) [Ex ia Ma] I
cULus certificate	E81680
Marking cULus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, IIC T4 any mounting pos. Ta = 60°C See Doc. 9260 6 031 001 3
Certificates	ATEX (BVS), Canada (UL), China (CQM), IECEx (BVS), India (PESO), Korea (KTL), SIL (BVS), USA (UL)
Ship approval	DNV
Declaration of conformity	ATEX (EUK), China (CCC)

Safety Data

Max. voltage U_o	25.2 V
Max. current I_o	93 mA

Safety Data

Max. power P _o	587 mW						
Max. permissible external capacity C _o for IIC	0.107 µF						
Max. permissible external inductance L _o for IIC	3 mH						
Max. permissible external capacity C _o for IIB	0.82 µF						
Max. permissible external inductance L _o for IIB	14 mH						
Max. permissible external capa.IIA	2.9 µF						
Max. permissible external inductance L _o for IIA	26 mH						
Max. perm. ext. capacit. IIIC	820 µF						
Max. permis. ext. induct. IIIC	14 mH						
Max. permissible ext. capac. I	4.8 µF						
Max. permissible external inductance L _o for I	40 mH						
Internal capacitance	Negligible						
Internal inductance	Negligible						
Safety-related max. voltage	253 V AC						
Intrinsically safe limiting values inductance L _o /capacitance C _o	Jointly connectable inductance L _o /capacitance C _o						
IIC	L _o [mH]	2.200 mH	2 mH	1 mH	0.500 mH	0.200 mH	
	C _o [µF]	0.047 µF	0.049 µF	0.063 µF	0.080 µF	0.107 µF	
IIB	L _o [mH]	16 mH	1 mH	0.500 mH	0.200 mH	0.10 mH	
	C _o [µF]	0.370 µF	0.430 µF	0.510 µF	0.660 µF	0.820 µF	
IIA	L _o [mH]	26 mH	20 mH	1 mH	0.500 mH	0.100 mH	5.00 µH
	C _o [µF]	0.470 µF	0.570 µF	0.630 µF	0.720 µF	1.100 µF	
IIIC	L _o [mH]	16 mH	1 mH	0.500 mH	0.200 mH	0.10 mH	
	C _o [µF]	0.370 µF	0.430 µF	0.510 µF	0.660 µF	0.820 µF	
I	L _o [mH]	37 mH	0.200 mH	0.010 mH	0.001 mH		
	C _o [µF]	0.540 µF	1.100 µF	2.800 µF	4.150 µF		

Functional Safety

SIL	2
HFT	0
SFF	92,27%
Lambda SU	316 FIT
Lambda DD	345 FIT
Lambda DU	55 FIT
Total lambda	718 FIT
PFD _{avg} at T _{proof} 1 year	2,52E-04
PFD _{avg} at T _{proof} 2 years	4,94E-04
PFD _{avg} at T _{proof} 3 years	7,37E-04
PFD _{avg} at T _{proof} 4 years	9,79E-04
PFD _{avg} at T _{proof} 5 years	1,22E-03
PFD _{avg} at T _{proof} 7 years	1,71E-03

Functional Safety

PFDavg at Tproof 10 years	2,43E-03
---------------------------	----------

Electrical Data

Number of channels	2
Transmitter feed operation	Yes
Isolation amplifier operation	No
LFD relay	No
Communication signal	HART

Auxiliary Power

Auxiliary power	24 V DC
Auxiliary power nominal voltage	24 V DC
Auxiliary power voltage range	19.2 ... 30 V
Auxiliary pwr nom. voltage DC	24 V
Nominal current	100 mA
Max. power dissipation	1.45 W
Power consumption	2.4 W
Polarity reversal protection	Yes
Operation indication	Green "PWR" LED

Galvanic Isolation

Test voltage as per standard	EN IEC 60079-11
Ex i input to output	375 V peak value
Ex i input to auxiliary power	375 V peak value
Ex i input to Ex i input	60 V
Test voltage as per standard	EN 61010 / EN 50178
Output to auxiliary power	300 V _{eff}
Output to output	300 V _{eff}

Input

Input function	Transmitter power unit
Input	4 to 20 mA with HART
Input signal	4 to 20 mA with HART
Function range input	0 ... 24 mA
Short-circuit current	≥ 22.5 mA
Supply voltage for transmitter	≥ 16 V at 20 mA


Output

Output	4 to 20 mA with HART
Output signal	4 to 20 mA active
Function range output	0 – 24 mA
Output A	4 to 20 mA
Output B	4 to 20 mA
Behaviour of the output	= input signal
Output current at I _e =0	0 mA
Output residual ripple	< 20 mV _{eff}
Load resistance R _L	0 ... 450 Ω
Settling time 10-90%	< 200 μs
Deviations / error note	Information in % of the measuring range (20 mA) at U _N , 23 °C
Deviation	≤ 0,1 %

Output	
Typical deviation	0.05 %
Temperature influence error limits	< 0.1% / 10 K
Behaviour of the output	= input signal
Device Specific Data	
LED operating conditions	LED "PWR", green
Ambient Conditions	
Ambient temperature	-40 °C ... +70 °C (Single device) -40 °C ... 60 °C (Group assembly)
Ambient temperature	-40 °F ... +158 °F (Single device) -40 °F ... +140 °F (Group assembly)
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40 °F ... +176 °F
Maximum relative humidity	10 to 95%
Use at the height of	< 2000 m
Max. operating altitude	2000 m
Electromagnetic compatibility	EN 61326-1 Use in industrial environment Immunity according to EN 61000-6-2 Interference emission to EN 61000-6-4
Mechanical Data	
Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Min. rigid conductor cross section	0.2 mm ²
Max. rigid conductor cross section	1.5 mm ²
Min. flexible conductor cross section	0.2 mm ²
Max. flexible conductor cross section	1.5 mm ²
Width	12.5 mm
Width, inches	0.49 in
Height	114.5 mm
Height in inches	4.51 in
Length	112.5 mm
Length in inches	4.43 in
Weight	195 g
Weight	0.43 lb
Mounting / Installation	
Mounting type	DIN rail NS35/15, NS35/7.5
Grid dimension	12.5 mm
Mounting orientation	Horizontal Vertical
Connection type	Spring clamp terminal
Connection cross-section AWG	24 ... 16


Technical Drawings – Subject to Alterations

Transmitter supply unit
Ex i field circuit
9260/23-11-10k Art. No. 261389

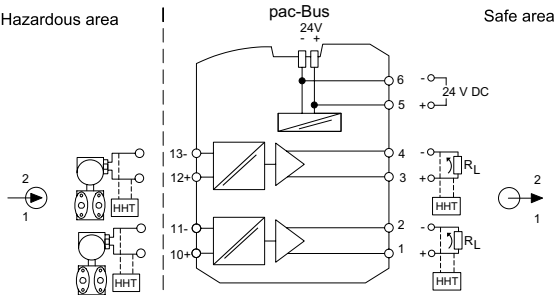


9260/23-11-10 connection diagram

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

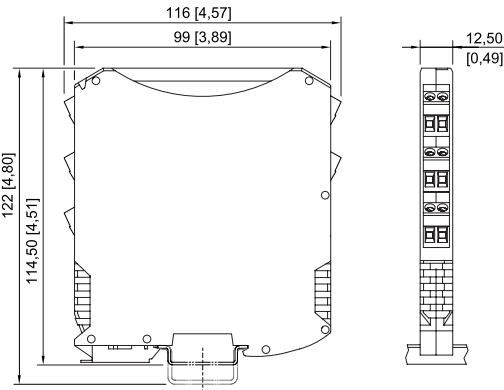

ISpac Series 9260, 9270, 9275, 9276, 9282 with spring clamp terminal

Accessories

Supply module		Art. No.
	Redundant supply of 24 V DC auxiliary power (with fuse) and reading out the collective error message from Series 92xx ISpac modules which support this function. Screw terminal connection	268183
	Redundant supply of 24 V DC auxiliary power (with fuse) and reading out the collective error message from Series 92xx ISpac modules which support this function. Spring clamp terminal connection	268184
pac-Bus		Art. No.
	Wiring auxiliary power and collective error message	262928

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.