

# Isolators

Loop-powered binary output

Ex i field circuit

9276/10-21-40-00s Art. No. 261441



- An extensive portfolio for a wide variety of solenoid valves
- Slim design saves space – just 12.5 mm wide
- For use up to SIL 3 (IEC/EN 61508)

MY R. STAHL 9276A



The Series 9276 binary outputs transmit signals for the intrinsically safe operation of Ex i solenoid valves, indicator lamps and horns. The devices do not require a separate auxiliary power supply as they are powered by the control circuit. The intrinsically safe outputs are galvanically separated from the inputs.

## Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX IBE 17.0045X
IECEX gas certificate	IECEX IBE 17.0045X
IECEX gas explosion protection	Ex nA [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX IBE 17.0045X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	IBExU 17 ATEX 1153 X
ATEX gas certificate	IBExU 17 ATEX 1153 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
ATEX dust certificate	IBExU 17 ATEX 1153 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
cULus certificate	E81680
Marking cULus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, AEx/Ex nA Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [AEx ia]/[Ex ia] IIC T4 any mounting pos. Ta = 60°C See Doc. 9276 6 031 001 3
Certificates	ATEX (IBE), Canada (UL), China (CQM), IECEX (IBE), Korea (KTL), SIL (exida), USA (UL)
Ship approval	DNV
Declaration of Conformity	ATEX (EUK), China (CCC)
Safety Data	
Max. voltage $U_o$	25.1 V
Max. current $I_o$ (Ex ia)	87 mA
Max. power $P_o$	550 mW

# Isolators

Loop-powered binary output

Ex i field circuit

9276/10-21-40-00s Art. No. 261441



## Safety Data

Max. permissible external capacity $C_o$ for IIC	0.108 $\mu$ F												
Max. permissible external inductance $L_o$ for IIC	5 mH												
Max. permissible external capacity $C_o$ for IIB	0.83 $\mu$ F												
Max. permissible external inductance $L_o$ for IIB	20 mH												
Max. permissible external capa.IIA	2.93 $\mu$ F												
Max. permissible external inductance $L_o$ for IIA	45 mH												
Max. permissible external capacity $C_o$ for IIIC	0.83 $\mu$ F												
Max. permissible external inductance $L_o$ for IIIC	20 mH												
Max. permissible external capacity $C_o$ for I	2.93 $\mu$ F												
Max. permissible external inductance $L_o$ for I	45 mH												
Internal capacitance	Negligible												
Internal inductance	Negligible												
Safety-related max. voltage	253 V AC												
Intrinsically safe limiting values inductance $L_o$ /capacitance $C_o$	Jointly connectable inductance $L_o$ /capacitance $C_o$												
IIC	<table border="1"><tr><td><math>L_o</math> [mH]</td><td>2 mH</td><td>1 mH</td><td>0.500 mH</td><td>0.200 mH</td><td>0.100 mH</td></tr><tr><td><math>C_o</math> [<math>\mu</math>F]</td><td>0.052 <math>\mu</math>F</td><td>0.065 <math>\mu</math>F</td><td>0.082 <math>\mu</math>F</td><td>0.108 <math>\mu</math>F</td><td>0.108 <math>\mu</math>F</td></tr></table>	$L_o$ [mH]	2 mH	1 mH	0.500 mH	0.200 mH	0.100 mH	$C_o$ [ $\mu$ F]	0.052 $\mu$ F	0.065 $\mu$ F	0.082 $\mu$ F	0.108 $\mu$ F	0.108 $\mu$ F
$L_o$ [mH]	2 mH	1 mH	0.500 mH	0.200 mH	0.100 mH								
$C_o$ [ $\mu$ F]	0.052 $\mu$ F	0.065 $\mu$ F	0.082 $\mu$ F	0.108 $\mu$ F	0.108 $\mu$ F								
IIB	<table border="1"><tr><td><math>L_o</math> [mH]</td><td>10 mH</td><td>5 mH</td><td>1 mH</td><td>0.100 mH</td><td></td></tr><tr><td><math>C_o</math> [<math>\mu</math>F]</td><td>0.380 <math>\mu</math>F</td><td>0.380 <math>\mu</math>F</td><td>0.440 <math>\mu</math>F</td><td>0.820 <math>\mu</math>F</td><td></td></tr></table>	$L_o$ [mH]	10 mH	5 mH	1 mH	0.100 mH		$C_o$ [ $\mu$ F]	0.380 $\mu$ F	0.380 $\mu$ F	0.440 $\mu$ F	0.820 $\mu$ F	
$L_o$ [mH]	10 mH	5 mH	1 mH	0.100 mH									
$C_o$ [ $\mu$ F]	0.380 $\mu$ F	0.380 $\mu$ F	0.440 $\mu$ F	0.820 $\mu$ F									
IIA	<table border="1"><tr><td><math>L_o</math> [mH]</td><td>20 mH</td><td>5 mH</td><td>1 mH</td><td>0.100 mH</td><td></td></tr><tr><td><math>C_o</math> [<math>\mu</math>F]</td><td>0.600 <math>\mu</math>F</td><td>0.610 <math>\mu</math>F</td><td>0.640 <math>\mu</math>F</td><td>1 <math>\mu</math>F</td><td></td></tr></table>	$L_o$ [mH]	20 mH	5 mH	1 mH	0.100 mH		$C_o$ [ $\mu$ F]	0.600 $\mu$ F	0.610 $\mu$ F	0.640 $\mu$ F	1 $\mu$ F	
$L_o$ [mH]	20 mH	5 mH	1 mH	0.100 mH									
$C_o$ [ $\mu$ F]	0.600 $\mu$ F	0.610 $\mu$ F	0.640 $\mu$ F	1 $\mu$ F									
IIIC	<table border="1"><tr><td><math>L_o</math> [mH]</td><td>10 mH</td><td>5 mH</td><td>1 mH</td><td>0.100 mH</td><td></td></tr><tr><td><math>C_o</math> [<math>\mu</math>F]</td><td>0.380 <math>\mu</math>F</td><td>0.380 <math>\mu</math>F</td><td>0.440 <math>\mu</math>F</td><td>0.820 <math>\mu</math>F</td><td></td></tr></table>	$L_o$ [mH]	10 mH	5 mH	1 mH	0.100 mH		$C_o$ [ $\mu$ F]	0.380 $\mu$ F	0.380 $\mu$ F	0.440 $\mu$ F	0.820 $\mu$ F	
$L_o$ [mH]	10 mH	5 mH	1 mH	0.100 mH									
$C_o$ [ $\mu$ F]	0.380 $\mu$ F	0.380 $\mu$ F	0.440 $\mu$ F	0.820 $\mu$ F									
I	<table border="1"><tr><td><math>L_o</math> [mH]</td><td>20 mH</td><td>5 mH</td><td>1 mH</td><td>0.100 mH</td><td></td></tr><tr><td><math>C_o</math> [<math>\mu</math>F]</td><td>0.600 <math>\mu</math>F</td><td>0.610 <math>\mu</math>F</td><td>0.640 <math>\mu</math>F</td><td>1 <math>\mu</math>F</td><td></td></tr></table>	$L_o$ [mH]	20 mH	5 mH	1 mH	0.100 mH		$C_o$ [ $\mu$ F]	0.600 $\mu$ F	0.610 $\mu$ F	0.640 $\mu$ F	1 $\mu$ F	
$L_o$ [mH]	20 mH	5 mH	1 mH	0.100 mH									
$C_o$ [ $\mu$ F]	0.600 $\mu$ F	0.610 $\mu$ F	0.640 $\mu$ F	1 $\mu$ F									

## Functional Safety

SIL	3
HFT	0
SFF	100%
Lambda SD	0 FIT
Lambda SU	50 FIT
Lambda DD	0 FIT
Lambda DU	0 FIT

## Electrical Data

Number of channels	1
--------------------	---

## Auxiliary Power

Auxiliary power	without
Max. power dissipation	1.06 W

# Isolators

Loop-powered binary output

Ex i field circuit

9276/10-21-40-00s Art. No. 261441



## Auxiliary Power

Polarity reversal protection	Yes
------------------------------	-----

## Galvanic Isolation

Test voltage as per standard	IEC EN 60079-11
------------------------------	-----------------

Galvanic separation Ex i output to input	375 V AC peak value
------------------------------------------	---------------------

## Input

Input voltage for ON	15 – 30 V
----------------------	-----------

Input voltage for OFF	0 – 5 V
-----------------------	---------

## Output

Output open-circuit voltage $U_a$	21.9 V
-----------------------------------	--------

Max. output current $I_{a\max}$	40 mA
---------------------------------	-------

Output internal resistance $R_i$	287 $\Omega$
----------------------------------	--------------

Switching delay ON/OFF	$\leq 20$ ms
------------------------	--------------

Switching delay OFF/ON	$\leq 20$ ms
------------------------	--------------

Response time output	20 ms
----------------------	-------

Switching state indication	LED
----------------------------	-----

## Ambient Conditions

Ambient temperature	-40 °C ... +60 °C
---------------------	-------------------

Ambient temperature	-4 °F ... +140 °F
---------------------	-------------------

Storage temperature	-40 °C ... +80 °C
---------------------	-------------------

Storage temperature	-40 °F ... +176 °F
---------------------	--------------------

Maximum relative humidity	10 to 95%
---------------------------	-----------

Use at the height of	< 2000 m
----------------------	----------

Electromagnetic compatibility	EN 61326-1 For use in industrial areas Immunity according to EN 61000-6-2 Interference radiation according to EN 61000-6-4
-------------------------------	----------------------------------------------------------------------------------------------------------------------------------

## Mechanical Data

Degree of protection (IP)	IP30
---------------------------	------

Degree of protection (IP) terminals	IP20
-------------------------------------	------

Fire resistance (UL 94)	V0
-------------------------	----

Enclosure material	Polyamide
--------------------	-----------

Grid dimension	12.5 mm
----------------	---------

Width	12.5 mm
-------	---------

Width, inches	0.49 in
---------------	---------

Height	114.5 mm
--------	----------

Height in inches	4.51 in
------------------	---------

Length	112.5 mm
--------	----------

Length in inches	4.43 in
------------------	---------

Weight	165 g
--------	-------

Weight	0.36 lb
--------	---------

## Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
---------------	----------------------------

Mounting orientation	Vertical Horizontal
----------------------	------------------------

Connection type	Screw terminal
-----------------	----------------

Min. rigid conductor cross section	0.2 mm <sup>2</sup>
------------------------------------	---------------------

# Isolators

Loop-powered binary output

Ex i field circuit


9276/10-21-40-00s Art. No. 261441




## Mounting / Installation

Max. rigid conductor cross section	2.5 mm <sup>2</sup>
Min. flex conductor cross section	0.2 mm <sup>2</sup>
Max. flex conductor cross section	2.5 mm <sup>2</sup>
Connection cross-section AWG	24 ... 14

## Technical Drawings – Subject to Alterations

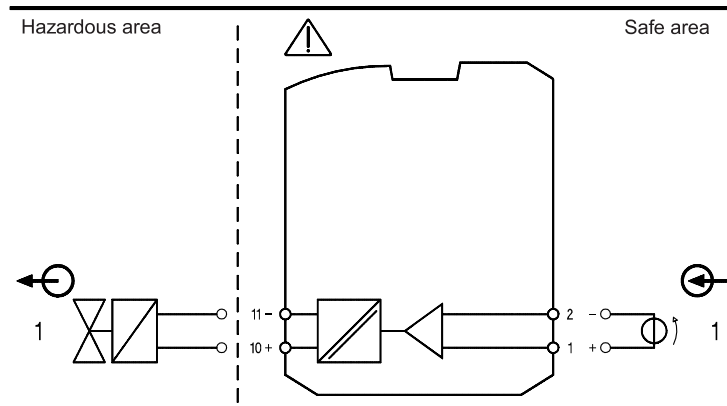


9276/10-21-25-00 connection diagram

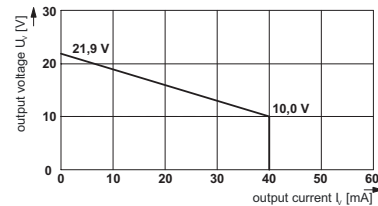

Output characteristic curve 9276/10-21-40-00

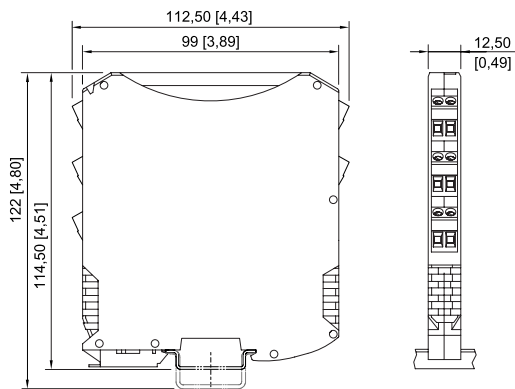

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations




ISpac Series 9260, 9265, 9270, 9275, 9276, 9282 with screw terminal

## Accessories

### Supply module

	Art. No.
 <p>Redundant supply of 24 V DC auxiliary power (with fuse) and reading out the collective error message from Series 92xx ISpac modules which support this function. Screw terminal connection</p>	268183
 <p>Redundant supply of 24 V DC auxiliary power (with fuse) and reading out the collective error message from Series 92xx ISpac modules which support this function. Spring clamp terminal connection</p>	268184

### pac-Bus

	Art. No.
 <p>Wiring auxiliary power and collective error message</p>	262928

# Isolators

Loop-powered binary output

Ex i field circuit

9276/10-21-40-00s Art. No. 261441

---



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.