

# Installation Equipment and Accessories

## Stopping plug Flush-mounted



CMP-747-DA-M2-4 Art. No. 263665



- Ex d und Ex e metal stopping plugs
- Large selection of thread types and sizes
- Operating temperature range: -60 °C to +200 °C
- Worldwide certification, IECEX, ATEX, UL and cCSAus

MY R. STAHL 747DA



The metal Ex-d stopping plugs from the 747 series with a hexagon socket and without a projecting head enable temporary or long-term plugging of unused drilled holes. There is a wide selection of different thread sizes and types available. They have worldwide certification according to IECEX, ATEX, UL and cCSAus.

### Technical Data

#### Explosion Protection

Application range (zones)	1 2 20 21 22
IECEX gas certificate	IECEX CML 18.0177X
IECEX gas explosion protection	Ex db IIC Gb
IECEX firedamp certificate	IECEX CML 18.0177X
IECEX firedamp protection	Ex db I Mb
IECEX firedamp protection 2	Ex eb I Mb
ATEX gas certificate	CML 18ATEX1320X
ATEX gas explosion protection	⊕ II 2 G Ex db IIC Gb
ATEX firedamp certificate	CML 18ATEX1320X
ATEX firedamp protection	⊕ I M2 Ex db I Mb
ATEX firedamp protection 2	⊕ I M2 Ex eb I Mb
Notes	The product certification and certificates can be downloaded from the manufacturer's homepage ( <a href="http://www.cmp-products.com">www.cmp-products.com</a> )

#### Ambient Conditions

Ambient temperature	-60 °C ... +200 °C
---------------------	--------------------

#### Mechanical Data

Degree of protection (IP)	IP66
Material	Stainless steel
Silicone-free	Yes
Drive	Hexagon socket
Outer diameter	26.9 mm
Thread size	M20
Thread length	15 mm

# Installation Equipment and Accessories

## Stopping plug Flush-mounted




CMP-747-DA-M2-4 Art. No. 263665

### Mechanical Data

Thread pitch	1,5
Impact strength (IEC 62262)	IK10
Packaging unit	1
Weight	34 g
Weight	0.07 lb

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

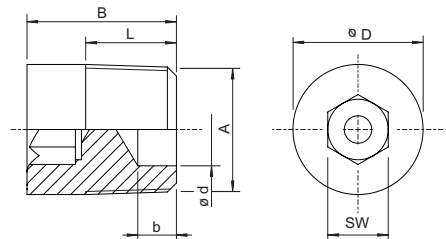

A = Thread size  
B = Length  
L = Thread length  
d = Dimension d  
b = Dimension b  
D = Outer diameter  
SW = Hexagon socket width across flats

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.