Lighting
LED floodlight

6125/2124-5601-7035-242 Art. No. 352720



- LED high-power floodlight with power consumption of up to 225 W
- Wide-range voltage input between 110 V and 277 V (50 Hz and 60 Hz)
- Suitable for operation in central battery systems and DC mains (176 V to 264 V DC)
- Three wattage classes are available: 100 W, 160 W and 225 W
- An enclosure made from stainless steel 316L is also available for marine and offshore applications.
- Optionally available with DALI interface

MY R. STAHL **6125B**

The new generation of LED floodlights for Zone 1 also relies on the tried-and-tested, robust stainless steel enclosure (optionally seawater-resistant stainless steel 316L). However, thanks to their smaller design and a new generation of drivers, they weigh significantly less, thereby improving ergonomics during installation and operation. Now with three power classes and the three tried-and-tested light distribution curves, the LED floodlight generates three colours of LED light – warm white, neutral white and cold white.

Technical Data


Explosion Protection	
Application range (zones)	1, 2, 21, 22
IECEx gas certificate	IECEx EPS 15.0087
IECEx gas explosion protection	Ex db eb op is IIC T4 Gb
IECEx dust certificate	IECEx EPS 15.0087
IECEx dust explosion protection	Ex tb op is IIIC T100 °C Db
ATEX gas certificate	EPS 15 ATEX 1 114
ATEX gas explosion protection	Ⓔx II 2 G Ex db eb op is IIC T4 Gb
ATEX dust certificate	EPS 15 ATEX 1 114
ATEX dust explosion protection	Ⓔx II 2 D Ex tb op is IIIC T100 °C Db
Certificates	ATEX (BVIS), Brazil (ULB), IECEx (BVIS), India (PESO)
Ship approval	DNV
Declaration of conformity	ATEX (EUK)
Electrical Data	
AC rated operational voltage	110 ... 277 V
Frequency range	50 – 60 Hz
Interfaces	DALI
Control gear service life	C10 ≥ 100 h, Ta ≤ 25 °C C10 ≥ 60 h, Ta ≤ 40 °C C10 ≥ 50 h, Ta ≤ 60 °C
LED service life	L90B50: 66 h
Lighting Data	
Lamp wattage	225 W
Lamp type	LED
Lamp	LED
Light colour	Neutral white

6125/2124-5601-7035-242 Art. No. 352720


Lighting Data	
Light distribution	Wide beam
Luminaire efficacy	109 lm/W
Luminous flux	24200 lm
Colour rendering	≥ 80
Colour temperature	5000 K
Ambient Conditions	
Ambient temperature	-60 °C ... +60 °C
Storage temperature	-40 °C ... +75 °C
Mechanical Data	
Degree of protection (IP)	IP66
Class	I
Enclosure material	Stain. ste. 1.4404 (AISI 316L), Powder-coated Double powder-coated
Enclosure colour	Similar to RAL 9010
Sealing material	Silicone
Pane material	Reinforced glass
Max. solid connection terminals	6 mm²
Max. finely stranded connection terminals	4 mm²
Type of connection cable	Finely stranded Solid
Width	400 mm
Height	84 mm
Length	520 mm
Impact strength (IEC 62262)	IK10
Mounting	With bracket, SS316L
Weight	19 kg
Weight	41.89 lb
Mounting / Installation	
Note about mounting	Provided
Components	
Drilled holes	4 x M25
Cable glands and entries	CMP-25A2F 2 x M25 x 1.5
Material cable gland	Nickel-plated brass
Stopping plugs	2 x M25 x 1.5
Stopping plug material	Polyamide, black

6125/2124-5601-7035-242 Art. No. 352720


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

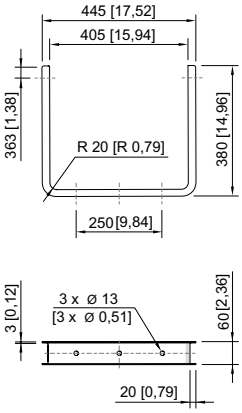



Mounting bracket

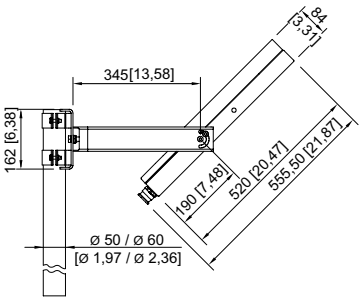



Floodlight with pole mounting




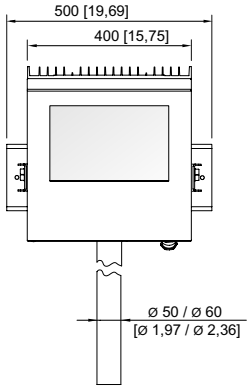


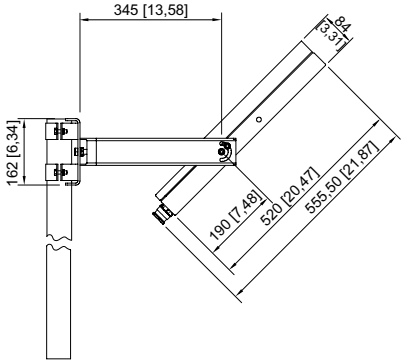















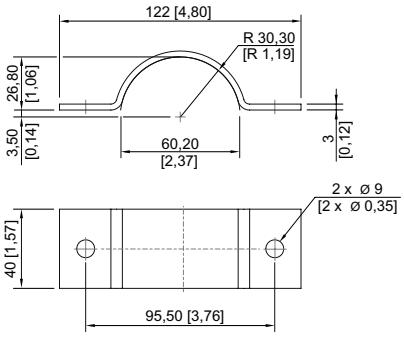



6125/2124-5601-7035-242 Art. No. 352720

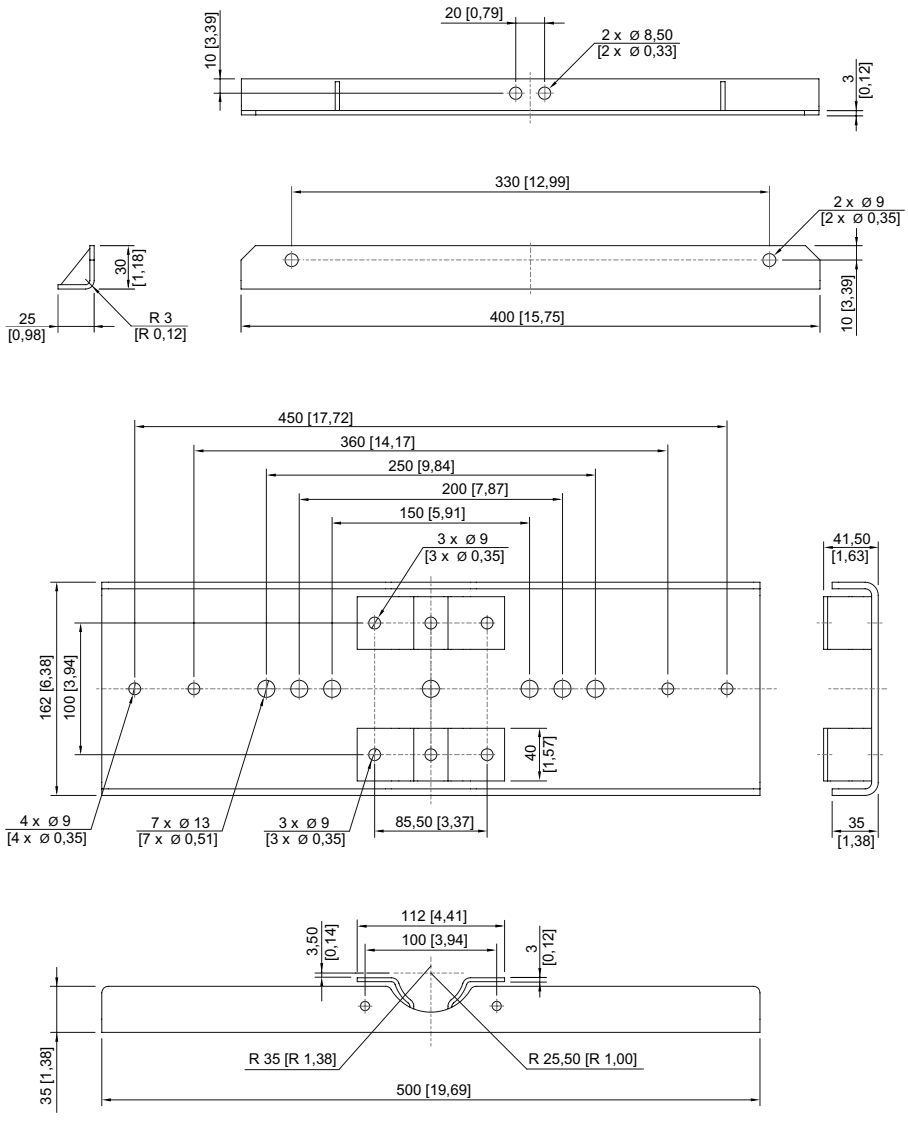


6125/2124-5601-7035-242 Art. No. 352720

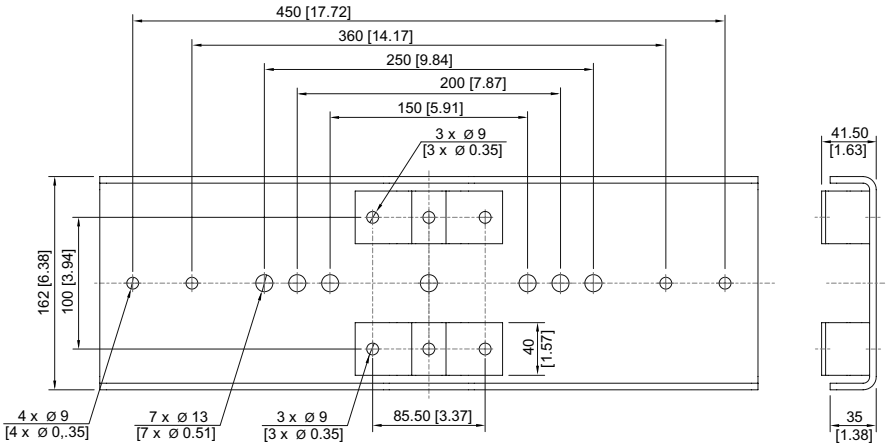


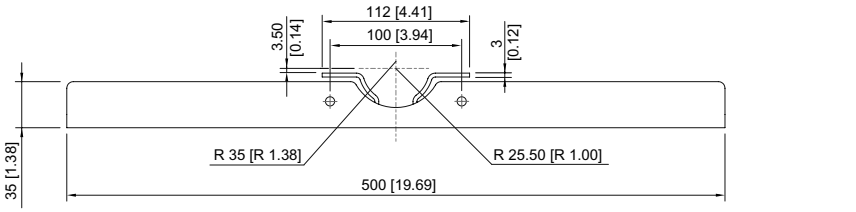


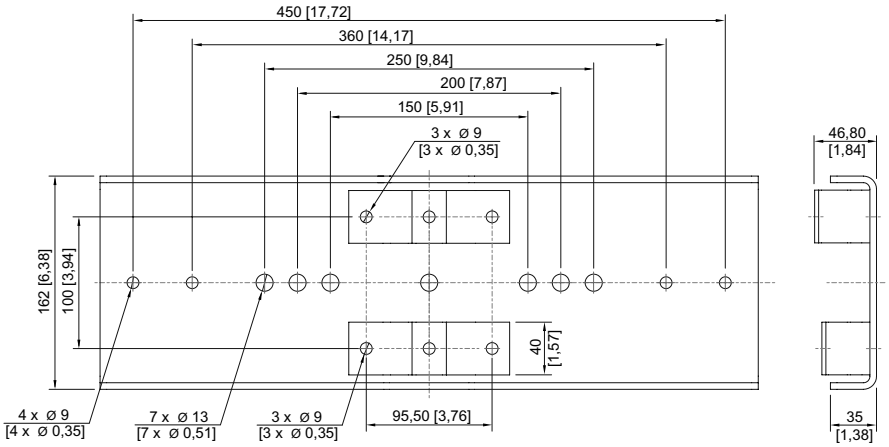

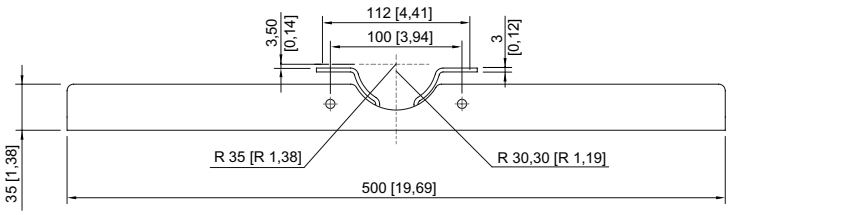




6125/2124-5601-7035-242 Art. No. 352720

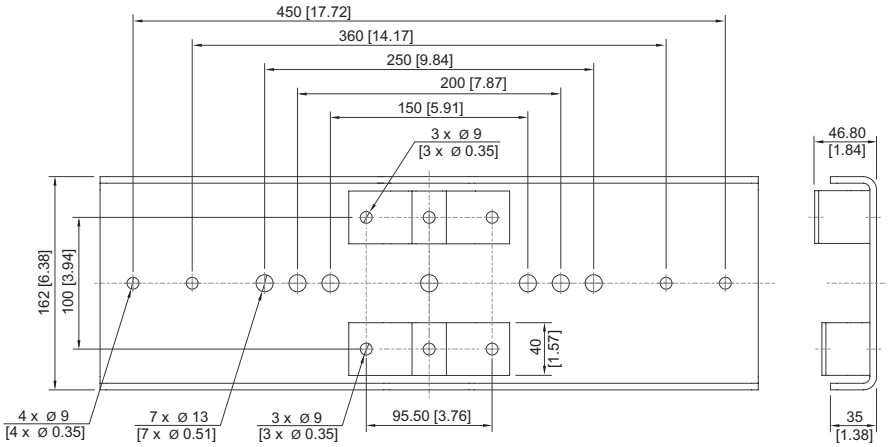

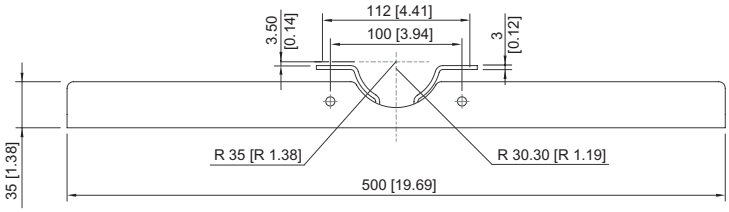

Accessories

Breather		Art. No.
	Thread: M20 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	323702
	Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	296608

Mounting set		Art. No.
	for pendant mounting with ring bolts included - stainless steel SS316L (1.4404 or V4A) without powder coating	257464
	for pole mounting with pole diameter of 50 mm - stainless steel SS316L (1.4404 or V4A) without powder coating	283361
	for pole mounting with pole diameter of 60 mm - stainless steel SS316L (1.4404 or V4A) without powder coating	263824

Ring bolt		Art. No.
	M6 (4 pieces), direct mounting in insert nuts	254234

Mounting bracket		Art. No.
	Sheet steel, single powder coated	244604
	Stainless steel SS316L (1.4404 or V4A) without powder coating	221589

6125/2124-5601-7035-242 Art. No. 352720

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.