

8579/12-506 Art. No. 270910



- Large temperature range of use
- High mechanical impact and shock resistance
- Perfect protection against penetration of liquids and dusts
- 3D data for download on the website

MY R. STAHL 8579E



The R. STAHL Series 8579/12 plugs for Zone 1/21 are 4- or 5-pole versions up to 63 A. They can be plugged and unplugged simply and easily thanks to floating pins. The pivoting strain relief makes it easier to install the cable. Self-cleaning and corrosion-free plug pins made from high-quality materials ensure optimum electrical contact.

Technical Data

Explosion Protection	
Area of application	European Union (ATEX) IECEX China (CQST)
Area of application Note	Other country markings available on request
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 06.0020
IECEX gas explosion protection	Ex db eb IIC T6 ... T5 Gb
IECEX dust certificate	IECEX PTB 06.0020
IECEX dust explosion protection	Ex tb IIIC T60 °C / T75 °C Db
ATEX gas certificate	PTB 01 ATEX 1150
ATEX gas explosion protection	Ex II 2 G Ex db eb IIC T6 ... T5 Gb
ATEX dust certificate	PTB 01 ATEX 1150
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC T60 °C / T75 °C Db
Certificates	ATEX (PTB), Brazil (ULB), IECEX (PTB), Korea (KGS), Taiwan (ITRI)
Declaration of conformity	ATEX (EGK), China (CCC)
Electrical Data	
Type of voltage	Low voltage
AC rated operational voltage	200/346 ... 240/415 V AC
Rated operational current	63 A
Rated operational current	max. 63 A
Mechanical service life	> 1x10 ³ mating cycles
Frequency range	50 / 60 Hz
Ambient Conditions	
Ambient temperature	-45 °C to +55 °C
Ambient temperature	-49 °F to +131 °F
Mechanical Data	
Degree of protection IP (IEC 60529)	IP66

8579/12-506 Art. No. 270910

Mechanical Data

IP degree of protection (IEC 60079)	IP66
Enclosure material	Polyamide
Silicone-free	No
Finely stranded connection cross-section	1 x 2.5 mm² ... 1 x 16 mm²
Finely stranded connection cross-section AWG	1 x AWG 14 ... 1 x AWG 6
Detailed number of poles	3 P + N + PE
Width	113 mm
Width, inches	4.45 in
Height	113 mm
Height in inches	4.45 in
Length	264 mm
Length in inches	10.39 in
Impact strength (IEC 60079)	7 J
Impact strength (IEC 62262)	IK10
Colour code	Red
Coding (clock hour position)	6
Series	SolConeX
Weight	940 g
Weight	2.07 lb


Mounting / Installation

Connection	Screw terminal
------------	----------------

Components


Cable diameter	24 – 36 mm
Cable diameter inch	0.94 – 1.42 in

Technical Drawings – Subject to Alterations



Position of clock hour position
Example: 6 h position

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

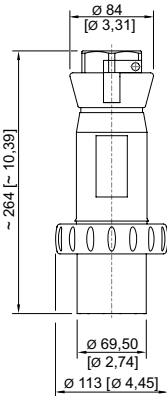


Installation equipment
63 A plug



8579/12-506 Art. No. 270910

Accessories

Protective cap for Series 8579 plug		Art. No.
	4/5-pole	153261

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.