



- Sixteen channels can be used in pairs as inputs or outputs
- Inputs/outputs Ex ec with line fault monitoring and LED error and status indication for each channel
- Module in Zone 2, Cl. I, Div. 2 can be hot swapped

06 b

## MY R. STAHL 9471B



The 9471/35 series digital input/output module for Zone 2, Cl. I, Div. 2 has 16 channels, which can be used in pairs for operation as inputs for contacts, NAMUR proximity sensors (EN 60947-5-6) and PNP proximity switches or as outputs for indicator lamps and low-power solenoid valves. Eight inputs can be used for frequencies of up to 20 kHz, and four can be used for detecting the direction of rotation. All inputs/outputs are short-circuit proof and galvanically separated from the system.

	NEC® 500 CE Code Appendix J					
	Class I		Class II		Class III	
Division	1	2	1	2	1	2
Ex interface		•				
Installation in		•				

	CE Code Section 18					
	NEC® 505			NEC® 506		
	Class I					
Zone	0	1	2	20	21	22
Ex interface			•			
Installation in			•			

	IECEX / ATEX					
	0		1		2	
Zone	0	1	2	20	21	22
Ex interface			•			
Installation in			•			


Selection Table				
Installation	Zone 2, Cl. I, Div. 2 and safe area			
Number of channels	Product Type		Art. No.	Weight
(adjustable parameters in pairs) 16 Ex ec inputs/outputs	9471/35-16-11		230225 ▲	275 g

Please order two terminals separately – see accessories and spare parts


Technical Data	
Explosion Protection	
FMus certificate	FM17US0332X
cFM certificate	FM16CA0134X
Marking cFMus	NI, Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, AEx/Ex ec ic Group IIC T4 Gc Ta = -40°C ... +75°C See Doc. 9471 6 031 001 1
IECEX gas explosion protection	Ex ec ic [ia Ga] IIC T4 Gc
Certificates	ATEX (DEK), Canada (FM), China (NEPSI), IECEX (DEK), India (PESO), Korea (KTL), USA (FM)
Ship approval	ABS, BVIS, EU RO MR (DNV), KR, LR
Electrical Data	
Max. number of 3-conductor PNP inputs	16 (channels 0 ... 15)
Auxiliary Power	
Current consumption	90 mA
Max. power consumption	2.2 W

Technical Data	
Auxiliary Power	
Max. power dissipation	0.7 W
Input	
Max. number of frequency inputs	8 (channel 8 to 15)
Notes	Max. supply voltage PNP: 24 V externally supplied  IEC 60947-5-6-1999 (NAMUR), 3-conductor PNP proximity switches and active 24 V signals with and without 47 kΩ resistance connected in parallel
Output	
Signal type binary output	2-conductor (6 V/2 mA)
Notes	Output characteristics, see data sheet online at r-stahl.com (MY R. STAHL 9471B)
Ambient Conditions	
Ambient temperature °F	-40°F ... +167°F
Ambient temperature °C	-40°C ... +75°C
Mechanical Data	
Degree of protection (IP) (IEC 60529)	IP20

### Technical Drawings – Subject to Alterations

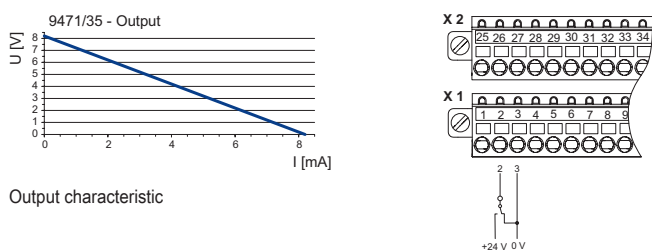

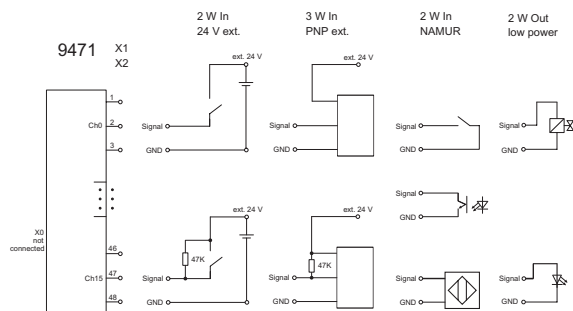




Output characteristic



9471/35 connection diagram

### Accessories

Figure	Description	Art. No.	Weight
<b>Pluggable terminal</b>			
	1.5 mm <sup>2</sup> with lock, 24-pin, spring clamp connection, black, for connecting the field signals to I/O modules, for non-intrinsically safe field circuits Version: Only for 9469, 9471 and 9472 I/O modules Labelling: 1 to 24	245090 ▲	20 g
	1.5 mm <sup>2</sup> with lock, 24-pin, spring clamp connection, black, for connecting the field signals to I/O modules, for non-intrinsically safe field circuits Version: Only for 9469, 9471 and 9472 I/O modules Labelling: 25 to 48	245091 ▲	20 g

Accessories			
Figure	Description	Art. No.	Weight
<b>Resistor error message suppression</b>			
	The resistors are used to suppress error messages for unused I/O channels Resistance value: 5K6/0.5 W Suitable for: AIM 9468; UMH 9469; DIOM 9470; DIOM 9471; DIOM 9472; DOM 9475 For intrinsically safe circuits (simple apparatus according to EN 60079-11)	244911	-
<b>Partition</b>			
	For mounting between intrinsically safe and non-intrinsically safe connections between I/O modules to maintain a tight string length of 50 mm	220101	10 g
<b>Warning label</b>			
	"Clean modules only with a damp cloth."	162796	1 g
<b>DIN A4 sheet</b>			
	For label plate on I/O modules; 6 plates per sheet; IS Wizard printout; packaging unit = 20 sheets	162832	1 g
<b>Labelling strips</b>			
	"FB Addr ... Mod No ..." for pluggable terminal, 26 pieces on the sheet	162788	1 g
<b>Set of screws</b>			
	Set of M5 x 14 screws (self-tapping) for 9490 vibration brackets Number of screws in a set: 25	275516	-

**Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations**

