




- A comprehensive portfolio for a wide range of solenoid valves
- Space savings due to a slim design – 12.5 mm wide
- Can be used for functional safety levels up to SIL 3 (IEC/EN 61508)

07 b

MY R. STAHL 9276A

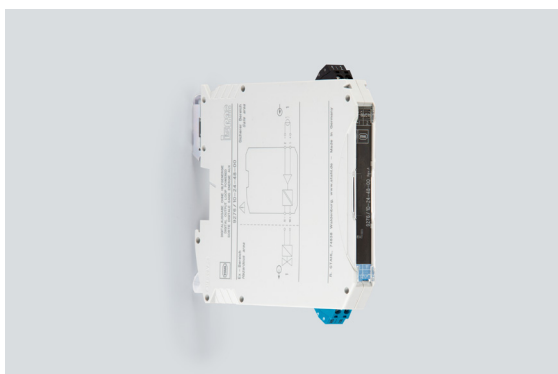

Series 9276 digital outputs issue signals for the intrinsically safe operation of Ex i solenoid valves, indicator lamps or horns. The devices do not require a separate auxiliary power supply as they are powered by the control circuit. The intrinsically safe outputs are galvanically separated from the inputs.

	NEC® 500 CE Code Appendix J					
	Class I		Class II		Class III	
Division	1	2	1	2	1	2
Ex interface	•	•	•	•	•	•
Installation in		•				

	CE Code Section 18 NEC® 505					
	Class I			NEC® 506		
Zone	0	1	2	20	21	22
Ex interface	•	•	•			
Installation in		•				

	IECEx / ATEX					
	0	1	2	20	21	22
Ex interface	•	•	•	•	•	•
Installation in		•				

Selection Table

Number of channels		1								
Max. voltage U_o/V_o	Max. current I_o (Ex ia)	Max. power P_o	Output open-circuit voltage U_a	Output internal resistance R_i	Max. output current $I_{a,max}$	Connection type	Product Type	Art. No.	Weight	
25.1 V	87 mA	550 mW	21.9 V	287 Ω	40 mA	Screw terminal	9276/10-21-40-00s	261441	0.36 lb	
							9276/10-21-40-00k	261445	0.36 lb	
	188 mA	1180 mW	21.9 V	133.4 Ω	58 mA	Screw terminal	9276/10-21-60-00s	261443	0.36 lb	
							9276/10-21-60-00k	261447	0.36 lb	
27.7 V	101 mA	697 mW	24 V	275.5 Ω	48 mA	Screw terminal	9276/10-24-48-00s	261442	0.36 lb	
							9276/10-24-48-00k	261446	0.36 lb	


Technical Data

Variant	9276/10-21-40-00, 9276/10-24-48-00	9276/10-21-60-00
Explosion Protection		
cULus certificate	E81680	E81680
Marking cULus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, IIC T4 any mounting pos. Ta = 60°C See Doc. 9276 6 031 001 3	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, IIC T4 any mounting pos. Ta = 60°C See Doc. 9276 6 031 001 3
IECEx gas explosion protection	Ex ec [ia Ga] IIC T4 Gc	Ex ec [ia IIB Ga] IIC T4 Gc
IECEx dust explosion protection	[Ex ia Da] IIC	[Ex ia Da] IIC



Technical Data

Variant	9276/10-21-40-00, 9276/10-24-48-00	9276/10-21-60-00
Explosion Protection		
Certificates	ATEX (IBE), Canada (UL), China (CQM), IECEx (IBE), Korea (KTL), SIL (exida), USA (UL)	ATEX (IBE), Canada (UL), China (CQM), IECEx (IBE), SIL (exida), USA (UL)
Ship approval	DNV	DNV
Safety Data		
Safety-related max. voltage	253 V AC	253 V AC
Functional Safety		
SIL	3	3
Auxiliary Power		
Auxiliary power	without	without
Input		
Input voltage for ON	15 – 30 V	15 – 30 V
Input voltage for OFF	0 – 5 V	0 – 5 V
Output		
Switching delay ON/OFF	≤ 20 ms	≤ 20 ms
Ambient Conditions		
Ambient temperature °F	-40 °F ... +140 °F	-40 °F ... +140 °F
Ambient temperature °C	-40 °C ... +60 °C	-40 °C ... +60 °C
Storage temperature °F	-40 °F ... +176 °F	-40 °F ... +176 °F
Storage temperature °C	-40 °C ... +80 °C	-40 °C ... +80 °C
Mounting / Installation		
Mounting type	DIN rail NS35/15, NS35/7.5	DIN rail NS35/15, NS35/7.5

Technical Drawings – Subject to Alterations

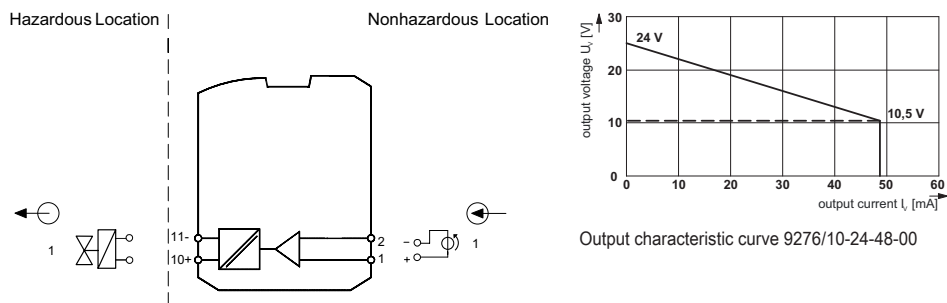


Connection diagram 9276/10

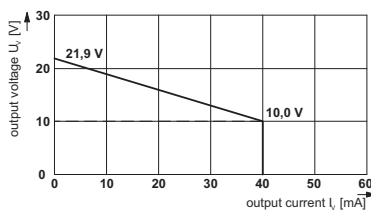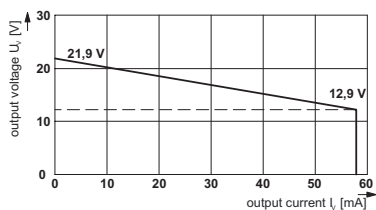


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

07 b

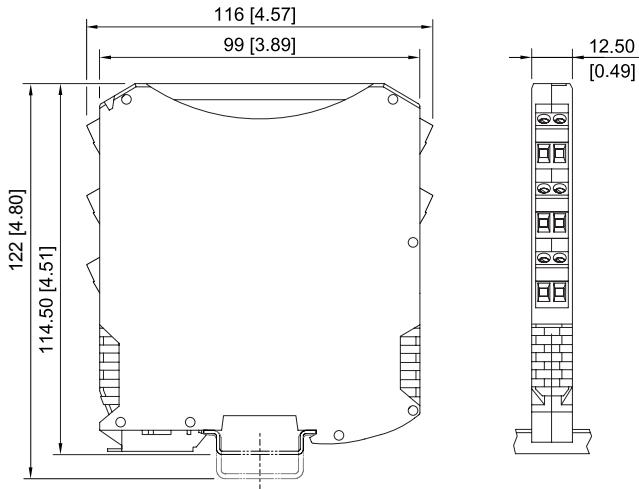

ISpac Series 9260, 9270, 9275, 9276 with spring clamp terminal

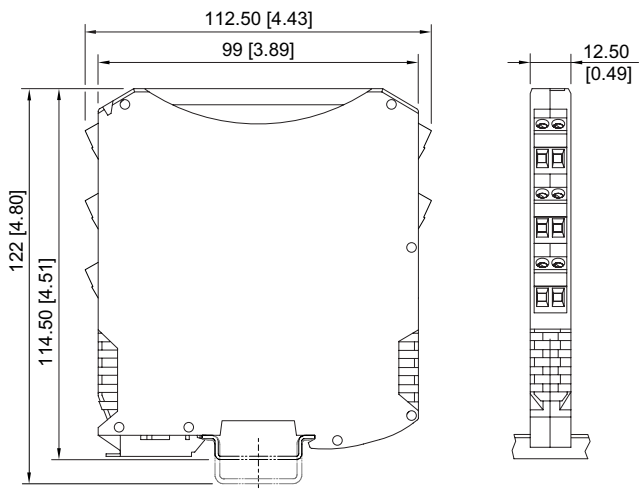

ISpac Series 9260, 9265, 9270, 9275, 9276, 9282 with screw terminal