

Zener Barriers

Dual-channel safety barrier



9002/13-199-225-001 Art. No. 158921



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, zero-potential contacts and many more
- Compact, space-saving devices that are easy to install on a DIN rail
- Quick and efficient installation as barriers can be simultaneously snapped onto DIN rail and connected to ground (ISA - RP12.06)

MY R. STAHL 9002A



The 9002 series INTRINSPAK two-channel zener barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of zener barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardized for all variants.

Technical Data

Explosion Protection

Application range (Zones)	2
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX PTB 08.0057X
IECEX gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX PTB 08.0057X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	PTB 01 ATEX 2053 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	PTB 01 ATEX 2053 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
FMus certificate	3010778
Marking FMus	NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4, Class I, Zone 2, Group IIC T4 IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, Groups IIC/IIB Hazardous location when inst. per doc. 90 026 11 31 1
Certificate ULus	E81680V1S3
Marking ULus	For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4 Providing IS circuits for Class I,II,III, GROUPS A,B,C,D,E,F,G; per doc. 90 026 11 31 3
cCSA certificate	1284580

9002/13-199-225-001 Art. No. 158921

Explosion Protection

Marking cCSA	Associated equipment [Ex ia], Class I, Div. 2, Groups A,B,C,D; Provides IS circuits for Class I,II,III, Class I, Zone 0, Groups IIC/IIB For applicable grps per inst. doc. 90 016 11 31 2
Inmetro gas certificate	UL-BR 12.0354
Inmetro dust certificate	UL-BR 12.0354
Certificates	ATEX (PTB), Brazil (ULB), Canada (CSA), China (CQST), IECEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	in Zone 2, Division 2 and in safe area
Further information	see respective certificate and operating instructions

Safety Data

Max. voltage U_o/V_{oc}	19.9 V			
Max. current I_o/I_{sc}	222 mA			
Max. power P_o	1100 mW			
Max. permissible external capacitance C_o/C_a for IIC	0.223 μ F			
Max. permissible external capacitance C_o/C_a for IIB	1.42 μ F			
Max. permissible external inductance L_o/L_a for IIC	0.39 mH			
Max. permissible external inductance L_o/L_a for IIB	3.18 mH			
Intrinsically safe limiting values Inductance L_o /capacitance C_o	Jointly connectable inductance L_o /capacitance C_o			
Channel 1	IIC	L_o [mH]	0.2 mH	0.100 mH
		C_o [μ F]	1.4000 μ F	1.8000 μ F
	IIB	L_o [mH]	1 mH	0.1 mH
		C_o [μ F]	0.79 μ F	1.20 μ F
Channel 2	IIC	L_o [mH]	10 mH	1 mH
		C_o [μ F]	0.170 μ F	0.170 μ F
	IIB	L_o [mH]	10 mH	1 mH
		C_o [μ F]	0.83 μ F	0.99 μ F
Channels 1 + 2	IIC	L_o [mH]	0.2 mH	0.10 mH
		C_o [μ F]	0.140 μ F	0.180 μ F
	IIB	L_o [mH]	2 mH	1 mH
		C_o [μ F]	0.790 μ F	0.79 μ F

Electrical Data

Number of channels	2
Maximum resistance R_{max}	109 Ω
Min. resistance R_{min}	96 Ω
Maximum output current I_{max}	148 mA
Potential channel 1	Positive
Potential channel 2	Positive with diode
Transmission frequency channel 1	\leq 100 kHz
Channel 2 auxiliary voltage drop	2 V

Zener Barriers

Dual-channel safety barrier



9002/13-199-225-001 Art. No. 158921

Electrical Data

Type of voltage	DC						
I_{leak} leakage current for U_n	$\leq 2 \mu A$						
Channel 2 I_{leak} leakage current for	$\leq 10 \mu A$						
Chan- nel	V_{nom}	I_{max}	R_{min}	R_{max}	U_o/V_{oc}	I_o/I_{sc}	P_o
1	16.00 V DC	148 mA	96 Ω	109 Ω	19.90 V	222 mA	1100 mW
2	16 V				19.90 V	3 mA	15 mW
1 + 2					19.90 V	225 mA	1120 mW

Auxiliary Power

Power supply	Controlled
--------------	------------

Ambient Conditions

Ambient temperature °C	-20 °C ... 60 °C
Ambient temperature °F	-4°F ... +140°F
Storage temperature °C	-20 °C ... 75 °C
Storage temperature °F	-4°F ... +167°F
Max. relative humidity	95% average, no condensation
Temperature influence	$\leq 0,25 \%/10K$

Mechanical Data


Degree of protection (IP)	IP40
Degree of protection (IP) terminals	IP20
Enclosure material	Polyamide 6GF
Number of connection terminals	4
Connection cross-section max.	1.5 mm ²
Connection cross-section AWG	16 AWG
Type of connection cable	Finely stranded Solid
Width	103 mm
Width, inches	4.09 in
Length	12 mm
Length, inches	0.48 in
Depth of cut-out	72 mm
Mounting depth, inches	2.76 in
Weight	110 g
Weight	0.24 lb

Mounting / Installation


Earthing connection cross-section	4 mm ²
Earthing conductor cross-section AWG	12 AWG
Connection type	2 PA
Min. torque, Nm	0.5 Nm
Min. torque, lb/in	4.43 lb/in
Max. torque, Nm	0.6 Nm
Max. torque, lb/in	5.31 lb/in

9002/13-199-225-001 Art. No. 158921

Technical Drawings – Subject to Alterations



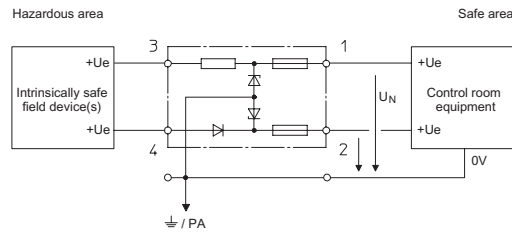


Dual-channel safety barriers, safety barrier potential:
+ / evaluation barrier potential: +

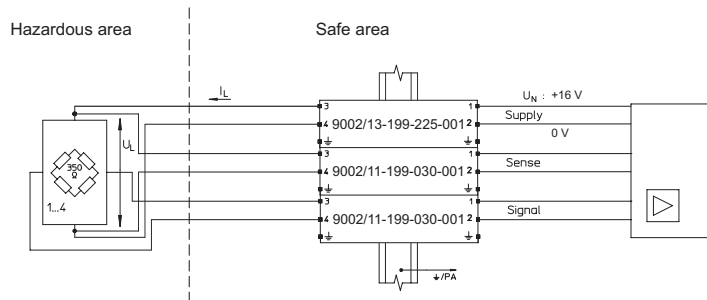


Application: Load cell (DMS) 350 Ω or 700 Ω
6-wire + 16 V field circuit unearthed

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations




Mounting on DIN rail NS 32 by means of adaptor and mounting attachment, moulded plastic



Mounting on mounting plate by means of adaptor

Accessories

Adaptor




Adaptor allows installation of a zener barrier Series 900x on a mounting plate of a previous series.

Art. No.

158826

Clamping base, moulded material




Enables mounting of zener barrier on a G-rail.

Art. No.

165283

Protective conductor terminal



USLKG 5 (wire range AWG 12 / 4 mm²)
Terminal enables connection of protective conductors to DIN rail. Color green-yellow.

Art. No.

112760

Zener Barriers


Dual-channel safety barrier



9002/13-199-225-001 Art. No. 158921

Ground terminal

Art. No.



USLKG 6 N (wire range AWG 10 / 6 mm²)
Terminal enables connection of protective /Ground conductors to DIN rail. Color green-yellow.

112599

Fuse holder

Art. No.




Fuse holder is snapped onto the side of the zener barrier and can be equipped with up to 5 back-up fuses (replacement).

158834




Insulation and fastening material

Art. No.



Suitable for the NS 35/15 DIN rail, makes it possible to install the DIN rail such that it is electrically insulated from the mounting plate.


158828



Spare Parts

Back-up fuse

Art. No.



For all zener barriers Series 9001, 9002 and 9004
unit: 5 pcs.

158964

Label carrier

Art. No.



Transparent cover for the label

158977



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.