




- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, zero-potential contacts and many more
- Compact, space-saving devices that are easy to install on a DIN rail
- Quick and efficient installation as barriers can be simultaneously snapped onto DIN rail and connected to ground (ISA - RPI12.06)

### MY R. STAHL 9002A

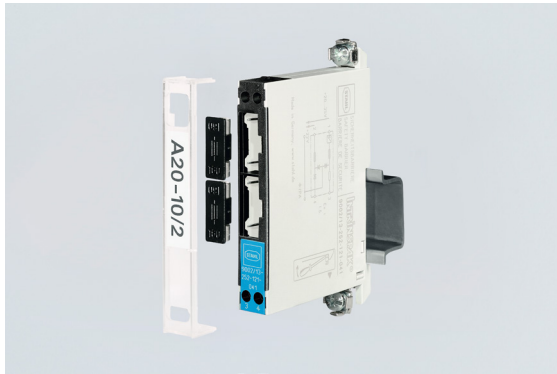

The 9002 series INTRINSIPAK two-channel zener barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of zener barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardized for all variants.

### Technical Data

| Explosion Protection             |                                                                                                                                                                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application range (zones)        | 2                                                                                                                                                                                                                                                       |
| Ex interface zone                | 0, 1, 2, 20, 21, 22                                                                                                                                                                                                                                     |
| IECEEx gas certificate           | IECEEx PTB 08.0057X                                                                                                                                                                                                                                     |
| IECEEx gas explosion protection  | Ex ec [ia Ga] IIC T4 Gc                                                                                                                                                                                                                                 |
| IECEEx dust certificate          | IECEEx PTB 08.0057X                                                                                                                                                                                                                                     |
| IECEEx dust explosion protection | [Ex ia Da] IIIC                                                                                                                                                                                                                                         |
| ATEX gas certificate             | PTB 01 ATEX 2053 X                                                                                                                                                                                                                                      |
| ATEX gas explosion protection    | II 3 (1) G Ex ec [ia Ga] IIC T4 Gc                                                                                                                                                                                                                      |
| ATEX dust certificate            | PTB 01 ATEX 2053 X                                                                                                                                                                                                                                      |
| ATEX dust explosion protection   | II (1) D [Ex ia Da] IIIC                                                                                                                                                                                                                                |
| FMus certificate                 | 3010778                                                                                                                                                                                                                                                 |
| Marking FMus                     | NONINCENDIVE FOR, Class I, Div. 2, Groups A,B,C,D; T4;<br>Class I, Zone 2, Group IIC T4<br>IS connections for Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G;<br>Class I, Zone 0, Groups IIC/IIB<br>Hazardous location when inst. per doc. 90 026 11 31 1 |
| Certificate ULus                 | E81680V1S3                                                                                                                                                                                                                                              |
| Marking ULus                     | For use in Hazardous location, Class I, Div. 2, Groups A,B,C,D; T4<br>Providing IS circuits for<br>Class I,II,III, GROUPS A,B,C,D,E,F,G;<br>per doc. 90 026 11 31 3                                                                                     |
| Inmetro gas certificate          | UL-BR 12.0354                                                                                                                                                                                                                                           |
| Inmetro dust certificate         | UL-BR 12.0354                                                                                                                                                                                                                                           |
| Certificates                     | ATEX (PTB), Brazil (ULB), Canada (FM), IECEEx (PTB), India (PESO), Japan (CML), Korea (KGS), USA (FM), USA (UL)                                                                                                                                         |
| Declaration of conformity        | ATEX (EUK)                                                                                                                                                                                                                                              |
| Installation                     | in Zone 2, Division 2 and in safe area                                                                                                                                                                                                                  |
| Further information              | see respective certificate and operating instructions                                                                                                                                                                                                   |

9002/11-130-360-001 Art. No. 158958

## Safety Data

|                                                                        |     |                  |                                                         |                |                |
|------------------------------------------------------------------------|-----|------------------|---------------------------------------------------------|----------------|----------------|
| Max. voltage $U_o/V_{oc}$                                              |     |                  | 13 V                                                    |                |                |
| Max. current $I_o/I_{sc}$                                              |     |                  | 321 mA                                                  |                |                |
| Max. power $P_o$                                                       |     |                  | 1040 mW                                                 |                |                |
| Max. permissible external capacitance $C_o/C_s$ for IIC                |     |                  | 1 $\mu$ F                                               |                |                |
| Max. permissible external inductance $L_o/L_a$ for IIC                 |     |                  | 0.19 mH                                                 |                |                |
| Max. permissible external capacitance $C_o/C_s$ for IIB                |     |                  | 6 $\mu$ F                                               |                |                |
| Max. permissible external inductance $L_o/L_a$ for IIB                 |     |                  | 1.6 mH                                                  |                |                |
| Intrinsically safe limiting values Inductance $L_o$ /capacitance $C_o$ |     |                  | Jointly connectable inductance $L_o$ /capacitance $C_o$ |                |                |
| Channel 1                                                              | IIC | $L_o$ [mH]       |                                                         | 0.2 mH         | 0.100 mH       |
|                                                                        |     | $C_o$ [ $\mu$ F] |                                                         | 0.6400 $\mu$ F | 0.8300 $\mu$ F |
|                                                                        | IIB | $L_o$ [mH]       |                                                         | 1 mH           | 0.1 mH         |
|                                                                        |     | $C_o$ [ $\mu$ F] |                                                         | 2.30 $\mu$ F   | 5.40 $\mu$ F   |
| Channel 2                                                              | IIC | $L_o$ [mH]       | 20 mH                                                   | 1 mH           | 0.1 mH         |
|                                                                        |     | $C_o$ [ $\mu$ F] | 15 $\mu$ F                                              | 36 $\mu$ F     | 75 $\mu$ F     |
|                                                                        | IIB | $L_o$ [mH]       | 50 mH                                                   | 1 mH           | 0.1 mH         |
|                                                                        |     | $C_o$ [ $\mu$ F] | 78 $\mu$ F                                              | 210 $\mu$ F    | 640 $\mu$ F    |
| Channels 1 + 2                                                         | IIC | $L_o$ [mH]       |                                                         | 0.2 mH         | 0.10 mH        |
|                                                                        |     | $C_o$ [ $\mu$ F] |                                                         | 0.620 $\mu$ F  | 0.820 $\mu$ F  |
|                                                                        | IIB | $L_o$ [mH]       |                                                         | 1 mH           | 0.1 mH         |
|                                                                        |     | $C_o$ [ $\mu$ F] |                                                         | 2.20 $\mu$ F   | 5.300 $\mu$ F  |

## Electrical Data

|                                      |  |                   |  |  |  |  |  |
|--------------------------------------|--|-------------------|--|--|--|--|--|
| Number of channels                   |  | 2                 |  |  |  |  |  |
| Type of voltage                      |  | DC                |  |  |  |  |  |
| Maximum resistance $R_{max}$         |  | 52 $\Omega$       |  |  |  |  |  |
| Min. resistance $R_{min}$            |  | 46 $\Omega$       |  |  |  |  |  |
| Maximum output current $I_{max}$     |  | 192 mA            |  |  |  |  |  |
| Potential channel 1                  |  | Positive          |  |  |  |  |  |
| Potential channel 2                  |  | Positive          |  |  |  |  |  |
| Transmission frequency channel 1     |  | $\leq 100$ kHz    |  |  |  |  |  |
| $I_{leak}$ leakage current for $U_n$ |  | $\leq 10$ $\mu$ A |  |  |  |  |  |

| Chan-<br>nel | $V_{nom}$ | $I_{max}$ | $R_{min}$   | $R_{max}$   | $U_o/V_{oc}$ | $I_o/I_{sc}$ | $P_o$   |
|--------------|-----------|-----------|-------------|-------------|--------------|--------------|---------|
| 1            | 10.00 V   | 192 mA    | 46 $\Omega$ | 52 $\Omega$ | 13 V         | 321 mA       | 1040 mW |
| 2            | 1 V       | 19 mA     | 46 $\Omega$ | 52 $\Omega$ | 1.60 V       | 39 mA        | 16 mW   |
| 1 + 2        |           |           |             |             | 13 V         | 360 mA       | 1060 mW |

## Auxiliary Power

|              |            |
|--------------|------------|
| Power supply | Controlled |
|--------------|------------|

## Output

|                       |                   |
|-----------------------|-------------------|
| Temperature influence | $\leq 0,25$ %/10K |
|-----------------------|-------------------|

## Ambient Conditions

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Ambient temperature $^{\circ}$ C | -20 $^{\circ}$ C ... +60 $^{\circ}$ C |
|----------------------------------|---------------------------------------|

# Zener Barriers

## Two-channel safety barrier

STAHL

9002/11-130-360-001 Art. No. 158958

### Ambient Conditions

|                        |                              |
|------------------------|------------------------------|
| Ambient temperature °F | -4°F ... +140°F              |
| Storage temperature °C | -20 °C ... +75 °C            |
| Storage temperature °F | -4°F ... +167°F              |
| Max. relative humidity | 95% average, no condensation |


### Mechanical Data

|                                     |                          |
|-------------------------------------|--------------------------|
| Degree of protection (IP)           | IP40                     |
| Degree of protection (IP) terminals | IP20                     |
| Enclosure material                  | Polyamide 6GF            |
| Number of connection terminals      | 4                        |
| Connection cross-section max.       | 1.5 mm <sup>2</sup>      |
| Connection cross-section AWG        | 16 AWG                   |
| Type of connection cable            | Solid<br>Finely stranded |
| Width                               | 103 mm                   |
| Width, inches                       | 4.09 in                  |
| Length                              | 12 mm                    |
| Length in inches                    | 0.48 in                  |
| Mounting depth                      | 72 mm                    |
| Mounting depth in inches            | 2.76 in                  |
| Weight                              | 110 g                    |
| Weight                              | 0.24 lb                  |

### Mounting / Installation

|                                      |                   |
|--------------------------------------|-------------------|
| Earthing connection cross-section    | 4 mm <sup>2</sup> |
| Earthing conductor cross-section AWG | 12 AWG            |
| Connection type                      | 2 PA              |
| Min. torque, Nm                      | 0.5 N · m         |
| Min. torque, lb/in                   | 4.43 lb/in        |
| Max. torque, Nm                      | 0.6 N · m         |
| Max. torque, lb/in                   | 5.31 lb/in        |

### Technical Drawings – Subject to Alterations

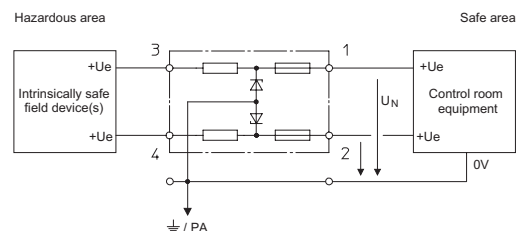

Dual-channel safety barriers, potential: + / +



### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

# Zener Barriers


## Two-channel safety barrier

STAHL


9002/11-130-360-001 Art. No. 158958



Mounting on DIN rail NS 35/15



Mounting on DIN rail NS 32 by means of adaptor and mounting attachment, moulded plastic



Mounting on mounting plate by means of adaptor

## Accessories

### Terminal block




Phoenix Contact terminal block UT 4-PE  
Phoenix Contact terminal block UT 6-PE

### Art. No.

113057  
113058

### Adaptor




The adaptor enables a zener barrier to be installed on a clamping base (Art. No. 165283) or mounting plate from a previous series.

### Art. No.

158826

### Clamping base, moulded material




Enables mounting of zener barrier on a G-rail. The safety barrier is mounted using the adaptor (Art. No. 158826).

### Art. No.

165283

### Fuse holder



Fuse holder is snapped onto the side of the zener barrier and can be equipped with up to 5 back-up fuses (replacement).

### Art. No.

158834

## Spare Parts

### Back-up fuse




For all zener barriers Series 9001, 9002 and 9004  
unit: 5 pcs.

### Art. No.

158964

9002/11-130-360-001    Art. No. 158958

| Label carrier                                                                    |  | Art. No. |
|----------------------------------------------------------------------------------|--|----------|
|  |  | 158977   |

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.