

Isolator Barriers

Isolating repeater Without auxiliary power

Ex i field circuit ISpac

9167/23-11-00s Art. No. 160247



- Loop-powered Ex i output isolating repeater
- Suitable for fire and gas detectors
- Suitable for loads of up to 800 Ω

MY R. STAHL 9167A



9167 series Ex i isolating repeaters operate without auxiliary power and can be used for the intrinsically safe operation of control valves, I/P transducers, analogue indicators and fire or gas detectors, for example. They have one or two channels. They transmit superimposed HART communication signals in both directions.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEx gas certificate	IECEx BVS 11.0089 X
IECEx gas explosion protection	Ex nA [ia Ga] IIC T4 Gc
IECEx dust certificate	IECEx BVS 11.0089 X
IECEx dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	BVS 04 ATEX E 082 X
ATEX gas explosion protection	II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
ATEX dust certificate	BVS 04 ATEX E 082 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [AEx/Ex ia] IIC T4 at Ta = 70°C See Doc. 91 676 01 31 1
Certificate ULus	E81680V1S7
Marking ULus	providing intrinsically safe circuits for use in Class I,II,III, GROUPS A,B,C,D,E,F,G; See Doc. 91 676 01 31 3
Certificates	ATEX (BVS), Canada (FM), IECEx (BVS), SIL (exida), USA (FM), USA (UL)
Ship approval	CCS, EU RO MR (DNV)
Declaration of conformity	ATEX (EUK)
Installation	In Zone 2, Division 2 and safe areas
Further information	See relevant certificate and operating instructions

Isolator Barriers

STAHL

Isolating repeater Without auxiliary power

Ex i field circuit ISpac

9167/23-11-00s Art. No. 160247

Safety Data

Max. voltage U_o/V_{oc}	25 V
Max. current I_o/I_{sc}	99 mA
Max. power P_o	613 mW
Max. permissible external capacitance C_o/C_a for IIC	0.11 μ F
Max. permissible external inductance L_o/L_a for IIC	2.5 mH
Max. permissible external capacitance C_o/C_a for IIB	0.84 μ F
Max. permissible external inductance L_o/L_a for IIB	11 mH
Max. perm. ext. capacit. IIIC	0.84 μ F
Max. permis. ext. induct. IIIC	11 mH
Internal capacitance	Negligible
Internal inductance	Negligible
Safety-related max. voltage	253 V

Functional Safety

PFD _{avg} at T _{proof} 3 years	4,34E-04
Further information	See test report

Electrical Data

Number of channels	2
LFD relay	No
Communication signal	HART

Auxiliary Power

Auxiliary power	without
Nominal voltage V_{nom}	Loop-powered
Auxiliary power voltage range	Loop-powered
Max. power dissipation at 20 mA	0.4 W
Max. power dissipation at 40 mA	1.2 W
Polarity reversal protection	Yes

Galvanic Isolation

Test voltage as per standard	EN IEC 60079-11
Ex i output to input	1.5 kV AC
Ex i output to Ex i output	350 V AC
Test voltage as per standard	EN 50178
Input to input	500 V AC

Input

Input	0/4 ... 20 mA with HART
Input signal	0/4 to 20 mA with HART
Function range input	0 – 40 mA
Input voltage U_E	≤ 31.2 V
Max. effective voltage	23.6 V
Internal resistance R_i at 20 mA	380 Ω
Internal resistance R_i at 40 mA	330 Ω
Additional voltage drop	1 V

Isolator Barriers

STAHL

Isolating repeater Without auxiliary power

Ex i field circuit ISpac

9167/23-11-00s Art. No. 160247

Input

Internal consumption	$\leq 10 \mu\text{A}$
Behaviour of the input with DB	$\leq 1 \text{ mA}$

Output

Output	0/4 to 20 mA with HART
Output signal	0/4 to 20 mA with HART
Function range output	0 – 40 mA
Output short-circuit current	$\leq 60 \text{ mA}$
Open-circuit voltage U_a	25 V
Current residual ripple	$\leq 0.5\%$
Load resistance R_L	0 ... 800 Ω
Load at 24 mA short circuit detection=OFF	Z1
Settling time 10-90%	$\leq 1 \text{ ms}$
Cross-talk channel 1 / channel 2	Not measurable
Wire break. err detection OFF	$I_A = 0 \text{ mA}$
Deviations / error note	Information in % of the measuring range (20 mA) at U_N , 23 °C
Average measurement fault	0,35%
Temperature influence error limits	$\leq 0.1\%/10 \text{ K}$

Ambient Conditions

Ambient temperature °C	-20 °C ... +70 °C (Single device) -20 °C ... +60 °C (Group assembly)
Ambient temperature °F	-4 °F ... +158 °F (Single device) -4 °F ... +140 °F (Group assembly)
Note	The installation conditions affect the ambient temperature. Observe the "Cabinet installation guide".
Storage temperature °C	-40 °C ... +80 °C
Storage temperature °F	-40 °F ... +176 °F
Max. relative humidity	95%
Use at the height of	< 2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21

Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Min. rigid conductor cross section	0.2 mm ²
Max. rigid conductor cross section	2.5 mm ²
Min. flexible conductor cross section	0.2 mm ²
Max. flexible conductor cross section	2.5 mm ²
Width	17.6 mm
Width, inches	0.69 in
Height	114.5 mm
Height in inches	4.51 in
Length	108 mm
Length in inches	4.25 in

Isolator Barriers



Isolating repeater Without auxiliary power

Ex i field circuit ISpac

9167/23-11-00s Art. No. 160247


Mechanical Data

Weight	182 g
Weight	0.4 lb


Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
Grid dimension	17.6 mm
Mounting orientation	Horizontal Vertical
Connection type	Screw terminal
Connection cross-section AWG	24 ... 14

Technical Drawings – Subject to Alterations

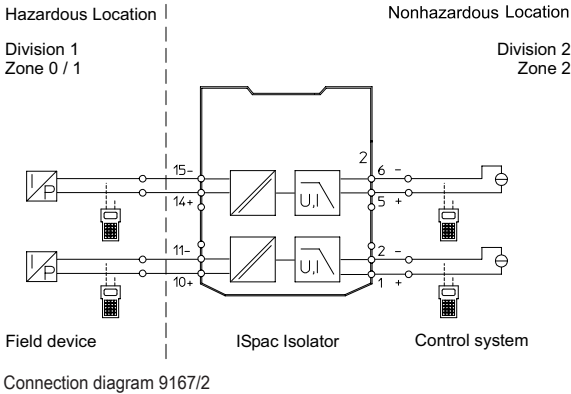

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

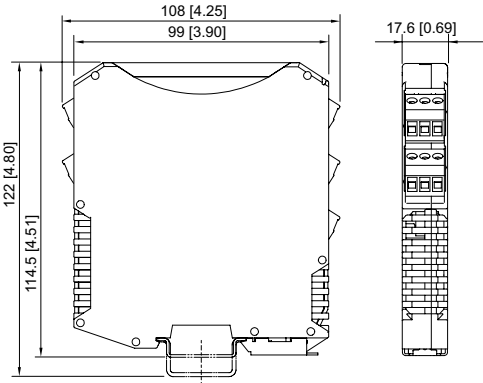

ISpac Series 9143, 9146, 9147, 9160, 9162, 9163,
9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182,
9193, ISbus Series 9412 with screw terminal

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.