

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2

9442/35-10-00 Art. No. 246854



- Support for PROFIBUS DP, PROFINET, Modbus TCP+RTU and EtherNet/IP™; incl. HART transmission and redundancy
- RS485 interfaces (max. 12 Mbit/s) and Ethernet 100BASE-TX (max. 100 Mbit/s)
- Comprehensive diagnostics based on NE 107
- Support of FDT/DTM, OPC UA and web server for integration in asset management systems
- Enhanced ambient temperature range from -40 °C to +75 °C (-40 °F to +167 °F)

MY R. STAHL 9442A



EtherNet/IP



Modbus
TCP + RTU



The 9442/35 CPU module functions as a gateway between the IS1+ Remote I/O system and the automation system. All supported communication protocols are in the CPU module and can be configured by the user. In addition to the process values, other information such as diagnostics, parameterisation and configuration is transmitted over the CPU module. Communication with the I/O modules is implemented via the 9496 socket and the 9494 BusRail. Integration in control systems and plant asset management tools is implemented using standards such as GSD, EDS, web servers, OPC UA and FDT/DTM.

Technical Data

Explosion Protection

Application range (zones)	2
Application range (Zone) note	Zone 22 is only permissible if a suitable enclosure is used!
Ex interface zone	2
IECEX gas certificate	IECEX PTB 17.0031X
IECEX gas explosion protection	Ex ec ia [ia Ga] IIC T4 Gc
ATEX gas certificate	PTB 17 ATEX 2019 X
ATEX gas explosion protection	Ex II 3 (1) G Ex ec ia [ia Ga] IIC T4 Gc
FMus certificate	FM17US0332X
cFM certificate	FM16CA0134X
Marking FMus	NI, Class I, Div. 2 Groups A,B,C,D; Class I, Zone 2 AEx ec ia [ia Ga] IIC T4 Gc Ta = -40°C ... +75°C See Doc. 9442 6 031 002 1
Marking cFM	NI, Class I, Div. 2 Groups A,B,C,D; Class I, Zone 2 Ex ec ia [ia Ga] IIC T4 Gc Ta = -40°C ... +75°C See Doc. 9442 6 031 002 1
Certificates	ATEX (PTB), Brazil (ULB), Canada (FM), China (NEPSI), IECEX (PTB), Korea (KTL), USA (FM)
Ship approval	ABS, BVIS, EU RO MR (DNV), KR, LR
Declaration of conformity	ATEX (EUK), China (CCC)
Installation	Zone 2 / Cl. I, II, Div. 2

Electrical Data

Protocol setting	Via rotary switch S1 On the 9496/35 socket
Type RS-485 connector	Sub-D connector
No. of pins RS-485 conn.	9

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2

9442/35-10-00 Art. No. 246854



Electrical Data

RS485 interface	As per PROFIBUS specification
RS-485 interface protocol	Modbus RTU Profibus DP V0 Profibus DP V1 HART
Line termination RS485	Powered resistor (end-of-line resistor in the Sub-D plug, see accessories)
Address setting RS485	Using the S2 and S3 rotary switches on the 9496/35 socket
Address range RS485	1 ... 127
Copper RS485 transmission length/rate	1200 m at 9.6 to 93.75 kbit/s 1000 m at 187.5 kbit/s 400 m at 500 kbit/s 200 m at 1.5 Mbit/s 100 m at 12 Mbit/s
Transfer length/rate FO RS485	Approx. 2000 m at 1.5 Mbit/s
Transfer length/rate FO RS485 note	With 9186 FO fieldbus isolating repeater or 9786 media converter, see accessories
Max. DC voltage U_m RS485	30 V
Ethernet interface connection	2 x RJ45 (EIA/TIA 568B) socket
USB version	USB 2.0
Interface RJ45	100BASE-TX Unmanaged switch function
RJ45 protocols	MODBUS TCP EtherNet/IP™ PROFINET
IP address setting	Using a web server or IS1+ detect software (default: 192.168.1.101)
Transfer rate RJ45	Max. 10/100 Mbit/s Auto-negotiation
Transfer length copper RJ45	100 m
Transfer length FO RJ45	2000 m multi mode 30 km single mode
Transmission distance FO RJ45 note	With media converter/9721 switch, see accessories
Max. DC voltage U_m RJ45	30 V
USB interface	Type A socket
USB address setting	Identical to RS485 address
Max. USB transfer rate	480 (unece.unit.MBI)
Max. USB current	250 mA
Max. DC voltage U_m USB	30 V
USB protocols	Service bus

Auxiliary Power

Power supply	Via socket 9496 and PM 9445/35
Max. current consumption	0.3 A
Max. power dissipation	5 W

Galvanic Isolation

Galv.sep. CPU to CPU (red.)AC	1500 V
Galv.sep. AUX PWR to CPU AC	1500 V

Device Specific Data

Redundancy	Full redundancy Line redundancy Supply redundancy
------------	---

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2

9442/35-10-00 Art. No. 246854



Device Specific Data

Software	IS1 device DTM IS Wizard Web server
Diagnostic/parameterisation functions	<ul style="list-style-type: none">- Use the web server or IS1+ detect software to set the IP address (for Ethernet)- Web server- Load or read back configuration data and parameters in IS1+ field stations- Read inputs- Read and write outputs- Transmit diagnostics data (e.g. configuration error, hardware error, signal error)- Transmit HART commands from/to HART field devices- Firmware downloads using the web server
Diagnostic/parameterisation connectable software packages	<ul style="list-style-type: none">- IS Wizard (via USB ServiceBus)- R. STAHL DTM devices with fdt frames (e.g. fdtContainer from M+M; Pactware)- AMS from Emerson Process Management- PDM from Siemens- PRM and Fieldmate from Yokogawa- FieldCare from Endress+Hauser- FDM from Honeywell
Retrievable parameters	Hardware revision Manufacturer Serial number Software revision Type
LED module requires maintenance	LED "M/S", blue
LED operating conditions	LED "PWR", green
LED data traffic automatic system	LED "AS EXCH", green
LED configuration	LED "CFG ERR", red
LED data traffic RS485	LED "RXTX X1 RS-485", green
LED port connection RJ45 port 1	LED "LINK X2 LAN P1", yellow
LED data traffic RJ45 port 1	LED "RXTX X2 LAN P1", green
LED port connection RJ45 port 2	LED "LINK X2 LAN P2", yellow
LED data traffic RJ45 port 2	LED "RXTX X2 LAN P2", green
LED USB data traffic	LED "RXTX X3 USB", green

Diagnostics

LED group error	LED "ERR", red
LED status	LED "STATUS", yellow

Ambient Conditions

Ambient temperature	-40 °C ... 65 °C (without mounting plate) -40 °C ... 70 °C (with 3 mm sheet steel mounting plate) -40 °C ... 75 °C (with 6 mm aluminium mounting plate)
Ambient temperature	-40 °F ... 149 °F (without mounting plate) -40 °F ... 158 °F (with 3 mm sheet steel mounting plate) -40 °F ... 167 °F (w. 6 mm alum. mounting plate)
Ambient temperature note	Mounting on a BusRail (DIN mounting rail) on a galvanised, sheet steel mounting plate of at least 3 mm / 0.12 inches using four additional safety screws on a coated, aluminium mounting plate of at least 6 mm / 0.24 inches using four additional safety screws (EN-AW6082 or comparable heat conductivity)

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2

9442/35-10-00 Art. No. 246854



Ambient Conditions

Storage temperature	-40 °C ... 80 °C
Storage temperature °F	-40 °F ... 176 °F
Max. operating altitude	2000 m
Max. relative humidity	95 %
max. relative humidity note	without condensation
Shock (semi-sinusoidal)	(IEC EN 60068-2-27) 15 g (3 shocks per axis and direction)
Vibration (sinusoidal)	(IEC EN 60068-2-6) Frequency range 2 ... 13.2 Hz Amplitude 1 mm (peak value) Frequency range 13.2 ... 100 Hz Acceleration amplitude 0.7 g


Mechanical Data

Degree of protection (IP) (IEC 60529)	IP30
Module enclosure	Polyamide 6GF Seawater-resistant aluminium
Fire resistance (UL 94)	V2
Pollutant class	Corresponds to G3
Width	32 mm
Width, inches	1.26 in
Depth	123 mm
Depth in inches	4.843 in
Length	152 mm
Length in inches	5.98 in
Weight	1 kg

Mounting / Installation

Mounting orientation	Horizontal Vertical
Module fuse	Torx T20 screws
Note	Only connect the 9442/35 CPU to the 9496/35 socket

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

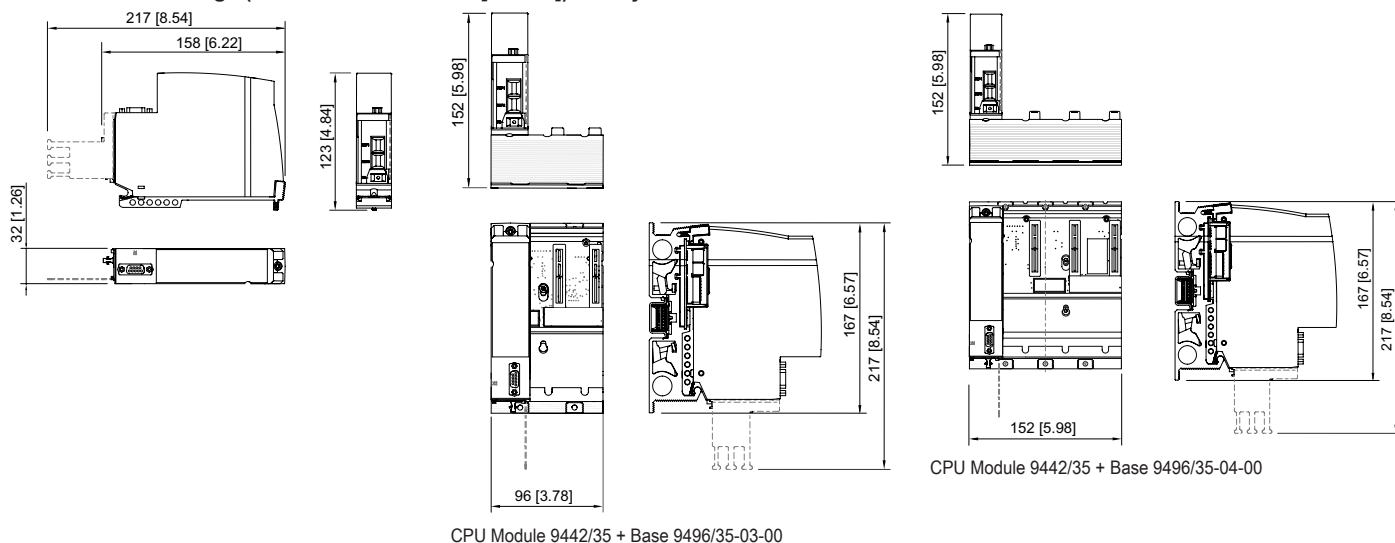

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2



9442/35-10-00 Art. No. 246854



Accessories


Series 9496/35 – socket for CPU & power modules

Art. No.

	Zone 2 / Div. 2 3 slots for mounting / installing 1 x CPU and 2 x power module or 2 x CPU und 1 x power module Dimensions: approx. L = 167 mm, W = 96 mm, H = 50.6 mm	246871
	Zone 2 / Div. 2 4 slots for mounting / installing 2 x CPU and 2 x power module Dimensions: approx. L = 167 mm, W = 152 mm, H = 50.6 mm	262392


Fieldbus Isolating Repeater Series 9185/12

Art. No.

	Equipment for installation in safe areas or Zone 2/Div. 2 For fieldbuses with RS-485 interface Suitable for PROFIBUS DP, Modbus, R. STAHL ServiceBus RS-232, RS-422, RS-485 interface with the automation system Transmission rate automatically set with PROFIBUS DP Adjustable transmission rate (1.2 kbit/s to 1.5 Mbit/s) 24 V AC/DC auxiliary power For further information, see the Series 9185/12 data sheet	227600
--	--	--------


RS485 media converter

Art. No.

	Media converter for installation in Zone 2. For fieldbuses (PROFIBUS DP, Modbus RTU) using optical intrinsically safe "Ex op is" fibre optic in Zone 1. Compatible with Series 9786 devices. Point-to-point, linear structure or optical ring. With diagnostics function including error signalling. Simple parameterisation using a rotary switch. Data rates from 9.6 kbit/s to 1.5 Mbit/s possible. For further information, see the data sheet for the Series 9786 media converter.	308563
--	--	--------


FO fieldbus isolating repeater, Zone 2/Div. 2

Art. No.

	Isolating repeater for installation in Zone 2/Div. 2 For fieldbuses using optical intrinsically safe "Ex op is" fibre optic in Zone 1/Div. 1 Point-to-point or linear structure Comprehensive diagnostics function and fault message contact Suitable for PROFIBUS DP up to 1.5 Mbit/s For further information, see the data sheet for Series 9186 FO fieldbus isolating repeaters	160625
--	---	--------


FX op is/TX SC media converter for Zone 2

Art. No.

	Media converter from 10/100 BASE-TX (1 x RJ45 port) to 100 BASE-FX "Ex op is" (1 x FO port SC); multi-mode (up to 4 km range); MY R. STAHL: 9721A	220381
--	--	--------

Media converter FX op is / TX SC for Cl. I, Div. 2 and Zone 2

Art. No.

	Media converter from 10/100 BASE-TX (1 x RJ45 port) to 100 BASE-FX "Ex op is" (1 x FO port SC); single-mode (up to 30 km range); MY R. STAHL: 9721A	220382
--	--	--------

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2

9442/35-10-00 Art. No. 246854



Unmanaged switch FX op is/TX SC for Zone 2

Art. No.



Unmanaged switch FX op is auf TX; SC plug connector
FO cable 4 multi-mode (MM), 2 RJ45, installation in Zone 2

243427

DTM IS1+ devices for PROFIBUS DP and Ethernet

Art. No.



Parameterisation and configuration of the IS1+ system
Communication with HART-capable field devices
Supports all common FDT frame applications (e.g. FieldCare, PactWare™)
Condition monitoring
Scan function for automatic topology generation
Download from r-stahl.com

IS1 DTM devices Series 9499/DTM

Art. No.



- Parameterisation and configuration of the IS1+ system
- Communication with HART-capable field devices
- Supports all common FDT frame applications (e.g. FieldCare, PactWare™)
- Condition monitoring
- Scan function for automatic topology generation
- Download from r-stahl.com

Device DTM IS1 Series 9499

Art. No.



9499/DTM-IS1-02 Com/Device/HART 30
Free-of-charge software licence for up to 30 HART devices

251237

9499/DTM-IS1-04 Com/Device/HART 300
Software licence for up to 300 HART devices

251239

9499/DTM-IS1-06 Com/Device/HART unlted.
Software licence for an unlimited number of HART devices

251240

IS1 PCS7 APL field device library

Art. No.



Easy integration of IS1+ systems into SIEMENS PCS7 (V9 SP2 ... V9.1 SP2):
- PROFIBUS DP with CPM 9440 starting with GSD 3.12; CPU 9442 starting with GSD 5.14
- PROFINET with CPU 9441 starting with GSDML-V2.3-Stahl-RIO-20140206; CPU 9442 starting with GSDML-V2.34-Stahl-RIO9442-20200427
Further information and order processing exclusively through company Siemens: www.siemens.com/mvdi

AOI tool

Art. No.



Simple integration of IS1+ systems in Rockwell ControlLogix and CompactLogix via EtherNet/IP and AOI (add-on instructions).
Note: The 9499/DTM-IS1 DTM is also required.
This can be downloaded from r-stahl.com

USB RS485 converter

Art. No.



USB RS485 converter for installation in Zone 2.
Interference-resistant, bidirectional conversion of USB data to serial RS485 data with power supply via the USB port.
Can be used for various different applications, e.g. if PCs do not have RS485 interfaces.
For further information, see the Series 9787 data sheet – MY R. STAHL 9787A

266011

Remote I/O

Remote I/O IS1+ CPU module

for Zone 2

9442/35-10-00 Art. No. 246854



Sub-D plug, RS-485

Art. No.



9-pin for connecting fieldbus or ServiceBus to CPU & power module Type 9440/15, 9185 field-busisolatingrepeater and 9786/15-12 media converter.

The end-of-line resistor is installed and switchable. For non-intrinsically safe RS-485.

Ambient temperature: -40 °C to +75 °C

105715

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.