

# Isolator Barriers

Loop-powered binary output

Ex i field circuit

9276/10-21-60-00s Art. No. 261443



- A comprehensive portfolio for a wide range of solenoid valves
- Space savings due to a slim design – 12.5 mm wide
- Can be used for functional safety levels up to SIL 3 (IEC/EN 61508)

MY R. STAHL 9276A



Series 9276 digital outputs issue signals for the intrinsically safe operation of Ex i solenoid valves, indicator lamps or horns. The devices do not require a separate auxiliary power supply as they are powered by the control circuit. The intrinsically safe outputs are galvanically separated from the inputs.

## Technical Data

Explosion Protection	
Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX IBE 17.0045X
IECEX gas certificate	IECEX IBE 17.0045X
IECEX gas explosion protection	Ex nA [ia IIB Ga] IIC T4 Gc
IECEX dust certificate	IECEX IBE 17.0045X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	IBExU 17 ATEX 1153 X
ATEX gas certificate	IBExU 17 ATEX 1153 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex nA [ia IIB Ga] IIC T4 Gc
ATEX dust certificate	IBExU 17 ATEX 1153 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
cULus certificate	E81680
Marking cULus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, AEx/Ex nA Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [AEx ia]/[Ex ia] IIC T4 any mounting pos. Ta = 60°C See Doc. 9276 6 031 001 3
Certificates	ATEX (IBE), Canada (UL), China (CQM), IECEX (IBE), SIL (exida), USA (UL)
Ship approval	DNV
Declaration of Conformity	ATEX (EUK), China (CCC)
Safety Data	
Max. voltage $U_o/V_{oc}$	25.1 V
Max. current $I_o$ (Ex ia)	188 mA
Max. power $P_o$	1180 mW

# Isolator Barriers

Loop-powered binary output

Ex i field circuit

9276/10-21-60-00s Art. No. 261443



## Safety Data

Max. permissible external capacitance $C_j/C_a$ for IIB	0.83 $\mu$ F					
Max. permissible external inductance $L_j/L_a$ for IIB	4 mH					
Max. permissible external capa.IIA	2.93 $\mu$ F					
Max. permissible external inductance $L_o$ for IIA	7.5 mH					
Max. permissible external capacity $C_o$ for IIIC	0.83 $\mu$ F					
Max. permissible external inductance $L_o$ for IIIC	4 mH					
Max. permissible external capacity $C_o$ for I	2.93 $\mu$ F					
Max. permissible external inductance $L_o$ for I	7.5 mH					
Internal capacitance	Negligible					
Internal inductance	Negligible					
Safety-related max. voltage	253 V AC					
Intrinsically safe limiting values inductance $L_j$ /capacitance $C_o$	Jointly connectable inductance $L_j$ /capacitance $C_o$					
IIC	$L_o$ [mH] $C_o$ [ $\mu$ F]					
IIB	$L_o$ [mH] $C_o$ [ $\mu$ F]	2 mH 0.300 $\mu$ F	1 mH 0.370 $\mu$ F	0.500 mH 0.460 $\mu$ F	0.100 mH 0.790 $\mu$ F	
IIA	$L_o$ [mH] $C_o$ [ $\mu$ F]	5 mH 0.510 $\mu$ F	1 mH 0.560 $\mu$ F	0.500 mH 0.660 $\mu$ F	0.100 mH 1 $\mu$ F	
IIIC	$L_o$ [mH] $C_o$ [ $\mu$ F]	2 mH 0.300 $\mu$ F	1 mH 0.370 $\mu$ F	0.500 mH 0.460 $\mu$ F	0.100 mH 0.790 $\mu$ F	
I	$L_o$ [mH] $C_o$ [ $\mu$ F]	5 mH 0.510 $\mu$ F	1 mH 0.560 $\mu$ F	0.500 mH 0.660 $\mu$ F	0.100 mH 1 $\mu$ F	

## Functional Safety

SIL	3
HFT	0
SFF	100%
Lambda SD	0 FIT
Lambda SU	50 FIT
Lambda DD	0 FIT
Lambda DU	0 FIT

## Electrical Data

Number of channels	1
--------------------	---

## Auxiliary Power

Auxiliary power	without
Max. power dissipation	1.33 W
Polarity reversal protection	Yes

## Galvanic Isolation

Test voltage as per standard	IEC EN 60079-11
------------------------------	-----------------

# Isolator Barriers

Loop-powered binary output

Ex i field circuit

9276/10-21-60-00s Art. No. 261443



## Galvanic Isolation

Galvanic separation Ex i output to input	375 V AC peak value
--	---------------------

## Input

Input voltage for ON	15 – 30 V
----------------------	-----------

Input voltage for OFF	0 – 5 V
-----------------------	---------

## Output

Output open-circuit voltage $U_a$	21.9 V
-----------------------------------	--------

Max. output current $I_{a\max}$	58 mA
---------------------------------	-------

Output internal resistance $R_i$	133.4 $\Omega$
----------------------------------	----------------

Switching delay ON/OFF	$\leq 20$ ms
------------------------	--------------

Switching delay OFF/ON	$\leq 20$ ms
------------------------	--------------

Response time output	20 ms
----------------------	-------

Switching state indication	LED
----------------------------	-----

## Ambient Conditions

Ambient temperature °C	-40 °C ... +60 °C
------------------------	-------------------

Ambient temperature °F	-4 °F ... +140 °F
------------------------	-------------------

Storage temperature °C	-40 °C ... +80 °C
------------------------	-------------------

Storage temperature °F	-40 °F ... +176 °F
------------------------	--------------------

Max. relative humidity	10 to 95%
------------------------	-----------

Use at the height of	< 2000 m
----------------------	----------

Electromagnetic compatibility	EN 61326-1 Use in industrial environment Immunity according to EN 61000-6-2 Interference emission to EN 61000-6-4
-------------------------------	---

## Mechanical Data

Degree of protection (IP)	IP30
---------------------------	------

Degree of protection (IP) terminals	IP20
-------------------------------------	------

Fire resistance (UL 94)	V0
-------------------------	----

Enclosure material	Polyamide
--------------------	-----------

Grid dimension	12.5 mm
----------------	---------

Width	12.5 mm
-------	---------

Width, inches	0.49 in
---------------	---------

Height	114.5 mm
--------	----------

Height in inches	4.51 in
------------------	---------

Length	112.5 mm
--------	----------

Length in inches	4.43 in
------------------	---------

Weight	165 g
--------	-------

Weight	0.36 lb
--------	---------

## Mounting / Installation

Mounting type	DIN rail NS35/15, NS35/7.5
---------------	----------------------------

Mounting orientation	Vertical Horizontal
----------------------	------------------------

Connection type	Screw terminal
-----------------	----------------

Min. rigid conductor cross section	0.2 mm <sup>2</sup>
------------------------------------	---------------------

Max. rigid conductor cross section	2.5 mm <sup>2</sup>
------------------------------------	---------------------

Min. flex conductor cross section	0.2 mm <sup>2</sup>
-----------------------------------	---------------------

Max. flex conductor cross section	2.5 mm <sup>2</sup>
-----------------------------------	---------------------

# Isolator Barriers

Loop-powered binary output

Ex i field circuit

9276/10-21-60-00s Art. No. 261443



## Mounting / Installation



Connection cross-section AWG

24 ... 14

## Technical Drawings – Subject to Alterations

Hazardous Location


Nonhazardous Location

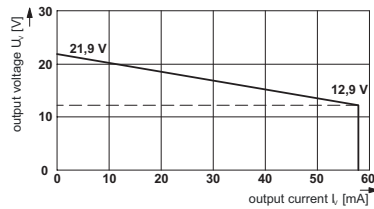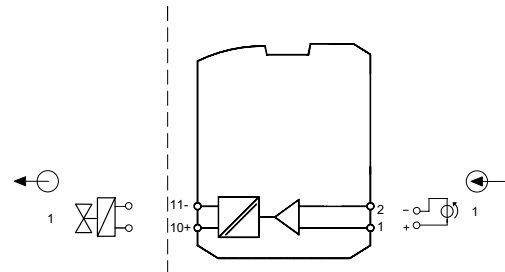

Output characteristic curve 9276/10-21-60-00

Connection diagram 9276/10


## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

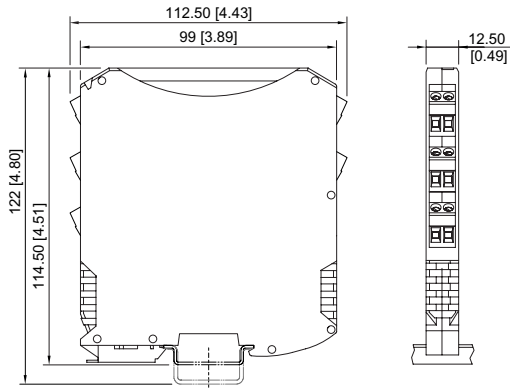


ISpac Series 9260, 9265, 9270, 9275, 9276, 9282 with screw terminal

## Accessories

### Supply module

		Art. No.
	Redundant supply of 24 V DC auxiliary power (with fuse) and reading out the collective error message from Series 92xx ISpac modules which support this function. Screw terminal connection	268183
	Redundant supply of 24 V DC auxiliary power (with fuse) and reading out the collective error message from Series 92xx ISpac modules which support this function. Spring clamp terminal connection	268184

### pac-Bus

		Art. No.
	Wiring auxiliary power and collective error message	262928

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.