


VB-TXWP7-ACC201333 Art. No. 340219

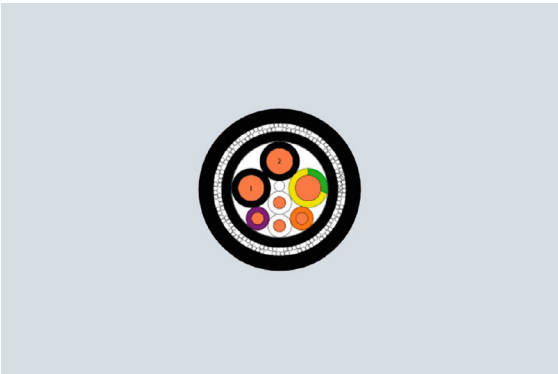

- Multi-core cable, 7-wire
- Mechanically robust
- UV- and oil-resistant, flame-retardant, cold-resistant

MY R. STAHL

A mechanically robust, shielded power and control cable for connecting the TXWP washing system to the junction box.

Technical Data

General	
Version	Watertank Solution
Description	Connection cable for TXWP (EZPUMP) camera water tank
Ambient Conditions	
Temperature range	-50 °C – 90 °C (fixed installation) -40 °C – 90 °C (occasional flexing)
Mechanical Data	
Connection cable	Power and control cable, screened 7 conductor, cross sectional area 1.5 mm² black, yellow/green
Degree of protection (IP)	15.9 mm
Shielding	Tinned Copper wires braid
Degree of protection (IP)	20 x Ø (occasional flexing) 6 x Ø (fixed installation)
Degree of protection (IP)	Halogen free, Oil- MUD- UV-resistant
Weight	401 g/m

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.