miniCON plug connector



8595/1-CB1-S-S10-00E Art. No. 298980



- · Simple handling using hot swap technology
- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation

MY R. STAHL 8595F



R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm² to 2.5 mm² are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazardous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

Technical Data

Explosion Protection		
Scope of validity	European Union (ATEX) IECEx	
Application range (zones)	1 2 21 22	
IECEx gas certificate	IECEx EPS 20.0035X	
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb	
IECEx gas explosion protection 2	Ex ia IIC T6 Ga	
IECEx dust certificate	IECEx EPS 20.0035X	
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db	
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da	
ATEX gas certificate	EPS 20 ATEX 1075 X	
ATEX gas explosion protection		
ATEX gas explosion protection 2		
ATEX dust certificate	EPS 20 ATEX 1075 X	
ATEX dust explosion protection		
ATEX dust explosion protection 2		
Certificates	ATEX (EPS), IECEx (EPS)	
Declaration of Conformity	ATEX (EUK)	

miniCON plug connector



8595/1-CB1-S-S10-00E Art. No. 298980


Electrical Data	
Rated operational voltage AC	500 V
Rated operational voltage DC	max. 110 V
Voltage tolerance	+10%
Rated insulation voltage	690 V
Rated operational current for AC	16 A
Rated operational current for DC	8 A
Rated operational current for DC 2	16 A
No. of poles	7 P + PE / 8 P
AC frequency range	50 – 60 Hz
Device Specific Data	
Back-up fuse with thermal protection	25 A GL
Back-up fuse without thermal protection	16 A GL
Ambient Conditions	·
Ambient temperature	-60 °C +75 °C
Ambient temperature	-76 °F +167 °F
Mechanical Data	
Version	Ex e flange socket
Degree of protection (IP) (IEC 60529)	IP66 IP67
IP degree of protection (IEC 60079)	IP64
Base part	Coupling
Enclosure material	Nickel-plated brass
Contact type	Socket contact
Connection cross-section	0.75 – 1 mm²
Connection cross-section 2	0.34 – 0.5 mm ²
Connection cross-section AWG	AWG18
Connection cross-section AWG2	AWG22-AWG20
Connection thread	M32 x 1.5
Impact strength (IEC 60079)	7 J
Coding	1-3, arbitrary
Seal	Silicone
Weight	400 g
Weight	0.88 lb
Mounting / Installation	
Connection type	crimp
Connection type 2	solder
Components	
Protective cap available	Yes

miniCON plug connector




8595/1-CB1-S-S10-00E Art. No. 298980

Technical Drawings – Subject to Alterations

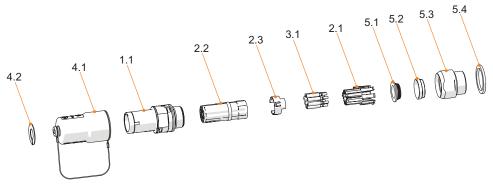

- Code disk
- Protective cap Coupling basic part
- 4.2 4.1 1.1 2.2 2.3 3.1 2.1 5.1 5.2 5.3 5.4 Insulator
- PE contact (only for metal variant)
- Contacts Contact holder
- Earthing ring
- Clamping disc
- Ex e adapter Seal

Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations

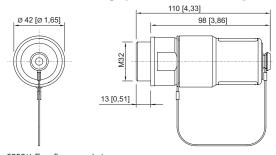

8595/1 Ex e flange socket

Accessories

EMC/shielding		Art. No.	
00	To create an EMC-compliant connection of braided, shielded or reinforced conductors.	307512	
Plug		Art. No	
	Enclosure material: Nickel-plated brass Contact type: Pin contact Connection cross-section: 0.75 to 1 mm² Number of poles: 7 P + PE/8 P Connection type: Crimping	298966	
	Enclosure material: Nickel-plated brass Contact type: Pin contact Connection cross-section: 0.75 to 1 mm² Number of poles: 7 P + PE/8 P Connection type: Crimping	298967	

miniCON plug connector



8595/1-CB1-S-S10-00E Art. No. 298980

	CMP-737DR Reducer M32 x 1.5 - M25 x 1.5	281584
	CMP-737DR Reducer M32 x 1.5 - M20 x 1.5 Brass	281582
educer	CMD 727DD Dadwar M22 v.4.5 M22 v.4.5	Art. No.
O ·		
000	Customer-specific labelling available on request	209939
oue aisks	KIT coding plate 8595, four colours, without labelling	289939
Code disks		Art. No.
	KIT 8595 socket contacts (0.75 to 1 mm²), 8 pieces	286152
Socket contact	VIT 0505	Art. No.
	for installation in Ex e enclosure	
	KIT 8595 nickel-plated brass adaptor, M32 x 1.5,	296754
	KIT 8595 nickel-plated brass adaptor, M25 x 1.5, for installation in Ex e enclosure	304568
	for installation in Ex e enclosure	
Adaptor	KIT 8595 nickel-plated brass adaptor, M20 x 1.5,	304566
daptor		Art. No.
3 3	- Adapted for miniCON contacts	
	 Exact positioning of the crimp contact during the crimping process Reliable, reproducible crimping result 	
	The selection of the contact mount is based on the crimp contacts to be processed.	299586
ontact mounts/p	ositioners for rotated industrial contacts	Art. No.
	For all versions with crimp connection of 0.14 to 6 mm ²	295689
rimping tool		Art. No.
	Connection type: Crimping	
•	Connection cross-section: 0.75 to 1 mm ² Number of poles: 7 P + PE/8 P	
TO S	Contact type: Pin contact	
	Enclosure material: Plastic	286551
	Connection type: Crimping	
	Connection cross-section: 0.75 to 1 mm ² Number of poles: 7 P + PE/8 P	
	Contact type: Pin contact	

Spare Parts

Jam nut, nickel-plated brass (-60 to +75 °C) To mount the cable entries in the through holes

Art. No.

miniCON plug connector



8595/1-CB1-S-S10-00E Art. No. 298980

	Material: Nickel-plated brass One piece Thread size: M32	110869
Contact holder	for socket contact	Art. No.
3 02	KIT 8595 socket contact insert + PE	286146
Protective cap		Art. No.
0	KIT 8595 coupling protective cap (socket) Incl. KIT 8595 coding plates, four colours, without labelling	286159

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.