miniCON plug connector



8595/1-PP1-S-S05-011 Art. No. 286530



- · Simple handling using hot swap technology
- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation

MY R. STAHL 8595B



R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm² to 2.5 mm² are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazardous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

Technical Data

Explosion Protection		
Scope of validity	European Union (ATEX)	
	IECEx	
Application range (zones)	1	
	2	
	21	
	22	
IECEx gas certificate	IECEx EPS 20.0035X	
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb	
IECEx gas explosion protection 2	Ex ia IIC T6 Ga	
IECEx dust certificate	IECEx EPS 20.0035X	
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db	
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da	
ATEX gas certificate	EPS 20 ATEX 1075 X	
ATEX gas explosion protection		
ATEX gas explosion protection 2		
ATEX dust certificate	EPS 20 ATEX 1075 X	
ATEX dust explosion protection		
ATEX dust explosion protection 2		
Certificates	ATEX (EPS), IECEx (EPS)	
Declaration of Conformity	ATEX (EUK)	

miniCON plug connector



8595/1-PP1-S-S05-011 Art. No. 286530


Electrical Data	
Rated operational voltage AC	500 V
Rated operational voltage DC	max. 110 V
Voltage tolerance	+10%
Rated insulation voltage	690 V
Rated operational current for AC	16 A
Rated operational current for DC	8 A
Rated operational current for DC 2	16 A
No. of poles	7 P + PE / 8 P
No. of poles note	Eight contacts are included in the delivery as standard. One to eight contacts can be used.
AC frequency range	50 – 60 Hz
Device Specific Data	
Back-up fuse with thermal protection	25 A GL
Back-up fuse without thermal protection	16 A GL
Ambient Conditions	•
Ambient temperature	-60 °C +75 °C
Ambient temperature	-76 °F +167 °F
Mechanical Data	
Version	Plug, reverse
Degree of protection (IP) (IEC 60529)	IP66 IP67
IP degree of protection (IEC 60079)	IP64
Base part	Plug
Enclosure material	Plastic
Contact type	Socket contact
Connection cross-section	0.5 mm ²
Connection cross-section 2	0.25 mm ²
Connection cross-section AWG	AWG20
Connection cross-section AWG2	AWG24
Clamping range	5 13 mm
Connection thread	M20 x 1.5
Impact strength (IEC 60079)	7 J
Coding	1-3, arbitrary
Seal	Silicone
Weight	174 g
Weight	0.38 lb
Mounting / Installation	
Connection type	crimp
Connection type 2	solder
Cable gland	Series 8161/7 made of plastic
Components	
Protective cap available	Yes

miniCON plug connector




8595/1-PP1-S-S05-011 Art. No. 286530

Technical Drawings – Subject to Alterations

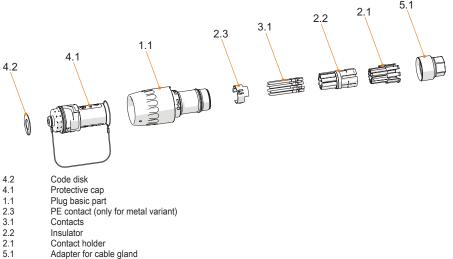

- Contacts
- Insulator
- Contact holder Adapter for cable gland

Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations



8595/1 plug

X = depending on the cable gland used

Accessories

Adaptor		Art. No. 299299
	KIT 8595 plastic adaptor, colour: blue for cable gland, M20 x 1.5	
	KIT 8595 plastic adaptor, colour: green for cable gland, M20 x 1.5	299297
	KIT 8595 plastic adaptor, colour: red for cable gland, M20 x 1.5	299298
oupling, reverse		Art. No.
	Enclosure material: Plastic Contact type: Pin contact Connection cross-section: 0.5 mm² Number of poles: 7 P + PE/8 P Connection type: Crimping	286564

miniCON plug connector



8595/1-PP1-S-S05-011 Art. No. 286530

rimping tool		Art. No.
	For all versions with crimp connection of 0.14 to 6 mm ²	295689
ontact mounts/po	ositioners for rotated industrial contacts	Art. No.
	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts	299586
2-ear clamps		Art. No.
	KIT 8595 2-ear clamps, small Strain relief depending on the cable gland used Cable outer diameter 5 to 13 mm	286168
Adaptor		Art. No.
\$ 0	KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M20 x 1.5 Cable outer diameter 5 to 13 mm	286162
Socket contact		Art. No
000	KIT 8595 socket contacts (0.25 to 0.5 mm²), 8 pieces	286151
Code disks		Art. No
000	KIT coding plate 8595, four colours, without labelling Customer-specific labelling available on request	289939
Cable gland made of plastic		Art. No
	8161/7-M20-1307-LT, Ex e Plastic, M20 x 1.5, cable outer diameter 7 to 13 mm Lot size 50 pieces	239204
	8161/8-M20-1307-LT, Ex i Plastic, M20 x 1.5, cable outer diameter 7 to 13 mm Lot size 50 pieces	239212

Spare Parts

Jam nut, nickel-plated brass (-60 to +75 °C)

To mount the cable entries in the through holes

Art. No.

miniCON plug connector



8595/1-PP1-S-S05-011 Art. No. 286530

	Material: Nickel-plated brass One piece Thread size: M32	110869
Contact holder	for socket contact	Art. No.
3 00	KIT 8595 socket contact insert	286145
Protective cap		Art. No.
0	KIT 8595 plug protective cap (pin/socket) Incl. KIT 8595 coding plates, four colours, without labelling	286161

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.