Installation equipment

miniCON plug connector

8595/1-CP1-S-P05-011 Art. No. 286564





- Simple handling using hot swap technology
- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- · Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation

MY R. STAHL 8595C



R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm² to 2.5 mm² are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazard-ous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

Technical Data

Explosion Protection

Scope of validity	European Union (ATEX)	
	IECEx	
Application range (zones)	1	
	2	
	21	
	22	
IECEx gas certificate	IECEx EPS 20.0035X	
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb	
IECEx gas explosion protection 2	Ex ia IIC T6 Ga	
IECEx dust certificate	IECEx EPS 20.0035X	
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db	
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da	
ATEX gas certificate	EPS 20 ATEX 1075 X	
ATEX gas explosion protection		
ATEX gas explosion protection 2	🐼 II 1 G Ex ia IIC T6 Ga	
ATEX dust certificate	EPS 20 ATEX 1075 X	
ATEX dust explosion protection		
ATEX dust explosion protection 2		
Certificates	ATEX (EPS), IECEx (EPS)	
Declaration of Conformity	ATEX (EUK)	



Electrical Data

Rated operational voltage AC	500 V
Rated operational voltage DC	max. 110 V
Voltage tolerance	+10%
Rated insulation voltage	690 V
Rated operational current for AC	16 A
Rated operational current for DC	8 A
Rated operational current for DC 2	16 A
No. of poles	7 P + PE / 8 P
No. of poles note	Eight contacts are included in the delivery as standard. One to eight contacts can be used.
AC frequency range	50-60 Hz
Device Specific Data	
Back-up fuse with thermal protection	25 A GL
Back-up fuse without thermal protection	16 A GL
Ambient Conditions	
Ambient temperature	-60 °C +75 °C
Ambient temperature	-76 °F +167 °F
Mechanical Data	
Version	Coupling, reverse
Degree of protection (IP) (IEC 60529)	IP66 IP67
IP degree of protection (IEC 60079)	IP64
Base part	Coupling
Enclosure material	Plastic
Contact type	Pin contact
Connection cross-section	0.5 mm ²
Connection cross-section 2	0.25 mm ²
Connection cross-section AWG	20 AWG
Connection cross-section AWG2	24 AWG
Clamping range	5 13 mm
Connection thread	M20 x 1.5
Impact strength (IEC 60079)	7 J
Coding	1-3, arbitrary
Seal	Silicone
Weight	130 g
Weight	0.29 lb
Mounting / Installation	
Connection type	crimp
Connection type 2	solder
Cable gland	Series 8161/7 made of plastic
Components	-
Protective cap available	Yes




miniCON plug connector




8595/1-CP1-S-P05-011 Art. No. 286564

Technical Drawings – Subject to Alterations

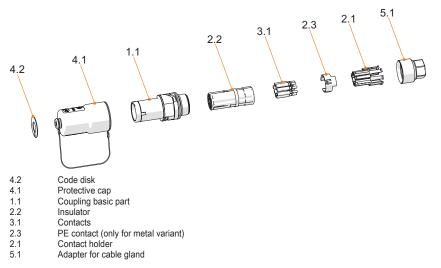

Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations



X = depending on the cable gland used

Accessories

Plug, reverse		Art. No.
	Enclosure material: Plastic Contact type: Socket contact	286530
	Connection cross-section: 0.5 mm ²	
	Number of poles: 7 P + PE/8 P	
	Connection type: Crimping	
Crimping tool	rimping tool	
	For all versions with crimp connection of 0.14 to 6 mm ²	295689
Contact mounts/p	ositioners for rotated industrial contacts	Art. No.
	The selection of the contact mount is based on the crimp contacts to be processed.	299586
E I	- Exact positioning of the crimp contact during the crimping process	
	- Reliable, reproducible crimping result	
1 2 3 4	- Adapted for miniCON contacts	



8595/1-CP1-S-P05-011 Art. No. 286564

ear clamps		Art. No.	
	KIT 8595 2-ear clamps, small Strain relief depending on the cable gland used Cable outer diameter 5 to 13 mm	286168	
Adaptor		Art. No.	
	KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M20 x 1.5 Cable outer diameter 5 to 13 mm	286162	
	KIT 8595 plastic adaptor, colour: blue for cable gland, M20 x 1.5	299299	
	KIT 8595 plastic adaptor, colour: green for cable gland, M20 x 1.5	299297	
	KIT 8595 plastic adaptor, colour: red for cable gland, M20 x 1.5	299298	
in contact		Art. No.	
	KIT 8595 pin contacts (0.25 to 0.5 mm ²), 8 pieces	286155	
	Code disks		
ode disks		Art. No.	
ode disks	KIT coding plate 8595, four colours, without labelling Customer-specific labelling available on request	289939	
code disks	Customer-specific labelling available on request		
000	Customer-specific labelling available on request	289939	

Spare Parts

Jam nut, nickel-plated brass Art. No.



8595/1-CP1-S-P05-011 Art. No. 286564

\bigcirc	Material: Nickel-plated brass One piece Thread size: M32	110869	
Contact holder f	or pin contact	Art. No.	
2) () ()	KIT 8595 pin contact insert	286147	
Protective cap		Art. No.	
0	KIT 8595 coupling protective cap (pin) Incl. KIT 8595 coding plates, four colours, without labelling	286160	

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.