miniCON plug connector



8595/1-PP1-S-P05-012 Art. No. 286549



- · Simple handling using hot swap technology
- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation

MY R. STAHL 8595B



R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm² to 2.5 mm² are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazardous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

Technical Data

Explosion Protection	
	Function (ATEV)
Scope of validity	European Union (ATEX)
	IEGEX
Application range (zones)	
	2
	21
	22
IECEx gas certificate	IECEx EPS 20.0035X
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb
IECEx gas explosion protection 2	Ex ia IIC T6 Ga
IECEx dust certificate	IECEx EPS 20.0035X
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da
ATEX gas certificate	EPS 20 ATEX 1075 X
ATEX gas explosion protection	
ATEX gas explosion protection 2	
ATEX dust certificate	EPS 20 ATEX 1075 X
ATEX dust explosion protection	
ATEX dust explosion protection 2	
Certificates	ATEX (EPS), IECEx (EPS)
Declaration of Conformity	ATEX (EUK)

miniCON plug connector



8595/1-PP1-S-P05-012 Art. No. 286549


Electrical Data	
Rated operational voltage AC	500 V
Rated operational voltage DC	max. 110 V
Voltage tolerance	+10%
Rated insulation voltage	690 V
Rated operational current for AC	16 A
Rated operational current for DC	8 A
Rated operational current for DC 2	16 A
No. of poles	7 P + PE / 8 P
No. of poles note	Eight contacts are included in the delivery as standard. One to eight contacts can be used.
AC frequency range	50 – 60 Hz
Device Specific Data	
Back-up fuse with thermal protection	25 A GL
Back-up fuse without thermal protection	16 A GL
Ambient Conditions	•
Ambient temperature	-60 °C +75 °C
Ambient temperature	-76 °F +167 °F
Mechanical Data	
Version	Plug
Degree of protection (IP) (IEC 60529)	IP66 IP67
IP degree of protection (IEC 60079)	IP64
Base part	Plug
Enclosure material	Plastic
Contact type	Pin contact
Connection cross-section	0.5 mm ²
Connection cross-section 2	0.25 mm ²
Connection cross-section AWG	AWG20
Connection cross-section AWG2	AWG24
Clamping range	13 17 mm
Connection thread	M25 x 1.5
Impact strength (IEC 60079)	7 J
Coding	1-3, arbitrary
Seal	Silicone
Weight	174 g
Weight	0.38 lb
Mounting / Installation	
Connection type	crimp
Connection type 2	solder
Cable gland	Series 8161/7 made of plastic
Components	
Protective cap available	Yes

miniCON plug connector




8595/1-PP1-S-P05-012 Art. No. 286549

Technical Drawings – Subject to Alterations

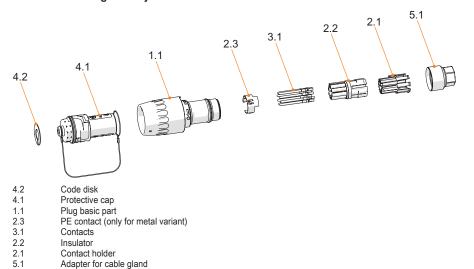

Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations

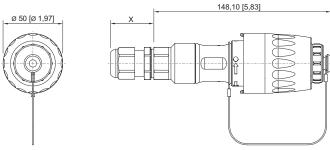

8595/1 plug X = depending on the cable gland used

Contact holder Adapter for cable gland

Accessories

Adaptor		Art. No.
0	KIT 8595 plastic adaptor, colour: blue for cable gland, M25 x 1.5	299322
	KIT 8595 plastic adaptor, colour: green for cable gland, M25 x 1.5	299300
	KIT 8595 plastic adaptor, colour: red for cable gland, M25 x 1.5	299321
Coupling		Art. No.
	Enclosure material: Nickel-plated brass Contact type: Socket contact Connection cross-section: 0.5 mm² Number of poles: 7 P + PE/8 P Connection type: Crimping	298976

miniCON plug connector



8595/1-PP1-S-P05-012 Art. No. 286549

	Enclosure material: Plastic	286557
	Contact type: Socket contact Connection cross-section: 0.5 mm²	
	Number of poles: 7 P + PE/8 P	
	Connection type: Crimping	
	Enclosure material: Stainless steel 1.4404	286597
The same	Contact type: Socket contact	
	Connection cross-section: 0.5 mm ²	
	Number of poles: 7 P + PE/8 P	
	Connection type: Crimping	
k e flange socket		Art. No.
	Enclosure material: Nickel-plated brass	298977
	Contact type: Socket contact	
•	Connection cross-section: 0.5 mm ²	
	Number of poles: 7 P + PE/8 P	
	Connection type: Crimping	
	Enclosure material: Stainless steel 1.4404	286598
	Contact type: Socket contact	
	Connection cross-section: 0.5 mm²	
	Number of poles: 7 P + PE/8 P	
	Connection type: Crimping	
rimping tool		Art. No.
	For all versions with crimp connection of 0.14 to 6 mm ²	295689
antact marintalna		
ontact mounts/pc	esitioners for rotated industrial contacts	Art. No.
ontact mounts/pc	The selection of the contact mount is based on the crimp contacts to be processed.	Art. No. 299586
ontact mounts/pc	The selection of the contact mount is based on the crimp contacts to be processed Exact positioning of the crimp contact during the crimping process	1
ontact mounts/pc	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result	1
ontact mounts/pc	The selection of the contact mount is based on the crimp contacts to be processed Exact positioning of the crimp contact during the crimping process	
	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result	1
	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big	299586
	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used	299586 Art. No.
	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big	299586 Art. No.
-ear clamps	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used	299586 Art. No. 286169
-ear clamps	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm	299586 Art. No. 286169 Art. No.
ear clamps O o o	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of:	299586 Art. No. 286169
ear clamps O o o	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M25 x 1.5	299586 Art. No. 286169 Art. No.
ear clamps	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of:	299586 Art. No. 286169 Art. No.
ear clamps daptor	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M25 x 1.5	299586 Art. No. 286169 Art. No.
-ear clamps	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M25 x 1.5 Cable outer diameter 13 to 17 mm	299586 Art. No. 286169 Art. No. 286163
-ear clamps Adaptor	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M25 x 1.5	299586 Art. No. 286169 Art. No. 286163
ear clamps daptor	The selection of the contact mount is based on the crimp contacts to be processed. - Exact positioning of the crimp contact during the crimping process - Reliable, reproducible crimping result - Adapted for miniCON contacts KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm KIT 8595 plastic adaptor, consisting of: Ex e adaptor and cable gland of Series 8161/7 made of plastic, M25 x 1.5 Cable outer diameter 13 to 17 mm	299586 Art. No. 286169 Art. No. 286163

miniCON plug connector



8595/1-PP1-S-P05-012 Art. No. 286549

Code disks	Code disks		
000	KIT coding plate 8595, four colours, without labelling Customer-specific labelling available on request	289939	
Cable gland ma	ade of plastic	Art. No	
	8161/7-M25-1710-LT, Ex e Plastic, M25 x 1.5, cable outer diameter 10 to 17 mm Lot size 50 pieces	239205	
	8161/8-M25-1710-LT, Ex i Plastic, M25 x 1.5, cable outer diameter 10 to 17 mm Lot size 50 pieces	239213	

Spare Parts

Jam nut, nickel-plated brass (-60 to +75 °C) To mount the cable entries in the through holes		Art. No.
	Material: Nickel-plated brass One piece Thread size: M32	110869
ontact holder for pin contact		Art. No.
	KIT 8595 pin contact insert	286147
rotective cap		Art. No
0	KIT 8595 plug protective cap (pin/socket) Incl. KIT 8595 coding plates, four colours, without labelling	286161

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.