# Installation equipment

miniCON plug connector

## 8595/1-PS1-S-P05-00E Art. No. 286586



#### · Simple handling using hot swap technology

- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- · Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation


### MY R. STAHL 8595D

R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm<sup>2</sup> to 2.5 mm<sup>2</sup> are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazard-ous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

### **Technical Data**

#### **Explosion Protection**

Scope of validity	European Union (ATEX)
	IECEx
Application range (zones)	1
	2
	21
	22
IECEx gas certificate	IECEx EPS 20.0035X
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb
IECEx gas explosion protection 2	Ex ia IIC T6 Ga
IECEx dust certificate	IECEx EPS 20.0035X
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da
ATEX gas certificate	EPS 20 ATEX 1075 X
ATEX gas explosion protection	ⓑ Ⅱ 2 G Ex db eb IIC T6 / T5 Gb
ATEX gas explosion protection 2	😡 II 1 G Ex ia IIC T6 Ga
ATEX dust certificate	EPS 20 ATEX 1075 X
ATEX dust explosion protection	
ATEX dust explosion protection 2	₪ II 1 D Ex ia IIIC T80 °C Da
Certificates	ATEX (EPS), IECEx (EPS)
Declaration of Conformity	ATEX (EUK)



### **Electrical Data**


Impact strength (IEC 60079) Coding	7 J 1-3, arbitrary
Connection thread	M32 x 1.5
Connection cross-section AWG	AWG20 AWG24
Connection cross-section 2	AWG20
Connection cross-section Connection cross-section 2	0.5 mm <sup>2</sup> 0.25 mm <sup>2</sup>
Contact type	Pin contact
Enclosure material	Stainless steel 1.4404
Base part	Plug
IP degree of protection (IEC 60079)	IP64
	IP67
Degree of protection (IP) (IEC 60529)	IP66
Version	Ex e device plug
Mechanical Data	
Ambient temperature	-76 °F +167 °F
Ambient temperature	-60 °C +75 °C
Ambient Conditions	
Back-up fuse without thermal protection	16 A GL
Back-up fuse with thermal protection	25 A GL
Device Specific Data	·
AC frequency range	50 – 60 Hz
No. of poles	7 P + PE / 8 P
Rated operational current for DC 2	16 A
Rated operational current for DC	8 A
Rated operational current for AC	16 A
Rated insulation voltage	690 V
Voltage tolerance	+10%
Rated operational voltage DC	max. 110 V
Rated operational voltage AC	500 V




STAHL

## 8595/1-PS1-S-P05-00E Art. No. 286586

#### **Technical Drawings – Subject to Alterations**

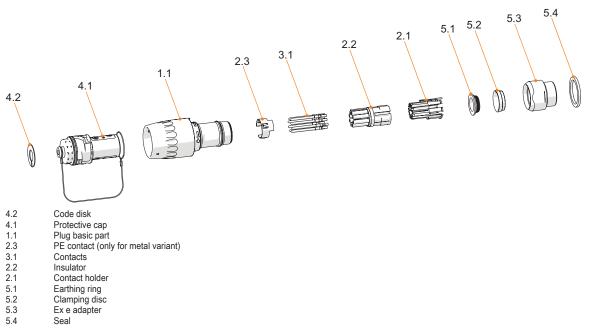

#### Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations



### Accessories

Coupling		Art. No.
	Enclosure material: Plastic Contact type: Socket contact Connection cross-section: 0.5 mm <sup>2</sup> Number of poles: 7 P + PE/8 P Connection type: Crimping	286556
	Enclosure material: Plastic Contact type: Socket contact Connection cross-section: 0.5 mm <sup>2</sup> Number of poles: 7 P + PE/8 P Connection type: Crimping	286557
	Enclosure material: Stainless steel 1.4404 Contact type: Socket contact Connection cross-section: 0.5 mm <sup>2</sup> Number of poles: 7 P + PE/8 P Connection type: Crimping	286596



#### 8595/1-PS1-S-P05-00E Art. No. 286586

	Enclosure material: Stainless steel 1.4404 Contact type: Socket contact Connection cross-section: 0.5 mm <sup>2</sup> Number of poles: 7 P + PE/8 P Connection type: Crimping	286597
--	---	--------

#### **EMC**/shielding



Art	
To create an EMC-compliant connection of braided, shielded or reinforced conductors. 307	)7512

#### Cr



Crimping tool		Art. No.
	For all versions with crimp connection of 0.14 to 6 mm <sup>2</sup>	295689

The selection of the contact mount is based on the crimp contacts to be processed. 29   - Exact positioning of the crimp contact during the crimping process 29   - Reliable, reproducible crimping result - Adapted for miniCON contacts	299586

#### Adaptor

Adaptor		Art. No.
0	KIT 8595 stainless steel adaptor, M20 x 1.5, for installation in Ex e enclosure	304565
	KIT 8595 stainless steel adaptor, M25 x 1.5, for installation in Ex e enclosure	304567
	KIT 8595 stainless steel adaptor, M32 x 1.5, for installation in Ex e enclosure	286166

Pin contact		Art. No.
	KIT 8595 pin contacts (0.25 to 0.5 mm <sup>2</sup> ), 8 pieces	286155

Code disks		Art. No.
000	KIT coding plate 8595, four colours, without labelling Customer-specific labelling available on request	289939

Reducer		Art. No.
	CMP-737DR Reducer M32 x 1.5 - M20 x 1.5 Stainless steel	281583
	CMP-737DR Reducer M32 x 1.5 - M25 x 1.5 Stainless steel	281586

## **Spare Parts**

miniCON plug connector



## 8595/1-PS1-S-P05-00E Art. No. 286586

o mount the c	able entries in the through holes	Art. No.
	Material: Nickel-plated brass One piece Thread size: M32	110869
ontact holder	for pin contact	Art. No.
) ) )	KIT 8595 pin contact insert + PE	286148
Protective cap		Art. No.
	KIT 8595 plug protective cap (pin/socket)	286161
0	Incl. KIT 8595 coding plates, four colours, without labelling	

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.