### miniCON plug connector



### 8595/1-PB1-S-P10-00E Art. No. 298968



- · Simple handling using hot swap technology
- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation

### MY R. STAHL 8595D



R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm² to 2.5 mm² are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazardous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

### **Technical Data**

Explosion Protection	
Scope of validity	European Union (ATEX)
	IECEx
Application range (zones)	1
	2
	21
	22
IECEx gas certificate	IECEx EPS 20.0035X
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb
IECEx gas explosion protection 2	Ex ia IIC T6 Ga
IECEx dust certificate	IECEx EPS 20.0035X
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da
ATEX gas certificate	EPS 20 ATEX 1075 X
ATEX gas explosion protection	
ATEX gas explosion protection 2	
ATEX dust certificate	EPS 20 ATEX 1075 X
ATEX dust explosion protection	
ATEX dust explosion protection 2	
Certificates	ATEX (EPS), IECEx (EPS)
Declaration of Conformity	ATEX (EUK)

# miniCON plug connector



## 8595/1-PB1-S-P10-00E Art. No. 298968


Electrical Data	
Rated operational voltage AC	500 V
Rated operational voltage DC	max. 110 V
Voltage tolerance	+10%
Rated insulation voltage	690 V
Rated operational current for AC	16 A
Rated operational current for DC	8 A
Rated operational current for DC 2	16 A
No. of poles	7 P + PE / 8 P
AC frequency range	50 – 60 Hz
Device Specific Data	
Back-up fuse with thermal protection	25 A GL
Back-up fuse without thermal protection	16 A GL
Ambient Conditions	
Ambient temperature	-60 °C +75 °C
Ambient temperature	-76 °F +167 °F
Mechanical Data	
Version	Ex e device plug
Degree of protection (IP) (IEC 60529)	IP66 IP67
IP degree of protection (IEC 60079)	IP64
Base part	Plug
Enclosure material	Nickel-plated brass
Contact type	Pin contact
Connection cross-section	0.75 – 1 mm²
Connection cross-section 2	0.34 – 0.5 mm²
Connection cross-section AWG	AWG18
Connection cross-section AWG2	AWG22-AWG20
Connection thread	M32 x 1.5
Impact strength (IEC 60079)	7 J
Coding	1-3, arbitrary
Seal	Silicone
Weight	567 g
Weight	1.25 lb
Mounting / Installation	
Connection type	crimp
Connection type 2	solder
Components	
Protective cap available	Yes

## miniCON plug connector




#### 8595/1-PB1-S-P10-00E Art. No. 298968

### **Technical Drawings – Subject to Alterations**

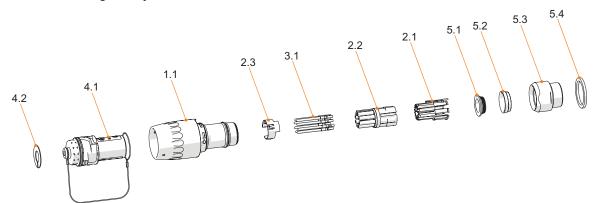

- Code disk
- Protective cap
- Plug basic part
- PE contact (only for metal variant)
- 4.2 4.1 1.1 2.3 3.1 2.2 2.1 5.1 5.2 5.3 Contacts
- Insulator
- Contact holder
- Earthing ring Clamping disc
- Ex e adapter
- Seal

### Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations

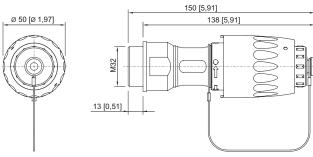

8595/1 Ex e device plug

### **Accessories**

Coupling		Art. No.	
	Enclosure material: Nickel-plated brass	298978	
	Contact type: Socket contact		
	Connection cross-section: 0.75 to 1 mm <sup>2</sup>		
	Number of poles: 7 P + PE/8 P		
	Connection type: Crimping		
An .	Enclosure material: Nickel-plated brass	298979	
The same	Contact type: Socket contact		
	Connection cross-section: 0.75 to 1 mm²		
	Number of poles: 7 P + PE/8 P		
	Connection type: Crimping		
EMC/shielding		Art. No.	
00	To create an EMC-compliant connection of braided, shielded or reinforced conductors.	307512	

# miniCON plug connector



## 8595/1-PB1-S-P10-00E Art. No. 298968

rimping tool		Art. No.	
	For all versions with crimp connection of 0.14 to 6 mm <sup>2</sup>	295689	
Contact mounts/p	ositioners for rotated industrial contacts	Art. No.	
	The selection of the contact mount is based on the crimp contacts to be processed.  - Exact positioning of the crimp contact during the crimping process  - Reliable, reproducible crimping result  - Adapted for miniCON contacts	299586	
Adaptor		Art. No.	
0	KIT 8595 nickel-plated brass adaptor, M20 x 1.5, for installation in Ex e enclosure	304566	
	KIT 8595 nickel-plated brass adaptor, M25 x 1.5, for installation in Ex e enclosure	304568	
	KIT 8595 nickel-plated brass adaptor, M32 x 1.5, for installation in Ex e enclosure	296754	
Pin contact		Art. No.	
	KIT 8595 pin contacts (0.75 to 1 mm²), 8 pieces	286156	
Code disks		Art. No.	
000	KIT coding plate 8595, four colours, without labelling Customer-specific labelling available on request	289939	
Reducer		Art. No.	
	CMP-737DR Reducer M32 x 1.5 - M20 x 1.5 Brass	281582	
	CMP-737DR Reducer M32 x 1.5 - M25 x 1.5 Brass	281584	
Spare Parts			
•	ated brass (-60 to +75 °C) le entries in the through holes	Art. No.	
	Material: Nickel-plated brass One piece Thread size: M32	110869	
Contact holder for pin contact		Art. No.	
	-	286148	

# miniCON plug connector



## 8595/1-PB1-S-P10-00E Art. No. 298968

Protective cap		Art. No.
0	KIT 8595 plug protective cap (pin/socket) Incl. KIT 8595 coding plates, four colours, without labelling	286161

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.