### miniCON plug connector



### 8595/1-CB1-S-S05-002 Art. No. 298976



- · Simple handling using hot swap technology
- · Versatile application possibilities thanks to modular structure
- · Most extreme operating conditions in hazardous areas
- Reliable data and signal connections or power supplies
- Simple connection and disconnection thanks to one-handed operation

### MY R. STAHL 8595C



R. STAHL's Series 8595/1 explosion-protected miniCON plug connectors with up to eight poles keep you safely connected. The high-quality plastic or stainless steel plug connectors have impressed many customers with their reliability and versatility in application. Their hot swap disconnecting capacity means that intrinsically safe signal supplies and power supplies up to 500 V/16 A can be connected and disconnected reliably and safely without the need for a hot work permit or other hot work authorisation. The miniCON connectors designed for conductor cross-sections of 0.25 mm² to 2.5 mm² are available for directly connecting electrical lines or for device installation in the device plug and flange socket types of construction. The new plug connectors for hazardous areas in Zones 1 and 21 stand out from the competition thanks to their modular structure and logically arranged components, which enable quick, easy mounting. Our patented single-handed operation means that matching plug connectors, which can be defined by the installer using internal coding for up to three applications, can be connected in no time.

#### **Technical Data**

Explosion Protection		
Scope of validity	European Union (ATEX)	
	IECEx	
Application range (zones)	1	
	2	
	21	
	22	
IECEx gas certificate	IECEx EPS 20.0035X	
IECEx gas explosion protection	Ex db eb IIC T6 / T5 Gb	
IECEx gas explosion protection 2	Ex ia IIC T6 Ga	
IECEx dust certificate	IECEx EPS 20.0035X	
IECEx dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db	
IECEx dust explosion protection 2	Ex ia IIIC T80 °C Da	
ATEX gas certificate	EPS 20 ATEX 1075 X	
ATEX gas explosion protection		
ATEX gas explosion protection 2	⑤ II 1 G Ex ia IIC T6 Ga	
ATEX dust certificate	EPS 20 ATEX 1075 X	
ATEX dust explosion protection		
ATEX dust explosion protection 2		
Certificates	ATEX (EPS), IECEx (EPS)	
Declaration of Conformity	ATEX (EUK)	

## miniCON plug connector



### 8595/1-CB1-S-S05-002 Art. No. 298976


Electrical Data	
Rated operational voltage AC	500 V
Rated operational voltage DC	max. 110 V
Voltage tolerance	+10%
Rated insulation voltage	690 V
Rated operational current for AC	16 A
Rated operational current for DC	8 A
Rated operational current for DC 2	16 A
No. of poles	7 P + PE / 8 P
No. of poles note	Eight contacts are included in the delivery as standard. One to eight contacts can be used.
AC frequency range	50 – 60 Hz
Device Specific Data	
Back-up fuse with thermal protection	25 A GL
Back-up fuse without thermal protection	16 A GL
Ambient Conditions	
Ambient temperature	-60 °C +75 °C
Ambient temperature	-76 °F +167 °F
Mechanical Data	
Version	Coupling
Degree of protection (IP) (IEC 60529)	IP66 IP67
IP degree of protection (IEC 60079)	IP64
Base part	Coupling
Enclosure material	Nickel-plated brass
Contact type	Socket contact
Connection cross-section	0.5 mm <sup>2</sup>
Connection cross-section 2	0.25 mm <sup>2</sup>
Connection cross-section AWG	AWG20
Connection cross-section AWG2	AWG24
Connection thread	M25 x 1.5
Impact strength (IEC 60079)	7 J
Coding	1-3, arbitrary
Seal	Silicone
Weight	323 g
Weight	0.71 lb
Mounting / Installation	•
Connection type	crimp
Connection type 2	solder
Components	
Protective cap available	Yes

### miniCON plug connector




#### 8595/1-CB1-S-S05-002 Art. No. 298976

#### **Technical Drawings – Subject to Alterations**

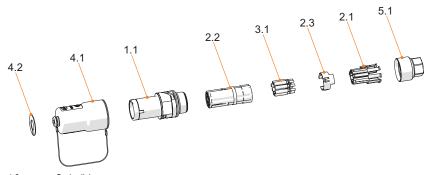

- Code disk
- 4.2 4.1 1.1 2.2 3.1 2.3 2.1 5.1 Protective cap Coupling basic part
- Insulator
- Contacts
- PE contact (only for metal variant)
- Contact holder
  Adapter for cable gland

#### Dimensional Drawings (All Dimensions in mm [inches]) - Subject to Alterations



8595/1 coupling X = depending on the cable gland used

#### **Accessories**

Adaptor		Art. No.
	8595 nickel-plated brass adaptor for cable gland, M16 x 1.5	314522
Ex e device plug		Art. No.
	Enclosure material: Nickel-plated brass Contact type: Pin contact Connection cross-section: 0.5 mm² Number of poles: 7 P + PE/8 P Connection type: Crimping	298965
Plug		Art. No.
	Enclosure material: Nickel-plated brass  Contact type: Pin contact  Connection cross-section: 0.5 mm²  Number of poles: 7 P + PE/8 P  Connection type: Crimping	298964

## miniCON plug connector



### 8595/1-CB1-S-S05-002 Art. No. 298976

	Enclosure material: Plastic Contact type: Pin contact Connection cross-section: 0.5 mm² Number of poles: 7 P + PE/8 P	286549
	Connection type: Crimping	
Crimping tool		Art. No.
	For all versions with crimp connection of 0.14 to 6 mm <sup>2</sup>	295689
Contact mounts/pos	sitioners for rotated industrial contacts	Art. No.
	The selection of the contact mount is based on the crimp contacts to be processed.  - Exact positioning of the crimp contact during the crimping process  - Reliable, reproducible crimping result  - Adapted for miniCON contacts	299586
2-ear clamps		Art. No.
03	KIT 8595 2-ear clamps, big Strain relief depending on the cable gland used Cable outer diameter 13 to 17 mm	286169
Adaptor		Art. No.
	KIT 8595 nickel-plated brass adaptor for cable gland, M25 x 1.5	296753
Socket contact		Art. No.
000	KIT 8595 socket contacts (0.25 to 0.5 mm²), 8 pieces	286151
Code disks		Art. No.
000	KIT coding plate 8595, four colours, without labelling Customer-specific labelling available on request	289939
Metal cable gland		Art. No.
	CMP type 25C2K, Ex e Nickel-plated brass, M25 x 1.5, for armoured cables, thread length 10 mm Cable outer diameter 18.2 to 26.2 mm	309135
	CMP type 25A2e100, Ex e Nickel-plated brass, M25 x 1.5, for unarmoured cables Cable outer diameter 11.5 to 19.5 mm	309138
		•

### **Spare Parts**

## miniCON plug connector



### 8595/1-CB1-S-S05-002 Art. No. 298976

Jam nut, nick Fo mount the	Art. No.	
	Material: Nickel-plated brass One piece Thread size: M32	110869
Contact holde	er for socket contact	Art. No.
<b>≥</b> 0€	KIT 8595 socket contact insert + PE	286146
Protective cap		Art. No.
0	KIT 8595 coupling protective cap (socket) Incl. KIT 8595 coding plates, four colours, without labelling	286159

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.