



- Control of 5 output circuits. Option for up to 8 output circuits.
- Illuminated push buttons with indicator light.
- Custom specific button text.

E6

MY R. STAHL T4500901A




Ex remote control panel for use in combination with Tranberg “Commander” control cabinet, part no. 4500203.



	IECEX / ATEX					
Zone	0	1	2	20	21	22
Installation in		•	•			

Selection Table								
Silicone-free Certificates			No ATEX (PRE)					
Width	Width, inches	Height	Height in inches	Depth	Depth in inches	Product Type	Art. No.	Weight
235 mm	9.251 in	353 mm	13.8976 in	126 mm	4.96 in	TEF4500901	241935	3.2 kg



Technical Data	
Explosion Protection	
IECEX gas certificate	IECEX PRE 14.0001
ATEX gas explosion protection	Ⓔ II 2 G Ex db eb IIC T4 Gb
Notes	Product label may vary. Series devices are labelled with ATEX and IECEX.
Electrical Data	
Rated operational current	3 A
Ambient Conditions	
Ambient temperature	-20 °C ... +45 °C
Mechanical Data	
Degree of protection IP (IEC 60529)	IP66
Enclosure material	Stainless steel 1.4404, (AISI 316L), brush finished
Cover fixing type	with screws
Components	
Flange and plates	Without flange

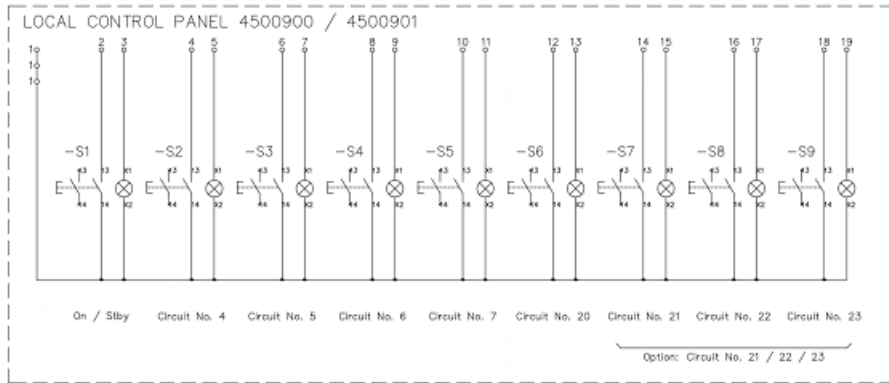

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

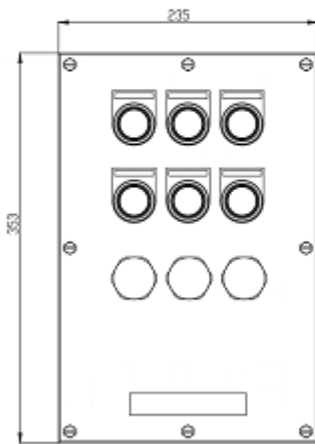

460A106548

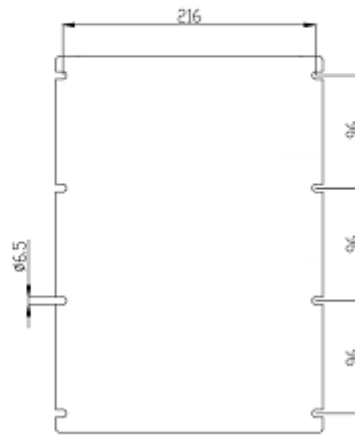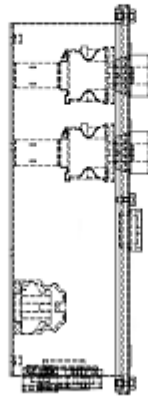

TEF 4500 901
MOUNTING DIMENSIONS