

## Remote I/O

### IS1+ Remote I/O Digital output module

For Zone 1 Ex i

9475/32-04-12 Art. No. 210651



- 4 channels for Ex i solenoid valves up to 40 mA
- Ex nA outputs with line fault monitoring, an LED fault and status display for each channel and SIL2 shutdown input
- Modules in Zone 1 can be replaced without having to disconnect the power supply (i.e. hot-swapped)

MY R. STAHL 9475E



The 9475/32-04 digital output modules for Zone 1 have four channels for controlling Ex i solenoid valves or indicator lamps. An additional Ex i control input is suitable for safe shutdown up to SIL 2. All outputs are short-circuit proof, galvanically separated from the system and individually monitored to check for wire breakage/short-circuiting.

## Technical Data

### Explosion Protection

Application range (zones)	1 2
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX DEK 12.0070X
IECEX gas explosion protection	Ex ia [ia Ga] IIC T4 Gb
IECEX dust certificate	IECEX DEK 12.0070X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	DEKRA 12 ATEX0232X
ATEX gas explosion protection	⊕ II 2 (1) G Ex ia [ia Ga] IIC T4 Gb
ATEX dust certificate	DEKRA 12 ATEX0232X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
FMus certificate	FM17US0332X
cFM certificate	FM16CA0134X
Marking cFMus	IS, Class I, Div. 1, Groups A,B,C,D; Class I, Zone 1, AEx/Ex ia [ia] IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; T4 at Ta = 75°C See Doc. 9475 6 031 001 1
Certificates	ATEX (DEK), Brazil (ULB), Canada (FM), China (NEPSI), IECEX (DEK), India (PESO), Korea (KTL), SIL (exida), USA (FM)
Ship approval	ABS, BVIS, EU RO MR (DNV), KR, LR
Declaration of Conformity	ATEX (EUK), China (CCC)
Installation	Zone 1, Zone 2 and safe areas
Further information	See relevant certificate and operating instructions

# Remote I/O

## IS1+ Remote I/O Digital output module

### For Zone 1 Ex i

9475/32-04-12 Art. No. 210651



#### Safety Data

Max. voltage $U_o$	19.7 V							
Max. current $I_o$ (Ex ia)	142 mA							
Max. power $P_o$ (Ex ia)	698 mW							
Max. current $I_o$ (Ex ib)	53.8 mA							
Max. power $P_o$ (Ex ib)	617 mW							
Internal inductance	Negligible							
Max. internal capacitance $C_i$	11 nF (in the following tables, $C_i$ has been subtracted from $C_o$ )							
Max. connectable inductance $L_o$ /capacitance $C_o$								
Output ia								
IIC	$L_o$ [mH]	1.3	1.1	0.5	0.2	0.1	0.05	
	$C_o$ [nF]	99	109	119	149	189	220	
IIB/IIIC	$L_o$ [mH]	7.5	5.0	2.0	0.5	0.2	0.1	0.05
	$C_o$ [nF]	669	879	889	889	989	1189	1439
Output ib								
IIC	$L_o$ [mH]	3.1	2.0	0.6	0.5	0.2	0.1	0.05
	$C_o$ [nF]	109	109	119	119	149	189	220
IIB/IIIC	$L_o$ [mH]	27	20	10	5.0	0.2	0.1	0.05
	$C_o$ [nF]	499	609	869	899	1089	1189	1439
Ex i control input "Plant STOP"								
Connection terminals	X3 1, 2 (without galvanic separation, compatible with 9575/22)						X3 3, 4 (with galvanic separation, switchable in parallel)	
Type of protection	Ex ia						Ex ia	
Max. voltage $U_o$	5.1 V						--	
Max. current $I_o$	0.44 mA						--	
Max. power $P_o$	0.5 mW						--	
Max. connectable inductance $L_o$ /capacitance $C_o$								
IIC	$L_o$ [mH]	100	10	2	1	0.2	0.01	--
	$C_o$ [nF]	2.195	2.595	3.295	3.695	5.495	15.995	--
IIB/IIIC	$L_o$ [mH]	100	10	2	1	0.2	0.01	--
	$C_o$ [nF]	9.995	12.995	16.995	19.995	31.995		--
Max. voltage $U_i$	--						30 V	
Max. internal resistance $R_i$	--						4940 $\Omega$	

#### Electrical Data

Number of channels	4 Ex i outputs
Connection Ex i field signals	Pluggable, blue terminals, 16-pin, 2.5 mm <sup>2</sup> , screw type or cage clamp version with lock
Connection Ex i Steuereingang	Pluggable, blue terminals, 2-pin, 2.5 mm <sup>2</sup> , screw type version with lock

# Remote I/O

## IS1+ Remote I/O Digital output module

For Zone 1 Ex i

9475/32-04-12 Art. No. 210651



Ex i X3 control input Connection terminals		X3 1, 2 (without galvanic separation, compatible with 9575/22)	X3 3, 4 (with galvanic separation, switchable in parallel)
	Supply voltage	3.3 V	--
	Internal resistance	20.5 kΩ	--
	Control voltage for all outputs "OFF" ("Plant STOP" activated)	> 2.2 V	< 1 V
	"Normal operation" ("Plant STOP" deactivated)	< 0.7 V	> 6 V

### Auxiliary Power

Power supply connection	BusRail types 9494
Auxiliary power version	Intrinsically safe Ex ia via BusRail
Behaviour during undervoltage	All outputs "OFF"
Current consumption	210 mA
Max. power consumption	5 W
Max. power dissipation outputs	4 W

### Galvanic Isolation

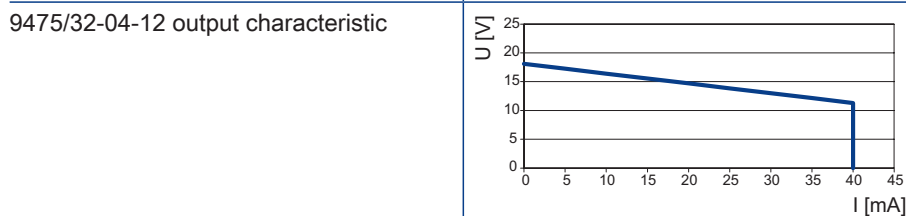
Test voltage for galvanic separation	Acc. to standard EN 60079-11
Auxiliary power/system components	≥ 1500 V AC
I/O module / I/O module	≥ 500 V AC
I/O channels/system components	≥ 500 V AC
I/O channels / ground (PA)	≥ 500 V AC
I/O channels/plant STOP X3 3,4	≥ 500 V AC
Plant STOP X3 3,4/earth (PA)	≥ 500 V AC

### Input

Control input	Ex i control input X3
Control input suitability	Shutdown up to SIL 2, low demand (IEC 61508)
Control input function	"Plant STOP" for switching off all outputs

### Output

Ex i output rated operation	11.3 V/40 mA
Internal resistance of outputs	170 Ω
Open-circuit voltage $U_a$	17.9 V



### Device Specific Data

Diagnostics message module	OFF ON
Line fault monitoring	ON without test current OFF ON
Test current signal	0,2 ... 0,28 mA

# Remote I/O

## IS1+ Remote I/O Digital output module

### For Zone 1 Ex i

9475/32-04-12 Art. No. 210651



#### Device Specific Data

Output behaviour in case of error	Keep last value ON OFF
LED module requires maintenance	"M/S" LED, blue
LED operating conditions	"RUN" LED, green
LED channel error	LED for each channel, red
LED channel status	LED per channel, yellow
"Plant STOP" LED	(all outputs are high-impedance) "Plant STOP" LED, yellow
Retrievable parameters	Hardware revision Manufacturer Serial number Software revision Type
Signal status bit	"1" = Output supplied with power "0" = High-impedance output
Wire breakage output	> 10 k $\Omega$ (when the test current is deactivated, can only be detected if the output is switched on)
Short circuit output	< 30 $\Omega$ (response range 30 to 60 $\Omega$ ) (can be detected only if the output is switched on)

#### Diagnostics

LED group error	"ERR" LED, red
-----------------	----------------

#### Ambient Conditions

Ambient temperature	-40°C ... +75°C
Ambient temperature	-40°F ... +167°F
Storage temperature	-40°C ... +80°C
Storage temperature	-40°F ... +176°F
Max. operating altitude	< 2000 m
Max. relative humidity	95% (without condensation)
Shock (semi-sinusoidal)	(IEC EN 60068-2-27) 15 g (3 shocks per axis and direction)
Vibration (sinusoidal)	(IEC EN 60068-2-6) Frequency range 2 to 13.2 Hz Amplitude 1 mm (peak value) Frequency range 13.2 to 100 Hz Acceleration amplitude 0.7 g
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 (2006) IEC 61000-4-1 to 61000-4-6, NAMUR NE 21
Note	(observe operating instructions)

#### Mechanical Data

Degree of protection (IP) (IEC 60529)	IP20
Module enclosure	Polyamide 6GF
Fire resistance (UL 94)	V2
Pollutant class	Corresponds to G3
Width	96.5 mm
Width, inches	3.8 in
Height	67 mm
Length	128 mm
Length, inches	5.04 in
Mounting depth, inches	2.64 in

# Remote I/O

## IS1+ Remote I/O Digital output module

### For Zone 1 Ex i

9475/32-04-12 Art. No. 210651




#### Mechanical Data

Weight	275 g
Weight	0.61 lb

#### Mounting / Installation

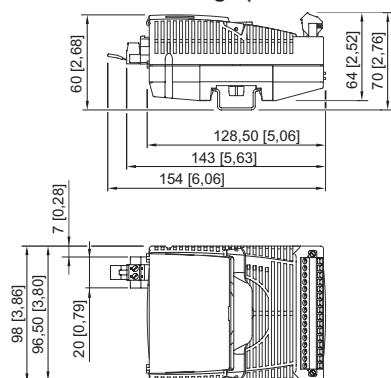
Mounting type	on NS 35/15 DIN rail (DIN EN 60715)
Mounting orientation	Horizontal Vertical

#### Technical Drawings – Subject to Alterations





9475/32-04-12 output characteristic

#### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations




## Accessories

#### Pluggable terminal

		Art. No.
	2.5 mm <sup>2</sup> with lock, 16-pin, screw connector, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Labelling: 1 to 16 Note: A second terminal is additionally required for I/O module Series 9470 and 9482 Labelling: 17 to 32	162702
	2.5 mm <sup>2</sup> with lock, 16-pin, spring clamp connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits, incl. test jacks Labelling: 1 to 16 Note: A second terminal is additionally required for I/O module Series 9470 and 9482 Labelling: 17 to 32	162695

#### Electronic relay

		Art. No.
	The 9174 electronic relay module makes it possible to switch Ex e loads using an intrinsically safe control system. Input: Ex i; output: 31.2 V/2 A DC, Ex e	212340


# Remote I/O

## IS1+ Remote I/O Digital output module

### For Zone 1 Ex i


9475/32-04-12 Art. No. 210651



	<p>The electronic relay modules are used to switch Ex e loads using an intrinsically safe (Ex i) or non-intrinsically safe (Ex e) control system.          Coil circuit: Ex i or non-Ex i (Ex e)*          Contact circuit: Non-Ex i (Ex e)          *It is possible to switch between Ex i and non-Ex i circuits, or vice versa, at any time without restriction.</p>	282457
--	--	--------


Note: Cannot be used with 9475/32-04-12, 9475/32-08-52, 9475/33-08-50

#### Ex i/Ex e relay module for Zone 1 Art. No.


	<p>The Ex i/Ex e relay module is used for the galvanically isolated switching of intrinsically safe (Ex i) and non-Ex i (Ex e) electrical circuits.          Coil circuit: Ex i or non-Ex i (Ex e)          Contact circuit: Ex i or non-Ex i (Ex e)          Thanks to the integrated safeguarding for the contact and coil circuit, additional safeguarding is not necessary.</p>	273000
--	---	--------

Note: no usable with 9475/32-04-12, 9475/32-08-52, 9475/33-08-50


#### Partition Art. No.

	<p>For mounting between intrinsically safe and non-intrinsically safe connections between I/O modules to maintain a tight string length of 50 mm</p>	220101
---	--	--------


#### Resistor error message suppression Art. No.

	<p>The resistors are used to suppress error messages for unused I/O channels          Resistance value: 5K6/0.5 W          Suitable for: AIM 9468; UMH 9469; DIOM 9470; DIOM 9471; DIOM 9472; DOM 9475          For intrinsically safe circuits (simple apparatus according to EN 60079-11)</p>	244911
--	---	--------


#### Warning label Art. No.

	<p>"Clean modules only with a damp cloth."</p>	162796
--	--	--------

#### DIN A4 sheet Art. No.

	<p>For label plate on I/O modules; 6 plates per sheet;          IS Wizard printout; packaging unit = 20 sheets</p>	162832
--	--	--------

#### Labelling strips Art. No.


	<p>"FB Addr ... Mod No ..." for pluggable terminal, 26 pieces on the sheet</p>	162788
--	--	--------

## Remote I/O

### IS1+ Remote I/O Digital output module


For Zone 1 Ex i


9475/32-04-12 Art. No. 210651

Vibration bracket set	Art. No.
 <p>When installed in environments with extreme vibration (&gt; 0.7 g and max. 4 g), the 9490 vibration brackets may be used as an additional measure and provide mechanical stability for the individual modules.</p> <p>For mounting: All I/O modules, except 9477/12 and 9478</p> <p>Number of brackets in a set: 8</p> <p>Screws (item no. 275516) must be ordered separately.</p>	271920

Set of screws	Art. No.
<p>Set of M5 x 14 screws (self-tapping) for 9490 vibration brackets</p> <p>Number of screws in a set: 25</p>	275516

## Spare Parts

Ex i LED indicator lamp	Art. No.
 <p>8010/3-02 LED indicator lamp for intrinsically safe circuits, Ex i</p>	237972

LED indicator lamp for front installation	Art. No.
 <p>for Ex i front installation</p>	240901

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.