

# Isolators

Transmitter supply unit

Ex i field circuit

9160/23-10-10k Art. No. 214904



- Can be used universally for 2- and 3-wire transmitters and mA sources (4-wire transmitters)
- High accuracy
- For use up to SIL 2, special variant up to SIL 3 (IEC/EN 61508)

MY R. STAHL 9160A



Series 9160 Ex i transmitter supply units are used for the intrinsically safe operation of 2- and 3-wire transmitters or intrinsically safe mA sources such as 4-wire transmitters. The device transmits HART signals in both directions. The range includes one- and two-channel devices, as well as a variant for signal duplication. Special versions are available for lower output voltages and SIL 3.

## Technical Data

### Explosion Protection

Application range (zones)	2
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX BVS 08.0050 X
IECEX gas explosion protection	Ex nA [ia Ga] IIC T4 Gc
IECEX dust certificate	IECEX BVS 08.0050 X
IECEX dust explosion protection	[Ex ia Da] IIIC
IECEX firedamp certificate	IECEX BVS 08.0050 X
IECEX firedamp protection	[Ex ia Ma] I
ATEX gas certificate	DMT 03 ATEX E 010 X
ATEX gas explosion protection	⊕ II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
ATEX dust certificate	DMT 03 ATEX E 010 X
ATEX dust explosion protection	⊕ II (1) D [Ex ia Da] IIIC
ATEX firedamp certificate	DMT 03 ATEX E 010 X
ATEX firedamp protection	⊕ I (M1) [Ex ia Ma] I
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, nA nC Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [Ex ia] IIC T4 Mounting vert. at Ta = 70°C , or horizontal Ta = 60°C See Doc. 91 606 01 31 1

#### Explosion Protection

Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), China (NEPSI), IECEx (BVS), Korea (KTL), SIL (exida), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Declaration of Conformity	ATEX (EUK), China (CCC)

#### Safety Data

Max. voltage $U_o$	27 V				
Max. current $I_o$	88 mA				
Max. power $P_o$	576 mW				
Max. permissible external capacity $C_o$ for I	3750 nF				
Max. permissible external inductance $L_o$ for I	40 mH				
Max. permissible external capacity $C_o$ for IIC	0.09 $\mu$ F				
Max. permissible external capacity $C_o$ for IIB	0.705 $\mu$ F				
Max. permissible external capa.IIA	2330 nF				
Max. permissible external inductance $L_o$ for IIC	2.3 mH				
Max. permissible external inductance $L_o$ for IIB	17 mH				
Max. permissible external inductance $L_o$ for IIA	28 mH				
Max. voltage $U_i$	30 V				
Max. voltage $U_o$ isolation amplifier	4.1 V				
Max. current $I_i$ note	Internally limited				
Max. power $P_i$	100 mW				
Internal capacitance	Negligible				
Internal capacitance isolation amplifier	Negligible				
Internal inductance	Negligible				
Internal inductance $L_i$ isolation amplifier	Negligible				
Safety-related max. voltage	253 V AC				
Intrinsically safe limiting values inductance $L_o$ /capacitance $C_o$	Jointly connectable inductance $L_o$ /capacitance $C_o$				
IIC	$L_o$ [mH]	2 mH	1 mH	0.500 mH	0.200 mH
	$C_o$ [ $\mu$ F]	0.042 $\mu$ F	0.056 $\mu$ F	0.072 $\mu$ F	0.090 $\mu$ F
IIB	$L_o$ [mH]	17 mH	2 mH	0.500 mH	0.200 mH
	$C_o$ [ $\mu$ F]	0.290 $\mu$ F			
IIA	$L_o$ [mH]	28.000 mH	2.000 mH	1.000 mH	0.200 mH
	$C_o$ [ $\mu$ F]	0.410 $\mu$ F	0.320 $\mu$ F	0.540 $\mu$ F	0.820 $\mu$ F
IIIC	$L_o$ [mH]	17.000 mH	2.000 mH	0.500 mH	0.200 mH
	$C_o$ [ $\mu$ F]	0.290 $\mu$ F	0.320 $\mu$ F	0.460 $\mu$ F	0.600 $\mu$ F
I	$L_o$ [mH]	40.000 mH	20.000 mH	0.500 mH	0.100 mH
	$C_o$ [ $\mu$ F]	0.480 $\mu$ F	0.660 $\mu$ F	0.810 $\mu$ F	1.200 $\mu$ F

#### Functional Safety

SIL	2
-----	---


#### Functional Safety

HFT	0
SFF	85%
Lambda SD	0 FIT
Lambda SU	0 FIT
Lambda DD	163 FIT
Lambda DU	28 FIT
PFD <sub>avg</sub> at T <sub>proof</sub> 1 year	2,29E-04
PFD <sub>avg</sub> at T <sub>proof</sub> 2 years	3,38E-04
PFD <sub>avg</sub> at T <sub>proof</sub> 5 years	6,64E-04

#### Electrical Data

Number of channels	2
Measuring transformer feed operation	Yes
Isolation amplifier operation	Yes
LFD relay	No
Communication signal	HART, 0.5 to 10 kHz

Load resistance  $R_L$

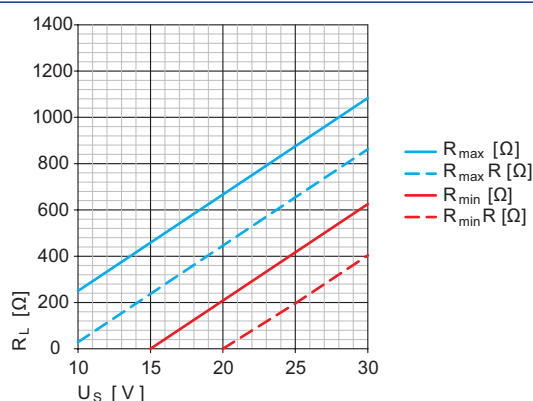

- U<sub>s</sub>: Supply voltage
- R<sub>L</sub>: Load resistance
- R<sub>max</sub>: Max. load resistance at terminals 1, 2 and 5, 6
- R<sub>min</sub>: Min. load resistance at terminals 1, 2 and 5, 6
- R<sub>maxR</sub>: Max. load resistance at terminals 1, 3 and 4, 6
- R<sub>minR</sub>: Min. load resistance at terminals 1, 3 and 4, 6

#### Auxiliary Power

Auxiliary power	24 V DC
Auxiliary power nominal voltage	24 V DC
Auxiliary power voltage range	18 to 31.2 V
Voltage range residual ripple	≤ 3,6 V <sub>SS</sub>
Nominal current	100 mA
Auxiliary power max. power dissipation	1.7 W
Power consumption	2.3 W
Polarity reversal protection	Yes
Undervoltage monitoring	Yes
Operation indication	Green "PWR" LED

#### Galvanic Isolation

Test voltage as per standard	IEC EN 60079-11
Ex i input to output	1.5 kV AC
Ex i input to auxiliary power	1.5 kV AC
Ex i input to Ex i input	500 V
Test voltage as per standard	EN 50178
Output to auxiliary power	350 V AC
Output to output	350 V AC

#### Input

Input function	Isolation amplifier Transmitter power unit
Input	0/4 ... 20 mA with HART
Input signal	0/4 to 20 mA with HART
Function range input	0 ... 24 mA
Max. input current, mA sources	50 mA
Input for open-circuit voltage $U_a$	$\leq 26$ V
Short-circuit current	$\leq 35$ mA
Ex i input supply voltage for transmitter	16 V at 20 mA (for 2-wire)
Supply voltage for transmitter	$\geq 16$ V at 20 mA
Line fault and loss of power signalisation	- Contact (30 V/100 mA), closed against earth in case of error - pac-Bus, potential-free contact (30 V/100 mA)
Input resistance	$\leq 100$ ohm

#### Output

Output	Passive with HART
Function range output	0 – 24 mA
Output A	Passive
Output B	Passive
Output voltage	$\leq 30$ V
Max. load resistance $R_L$ HART	See characteristic curve
Max. load resistance $R_L$ note	See characteristic curve
Output residual ripple	$\leq 40$ $\mu$ Aeff
Settling time 10-90%	$\leq 100$ $\mu$ s
Temperature influence error limits	$\leq 0.05\%$ / 10 K
Deviation	$\leq 0,1$ %
Behaviour of the output	= input signal
Behaviour of the output note	Accuracy, typical data expressed as % of calibrated span (20 mA) at $U_N$ , 23 °C

#### Ambient Conditions

Ambient temperature	-20 °C ... +70 °C (Single device) -20 °C ... +60 °C (Group assembly)
Ambient temperature	-4 °F ... +158 °F (Single device) -4 °F ... +140 °F (Group assembly)
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40 °F ... +176 °F
Maximum relative humidity	95%
Use at the height of	< 2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21

#### Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Grid dimension	17.6 mm
Width	17.6 mm
Width, inches	0.69 in

# Isolators

Transmitter supply unit

Ex i field circuit

9160/23-10-10k Art. No. 214904




## Mechanical Data

Height	114.5 mm
Height, inches	4.51 in
Length	128 mm
Length, inches	5.04 in
Mounting depth, inches	4.51 in
Weight	195 g
Weight	0.43 lb

## Mounting / Installation


Mounting type	DIN rail NS35/15, NS35/7.5
Mounting orientation	Horizontal Vertical
Connection type	Spring clamp terminal
Min. rigid conductor cross section	0.2 mm <sup>2</sup>
Max. rigid conductor cross section	2.5 mm <sup>2</sup>
Min. flex conductor cross section	0.2 mm <sup>2</sup>
Max. flex conductor cross section	2.5 mm <sup>2</sup>
Connection cross-section AWG	24 – 14

## Technical Drawings – Subject to Alterations

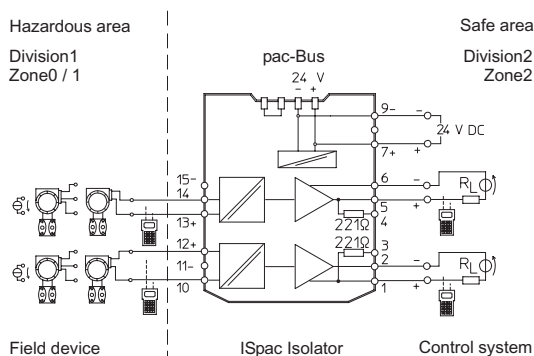

Connection diagram 9160/23-10-10

## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

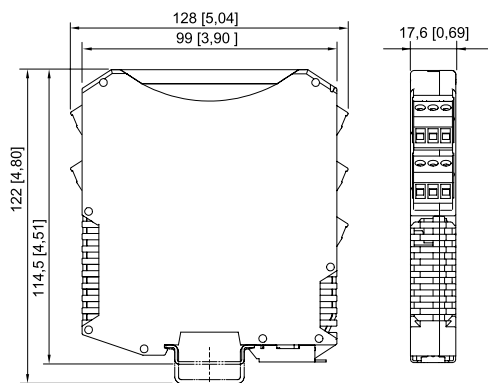

ISpac Series 9146, 9147, 9160, 9162, 9163, 9165,  
9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193,  
ISbus Series 9412 with spring clamp terminal

## Accessories

# Isolators

Transmitter supply unit

Ex i field circuit

9160/23-10-10k Art. No. 214904



## Transparent cover

Art. No.



For 91xx ISpac modules  
Yellow, transparent  
Clear identification of the device for SIL applications.  
(Packaging unit: 10 pieces)

200914

## pac-Bus

Art. No.




Wiring auxiliary power and collective error message

160731

## Terminal set for pac-Bus

Art. No.



For the supply of 24 V DC auxiliary power via terminals (alternative to using the supply module 9193/21-11-11), with jumper for error message chain for ISpac module 91xx

160730

## Spare Parts

### Screw terminal

Art. No.



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
colour: green

112817



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
colour: black

112816



3-pole plug, screw connector  
thread: M3  
stripping length: 7 mm  
colour: blue

112818

### Screw terminal with test tap

Art. No.



3-pole plug with test tap, screw connector  
thread: M3  
stripping length: 7 mm  
colour: black

113005



3-pole plug with test tap, screw connector  
thread: M3  
stripping length: 7 mm  
colour: blue

113004

### Spring clamp terminal

Art. No.



3-pole plug with test tap, spring clamp connection  
stripping length: 10 mm  
colour: green

112825



# Isolators

Transmitter supply unit

Ex i field circuit

9160/23-10-10k Art. No. 214904



	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: black	112824
	3-pole plug with test tap, spring clamp connection stripping length: 10 mm colour: blue	112826

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.