

# Installation equipment and accessories



## Cable gland

Without reduction sealing insert

8161/7-M63-4834 Art. No. 239177



- For safely running cables into Ex e and Ex i areas
- Can be used in a temperature range from -60 to +75 °C, degree of protection IP68
- Available in Ex e and Ex i versions; the Ex i version is identified by a blue cap nut
- Cable dia. ranges from 1 to 48 mm
- Versions with multi-seal inserts

MY R. STAHL 8161B



R. STAHL's Series 8161/7 and 8161/8 cable glands can be used to safely run cables into Ex e enclosures. They are suitable for cable diameters between 1 and 48 mm. They are available for Ex e and Ex i electrical circuits – the Ex i version can be distinguished by its blue cap nut. A stopping plug for unused entries can be integrated into the entries.

## Technical Data

### Explosion Protection

Ex version	Ex e
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 14.0011 X
IECEX gas explosion protection	Ex eb IIC Gb
IECEX dust certificate	IECEX PTB 14.0011 X
IECEX dust explosion protection	Ex tb IIIC Db
ATEX gas certificate	PTB 14 ATEX 1008 X
ATEX gas explosion protection	⊕ II 2 G Ex eb IIC Gb
ATEX dust certificate	PTB 14 ATEX 1008 X
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC Db
Certificates	ATEX (PTB), Brazil (ULB), IECEX (PTB), Korea (KGS)
Declaration of Conformity	ATEX (EUK)

### Ambient Conditions

Ambient temperature	-40 °C ... +75 °C
Use at the height of	< 2000 m

### Mechanical Data

Strain relief	No
Degree of protection (IP)	IP66
Degree of protection note	IP68 at 5 bar 30 min. (IP protection according to IEC/EN 60529)
Sealing material	EPDM profile seal
Sealing ring material	EPDM
Material	Polyamide
Material 2	Glass fibre reinforced
Silicone-free	Yes

## Cable gland


Without reduction sealing insert

8161/7-M63-4834 Art. No. 239177

### Mechanical Data

Self-extinguishing	Yes
Flame-retardant	Yes
Halogen-free	Yes
Surface resistance	$\leq 10^{13} \Omega$
Clamping range	34-48 mm
Armouring type	Unarmoured cable types
Clamping range	34 ... 48 mm
Total length	64 to 78 mm
Dimension d1	75 mm
Dimension d2	48.3 mm
Dimension d4	53 mm
Width across corners	75 mm
Width across flats	68 mm
Thread size	M63
Thread length	15 mm
Thread pitch	1,5 mm
Impact strength (IEC 60079)	7 J
Impact strength	7 J
Colour	Black
Lot size	1
Weight	155 g
Weight	0.34 lb

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

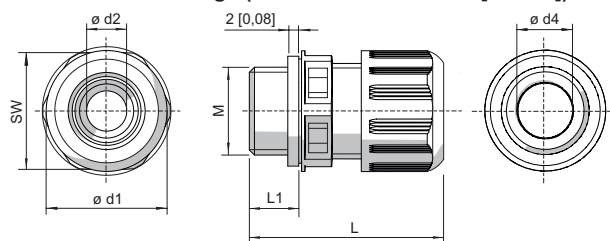

M = Thread size  
 SW = Width across flats  
 L1 = Thread length  
 L = Total length

### Cable glands without bend protection

Thread size	Width across flats	Total length	Total length (with long thread)	Thread length	Thread length (long thread)	Clamping range	Clamping range + reduction sealing insert	Dimension d1	Dimension d2	Dimension d4
M12	16.00 mm	29 to 34 mm	35 to 40 mm	9 mm	15 mm	3-6 mm	1-6 mm	18 mm	7.3 mm	6.3 mm
M16	20.00 mm	31 to 37 mm	37 to 43 mm	9 mm	15 mm	5-9 mm	2-9 mm	22 mm	10.3 mm	9.3 mm
M20	24.00 mm	36 to 43 mm	41 to 48 mm	10 mm	15 mm	7-13 mm	4-13 mm	27 mm	13.3 mm	13.3 mm
M25	29.00 mm	38 to 46 mm	43 to 51 mm	10 mm	15 mm	10-17 mm	7-17 mm	32 mm	17.3 mm	17.3 mm

# Installation equipment and accessories



## Cable gland

Without reduction sealing insert

8161/7-M63-4834 Art. No. 239177

M32	36.00 mm	42 to 50 mm	45 to 53 mm	12 mm	15 mm	13-21 mm	9-21 mm	40 mm	21.3 mm	21.3 mm
M40	46.00 mm	52 to 65 mm	58 to 71 mm	12 mm	18 mm	17-28 mm	12-28 mm	51 mm	28.3 mm	30 mm
M50	55.00 mm	59 to 72 mm	63 to 76 mm	14 mm	18 mm	23-35 mm	16-35 mm	61 mm	35.3 mm	40 mm
M63	68.00 mm	64 to 78 mm	67 to 81 mm	15 mm	18 mm	34-48 mm	28-48 mm	75 mm	48.3 mm	53 mm

## Accessories

### Jam nut, nickel-plated brass

Art. No.



Material: Nickel-plated brass Lot size: 10  
Thread size: M63

241565

### Jam nut, plastic (-40 to +75 °C)

For mounting the cable entries in through holes

Art. No.




Material: Polyamide Lot size: 10  
Thread size: M63

239467

### Reduction sealing insert, silicone (-60 to +75 °C)

For low temperatures

Art. No.



Connection thread: M63 x 1.5 Lot size: 10  
Cable dia. range: 28 to 38 mm


239459

### Plug (-60 to +75 °C; depending on the cable gland used)

For sealing unused cable glands

Material: Polyamide

Art. No.



Diameter: 35 mm Lot size: 10

240060

Diameter: 48 mm Lot size: 10


240062

## Spare Parts

### Flat seal (standard), EPDM (-40 to +75 °C)

Replacement seals for cable glands

Art. No.



For cable glands 8161/-M63-48 Lot size: 100  
Connection thread: M63

222376

For cable glands 8161/-M63-48 Lot size: 50  
Connection thread: M63

222369

# Installation equipment and accessories



Cable gland


Without reduction sealing insert

8161/7-M63-4834 Art. No. 239177

**Silicone flat seal (-60 to +75 °C)**

**Replacement seals for low temperatures**

**Art. No.**



For cable glands 8161/.-M63-48 Lot size: 100  
Connection thread: M63

240254

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.