


CMP-63sE1FW Art. No. 246446



- Ex d and Ex e cable glands for cables with SWA
- Prevention of cold flow
- Internationally certified in accordance with IECEx, ATEX and cCSAus, EMC-tested

MY R. STAHL E1FWA

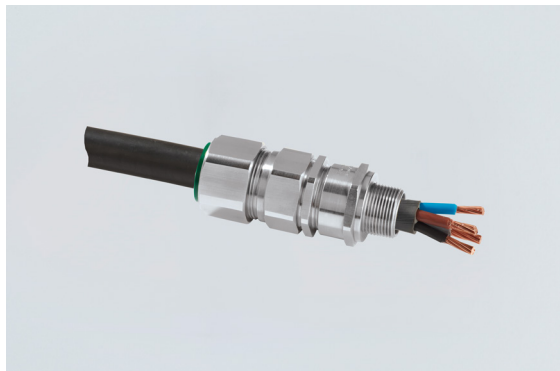

The Series E1FW metal Ex d and Ex e cable glands are suitable for special types of armoured cables: For SWA and tape armouring made of steel and aluminium. They have a special holder for the armouring and various seals. They are also designed to prevent cold flow and are EMC-tested.

Technical Data

Explosion Protection

Ex version	Ex e & Ex d & Ex nR & Ex ta
Application range (zones)	1, 2, 20, 21, 22
IECEX gas certificate	IECEX CML 18.0181X
IECEX gas explosion protection	Ex db eb IIC Gb
IECEX dust certificate	IECEX CML 18.0181X
IECEX dust explosion protection	Ex ta IIIC Da
IECEX firedamp protection	Ex db I Mb
IECEX firedamp protection 2	Ex eb I Mb
IECEX restricted breathing certificate	IECEX CML 18.0181X
IECEX restricted breathing	Ex nR IIC Gc
ATEX gas certificate 2	CML18ATEX4316X
ATEX gas explosion protection	⊕ II 2 G Ex db eb IIC Gb
ATEX dust explosion protection	⊕ II 1 D Ex ta IIIC Da
ATEX firedamp protection	⊕ I M2 Ex db I Mb
ATEX firedamp protection 2	⊕ I M2 Ex eb I Mb
ATEX restricted breathing certificate	CML18ATEX1324X
ATEX restricted breathing	⊕ II 3 G Ex nR IIC Gc
Notes	The product certificates can be downloaded from the manufacturer's homepage (www.cmp-products.com)

Ambient Conditions

Ambient temperature	-60 °C ... +130 °C
---------------------	--------------------

Mechanical Data


Version	63s
Strain relief	No
Degree of protection (IP)	IP66
Degree of protection note	IP67 and IP68 mounting according to the specifications of the manufacturer, CMP
Sealing material	SOLO LSF
Material	Nickel-plated brass

CMP-63sE1FW Art. No. 246446

Mechanical Data

Silicone-free	Yes
Clamping range	45.6 – 59.4 mm
Armouring type	Single-wire armouring
Armouring type 2	Without lead sheath
Min. armour wire thickness	2 mm
Max. armour wire thickness	2.5 mm
Clamping range	45.6 ... 59.4 mm
Construction type	BS 6121, IEC/EN 62444
Width across corners	82.5 mm
Width across flats	75 mm
Thread size	NPT2
Thread length	26.9 mm
Thread pitch	11,5 TPI
Thread standard	NPT
Gland size	63s
Stepped cone	2 ... 2.5 mm
Inner sheath	40.1 ... 49.9 mm
Outer sheath	45.6 ... 59.4 mm
Protrusion length	102 mm
Impact strength	20 J
PVC boot	PVC23
Lot size	1
Weight	1.34 kg
Weight	2.95 lb

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



- A = Inner sheath
- B = Outer sheath
- C = Thread size
- D = Width across corners
- D = Width across flats
- E = Thread length
- F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.