

Operating and monitoring systems

Thin Client SERIES 500

Device platform MANTA

OS MT-567-SX



- Thin Client Operator Station, 22" display, 1680 x 1050
- Zone 2, 22, stainless steel enclosure IP66, optional acc. to GMP
- Display of the 19" (1280 x 1024) resolution true to 5:4 format
- Optional resistive glass or foil touch screen
- Data transmission as 1000Base-SX via multi-mode fibre optic up to 550 m and as 10/100Base-TX via CAT7 up to 100 m

WebCode **MT567A**




The OS MT-567 HMI series consists of Thin Client Operator Stations for hazardous zones 2 and 22. Their brilliant 22" widescreen displays with a resolution of 1680 x 1050 pixels (format 16:10), are available with or without touch screen. The stainless steel enclosures (SS304 or SS316L) are available with a front opening or in cleanroom-compliant design and with different mounting options. Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data is transmitted as 1000Base-SX via multi-mode fibre optic up to 550 m, as 10/100Base-TX via CAT7 up to 100 m or simultaneously via both interfaces.

THIN CLIENT INTEGRATION

PC WORKSTATIONS

VIRTUALIZED SERVERS AND WORKSTATIONS

AUTOMATION IN THE CLOUD

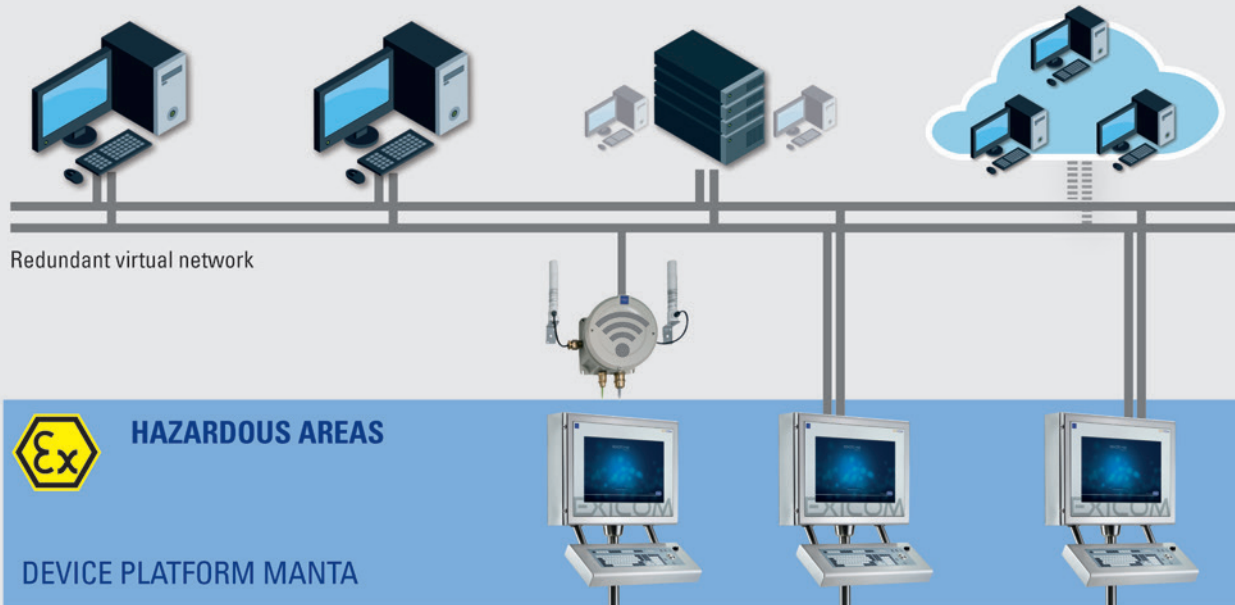

Operating and monitoring systems

Thin Client SERIES 500

Device platform MANTA

OS MT-567-SX



Technical Data

General

| | |
|---------------------|---|
| Series | Operator Station OS MT-567 (discontinued) |
| Product description | 22" Thin Client |
| Technology | Remote HMI Thin Client |
| HMI type | Operator Station |
| WebCode | MT567A |

Explosion Protection

| | |
|---------------------------------|---|
| Application range (zones) | 2 22 |
| Certifications | ATEX, IECEx, EAC, CNEX |
| IECEx certification | IECEx BVS 14.0034X |
| ATEX certification | BVS 12 ATEX E 033 X |
| CNEX certification | CNEX14.2205X |
| Notice certification | The certificates and explosion protection markings apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these. |
| IECEx gas explosion protection | Ex nA nR [ja op is Ga] IIC T4 Gc |
| IECEx dust explosion protection | Ex tc IIIC [ja op is Da] IP66 T110°C Dc |
| ATEX gas explosion protection | II 3(1) G Ex nA nR [ja op is Ga] IIC T4 Gc |
| ATEX dust explosion protection | II 3(1) D Ex tc IIIC [ja op is Da] IP66 T110°C Dc |
| CNEX gas explosion protection | Ex nA nR [ja op is Ga] IIC T4 Gc |
| CNEX dust explosion protection | Ex tc IIIC [ja op is Da] IP66 T110°C Dc |

Electrical Data

| | |
|------------------------------|--|
| Rated operational voltage DC | 24 V |
| Voltage range DC | 20 – 30 V |
| Rated operational voltage AC | 230 V |
| Voltage range AC | 100 – 240 V |
| Power consumption DC | 3 A |
| Power consumption AC 1 | 1 A |
| Protection fuse DC | 5 AT |
| Protection fuse AC | 5 AT |
| Rated operational power | typ. 50 W / 100 W at O30 / max. 150 W (typ. 170 BTU / 341 BTU at O30 / max. 510 BTU) |
| Processor type | ATOM E3845 |
| Processor details | Intel Bay Trail (BT); 1.91 GHz; quad core |
| RAM | 4 GB |
| Data memory | 64 GB SLC 128 GB MLC |
| Graphics controller | integrated Intel Gen. 7 HD Graphics |
| Memory technology | SSD solid state flash drive M.2 |
| Operating system | Windows 10 IoT Enterprise |
| Language support | via operating system |
| Image | Remote Firmware |
| Ethernet / Data | 1x 1000Base-SX (Ex op is) 1x 10/100Base-TX (Ex nA) |
| Data cable | SX: 50/125 µm FO cable TX: CAT7 installation cable AWG23 |

Operating and monitoring systems

Thin Client SERIES 500

Device platform MANTA

OS MT-567-SX



Electrical Data

| | |
|-----------------------------------|---|
| Data cable length | SX: max. 550 m, for 50 µm FO cable TX: max. 100 m |
| Interface medium | SX: Multi-mode optical fibre cable TX: CAT7 data transmission |
| Frequency range | 50 – 60 Hz |
| Interface USB | 2 x USB (Ex ia) 1 x USB (Ex nA) 2 x USB (Ex ia) (keyboard, pointing device) |
| Interface serial | 1 x RS-232 (Ex nA) |
| Interface audio | 1 x Audio line out (Ex nA) |
| WLAN | optional via USB |
| Connection compartment | Power supply direct in integrated connection box |
| Connections | via spring clamp terminals, green |
| Voltage output | 12 V DC, max. 500 mA |
| Wiring | flexible cable up to 2.5 mm ² (AWG14) fixed cable up to 4 mm ² (AWG12) |
| Plug version FO | LC duplex connector |
| Max. input voltage U _m | 250 VAC |
| Audio sound | optional: Audio amplifier (mono amplifier) 3.5 W, for 2x loudspeaker connection (Ex nA) |
| Real-time clock | Yes |
| Real-time clock data buffer | Lithium battery and capacitor buffered, maintenance-free |
| Battery buffered | > 5 years |
| Capacitor buffered | at least 4 days |

Display

| | |
|------------------------------------|---|
| Display version | TFT Colour display |
| Display version 2 | 16.7 million colours |
| Display size inch | 22 |
| Display size centimetres | 56 |
| Display resolution | WSXGA+ |
| Total pixels | 1680 x 1050 |
| Display dimensions | 16:10 |
| Display brightness | 250 cd/m ² |
| Display contrast | 1000:1 |
| Display viewing angle horizontal | 178° at CR ≥5 |
| Display viewing angle vertical | 170° at CR ≥5 |
| Display | Glass |
| Touchscreen | optional, resistive |
| Touchscreen technology | 5-wire glass or membrane touch |
| Touchscreen activation | Foil touch: low activation pressure (0.1 up to max. 1 N) Glass touch: medium activation pressure (1.8 up to max. 2.5 N) |
| Touchscreen input method | Finger, gloved finger or stylus |
| Touchscreen durability | Foil touch: Polyester foil is easily scratched, with high pressure force the spacer dots could be damaged. Glass touch: Quite good, but with high pressure force the spacer dots could be damaged. |
| Touch screen scratch hardness MoHS | Foil touch: - Glass touch: >5 |

Operating and monitoring systems

Thin Client SERIES 500

Device platform MANTA

OS MT-567-SX

STAHL

Display

| | |
|---|--|
| Touchscreen scratch hardness pencil test ISO15184 | Foil touch: 3H Glass touch: 9H |
| Touchscreen transmissivity / optic | Foil touch: small milky effect due to the foil Glass touch: very good |
| Touchscreen surface contaminants | unaffected |
| Touchscreen abrasive resistance | 36 million times with a silicone rubber of R8 finger, hitting rate 250 g at 2 times per second |
| Backlight | LED Technology |
| Backlight service life | 50 000 h at +20 °C |
| Front plate (display) | Aluminium |

Ambient Conditions

| | |
|---------------------------------|--|
| Ambient temperature operation | -20 °C ... +55 °C |
| Ambient temperature operation 1 | -30 °C ... +55 °C with heater version O30 |
| Storage temperature | -30 °C ... +70 °C |
| Cold start temperature | -10 °C |
| Temperature note 1 | The O30 version is only available for the AC version devices ! |
| Temperature note 2 | Operating temperature +55 °C for a maximum of 5 h, for constant operation (24/7) +50 °C. |
| Temperature note 3 | Cold start temperature: If the HMI device is switched on at a temperature below -10 °C the display will need a certain amount of time to warm up until everything is clearly visible. Depending on how low the temperature is, this process may last up to 3 hours. |
| Temperature note general | The temperature details apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these. |
| Heat dissipation | about 40 % via the front plate and 60 % via the enclosure |
| Relative humidity | 10 to 90 % at +40 °C, non-condensing |
| Damp heat cyclic | +55 °C (±2 °C) ≥95 % (only device with glass touch (TG)) |
| Dry heat | +65 °C |
| Vibration sinus | 5 to 13.2 Hz: ±1 mm 13.2 to 100 Hz: ±0.7 g Change cycle 1 oct/min Axis X, Y, Z |
| Vibration sinus 1 | 71.7 to 79.2 Hz: ±0.7 g 120 min. Change cycle 1 oct/min Axis X |
| Vibration sinus 2 | 30 Hz: ±0.7 g 90 min. Change cycle 1 oct/min Axis Y, Z |

Mechanical Data

| | |
|--------------------|--|
| Dimensions (WxHxD) | 740 mm x 872 mm x 400 mm |
| Weight | 48.5 kg |
| Material front | Aluminium / stainless steel |
| Material back | Stainless steel |
| Ingress protection | IP66 |
| Breather | optional |
| Keyboard note | With a keyboard with trackball, the operator station's ingress protection is reduced to IP54, when the trackball is moved. |

Operating and monitoring systems

Thin Client SERIES 500

Device platform MANTA

OS MT-567-SX



Mechanical Data

| | |
|----------------------|--|
| Mechanical data note | The mechanical data apply to an FR enclosure with display and keyboard. Other enclosure types as well as any additional built-in or added components may have an impact on / change these. |
|----------------------|--|

Mounting / Installation

| | |
|-----------------|---|
| Enclosure type | Stainless steel enclosure (FR) optional clean room (CFR) |
| Mounting option | Wall, elbow, stand |

Components

| | |
|----------|---|
| Keyboard | optional, 107 keys with trackball / joystick / mouse / touchpad (Ex ia) |
|----------|---|

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.