

Lighting

Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-2220-22-8500 Art. No. 326116



- Highly resistant industrial design
- Can be used as a humid luminaire and in environments with high mechanical loads
- Linear luminaire with long-life, efficient LED technology (up to 138 lm/W)
- Optionally available with DALI interface or address module for use with a central battery system
- Very lightweight and robust, with an impact strength rating of IK10
- Easy to install and easy to maintain thanks to the central lock

MY R. STAHL L402A

The EXLUX L402/4 luminaire is designed for industrial use and can be fitted to the ceiling, a pole, or alternatively, it can be suspended. A bright light for not much energy is what you get with this efficient LED technology, which offers the added benefit of increased service life – this can be as much as 100,000 hours. The plastic enclosure is easily to open by a central lock.

Technical Data

Explosion Protection	
Ex version	Industrial design
Declaration of conformity	ATEX (EUK)
Electrical Data	
AC rated operational voltage	220 ... 240 V
DC rated operational voltage	200 ... 250 V
Frequency	50 ... 60 Hz
Control gear service life	C10 ≥ 100 h, Ta ≤ 50 °C
LED service life	L90B50 ≥ 100 h
Lighting Data	
Number of lamps	1
Lamp wattage	49 W
Lamp	LED
Light colour	5000 K – neutral white
Light distribution	120°x120° with diffusing glass
Luminaire efficacy	163 lm/W
Luminous flux	7920 lm
Colour rendering	≥ 80
Colour temperature	5000 K
Ambient Conditions	
Ambient temperature	-20 °C ... 55 °C (Through wiring max. 3x16 A) -20 °C ... 60 °C (Through wiring max. 3x10 A)
Mechanical Data	
Version	Standard
IP degree of protection (IEC 60598)	IP66
Class	I (with inner PE connection)
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Light grey (RAL 7035)

Lighting

Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-2220-22-8500 Art. No. 326116




Mechanical Data

Insert nut material	Brass
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3
Max. solid connection terminals	6 mm ²
Max. finely stranded connection terminals	4 mm ²
Type of connection cable	Solid Stranded
Size	6
Width	184 mm
Height	125 mm
Length	1610 mm
Impact strength (IEC 62262)	IK10
Disconnection of the luminaire	No
Weight	7 kg
Weight	15.43 lb

Components

Threaded plate	2x SS430 stainless steel
Ballast	VG Luxtronic 80 W 350 mA
Through wiring	With 5 conductors 2.5 mm ²
Drilled holes	3 x M20
Cable glands and entries	can be ordered as an accessory
Stopping plugs	Can be ordered as accessories
Accessories	Installed

Light Distribution Curves

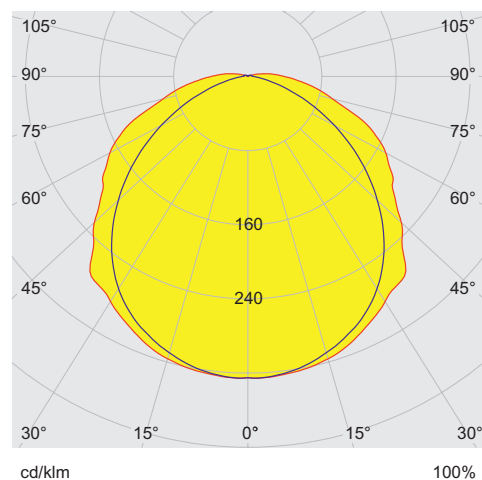

— C0 - C180 — C90 - C270
typical with diffusor, clear translucent cover

Lighting


Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-2220-22-8500 Art. No. 326116



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

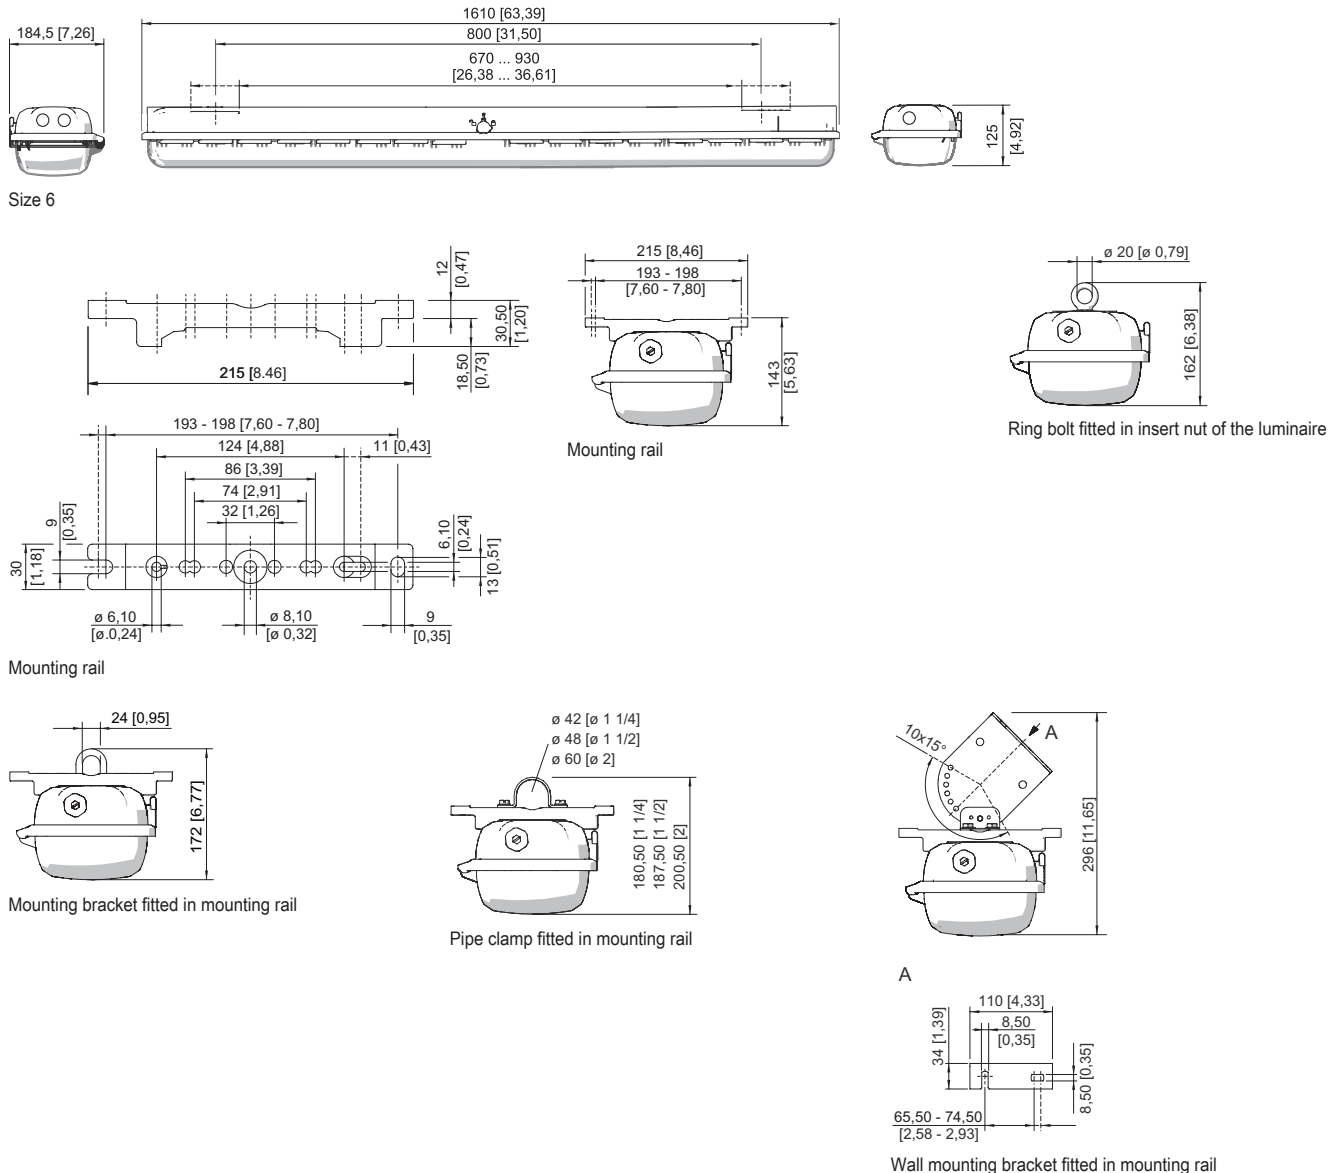

Accessories

Adapter plate for mounting EXLUX 6002 on EXLUX 6000 mounting interfaces		Art. No.
	Adapter plate for installation of EXLUX 6002 luminaires onto EXLUX 6000 interfaces	240653
Protection against accidental contact		Art. No.
	The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.	283153










Lighting

Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-2220-22-8500 Art. No. 326116



Fall protection		Art. No.
	Accessories for mounting an arrester cable	295927
Holder for translucent cover		Art. No.
	The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened.	226791
Breather		Art. No.
	Thread: M25 x 1.5 (20 pieces); without jam nut	285780
	M25 x 1.5 in order to avoid condensate formation	115738
	Thread: M20 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	323702
	Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	296608
Mounting bracket		Art. No.
	mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair	222456
Mounting rail		Art. No.
	Mounting accessories for ceiling mounting of EXLUX luminaires with V4A metal insert for reinforcement	325835
	Mounting accessories for ceiling mounting of EXLUX luminaires with V4A metal insert and captive M8 nut	329336
	for a variable mounting distance; 1 pair	222826
Ring bolt		Art. No.
	M8, direct mounting in insert nuts; 1 pair	115736
Pipe clamp		Art. No.
	R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair	222459
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460

Lighting


Linear luminaire With LED

GRP industrial design

L402/4368-6200-152-2220-22-8500 Art. No. 326116



Box spanner




M8 / A/F 13;
For actuating the central lock

Art. No.

222430

Ceiling and wall mounting bracket



mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair

Art. No.

222827

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.