


Isolators

Loop-powered binary output

Ex i field circuit

9276/10-24-48-00s Art. No. 261442

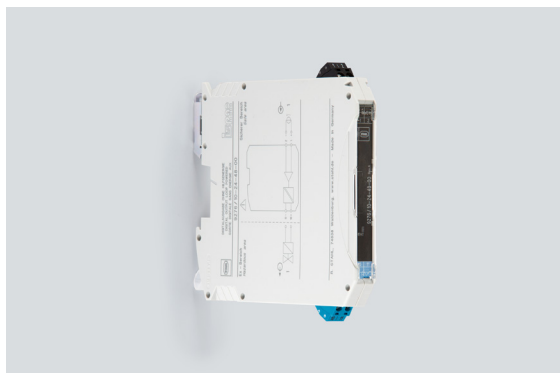

- An extensive portfolio for a wide variety of solenoid valves
- Slim design saves space – just 12.5 mm wide
- For use up to SIL 3 (IEC/EN 61508)

MY R. STAHL 9276A



The Series 9276 binary outputs transmit signals for the intrinsically safe operation of Ex i solenoid valves, indicator lamps and horns. The devices do not require a separate auxiliary power supply as they are powered by the control circuit. The intrinsically safe outputs are galvanically separated from the inputs.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEEx gas certificate	IECEEx IBE 17.0045X
IECEEx gas explosion protection	Ex ec [ia Ga] IIC T4 Gc
IECEEx dust certificate	IECEEx IBE 17.0045X
IECEEx dust explosion protection	[Ex ia Da] IIIC
IECEX firedamp certificate	IECEEx IBE 17.0045X
IECEX firedamp protection	[Ex ia Ma] I
ATEX gas certificate	IBExU 17 ATEX 1153 X
ATEX gas explosion protection	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
ATEX dust certificate	IBExU 17 ATEX 1153 X
ATEX dust explosion protection	II (1) D [Ex ia Da] IIIC
ATEX firedamp certificate	IBExU 17 ATEX 1153 X
ATEX firedamp protection	I (M1) [Ex ia Ma] I
cULus certificate	E81680
Marking cULus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, IIC T4 any mounting pos. Ta = 60°C See Doc. 9276 6 031 001 3
Certificates	ATEX (IBE), Canada (UL), China (CQM), IECEEx (IBE), Korea (KTL), SIL (exida), USA (UL)
Ship approval	DNV
Declaration of conformity	ATEX (EUK), China (CCC)

Safety Data

Max. voltage U _o	27.7 V
-----------------------------	--------

Safety Data

Max. current I _o (Ex ia)	101 mA					
Max. power P _o	697 mW					
Max. permissible external capacity C _o for IIC	0.085 µF					
Max. permissible external inductance L _o for IIC	4 mH					
Max. permissible external capacity C _o for IIB	0.663 µF					
Max. permissible external inductance L _o for IIB	17 mH					
Max. permissible external capa.IIA	2.2 µF					
Max. permissible external inductance L _o for IIA	35 mH					
Max. perm. ext. capacit. IIIC	0.663 µF					
Max. permis. ext. induct. IIIC	17 mH					
Max. permissible ext. capac. I	2.2 µF					
Max. permissible external inductance L _o for I	35 mH					
Internal capacitance	Negligible					
Internal inductance	Negligible					
Safety-related max. voltage	253 V AC					
Intrinsically safe limiting values inductance L _o /capacitance C _o	Jointly connectable inductance L _o /capacitance C _o					
IIC	L _o [mH]	20 mH	10 mH	5 mH	1 mH	0.100 mH
	C _o [µF]	0.068 µF	0.068 µF	0.068 µF	0.079 µF	0.108 µF
IIB	L _o [mH]	10 mH	5 mH	1 mH	0.100 mH	
	C _o [µF]	0.250 µF	0.250 µF	0.350 µF	0.663 µF	
IIA	L _o [mH]	20 mH	5 mH	1 mH	0.100 mH	
	C _o [µF]	0.440 µF	0.440 µF	0.680 µF	0.960 µF	
IIIC	L _o [mH]	10 mH	5 mH	1 mH	0.100 mH	
	C _o [µF]	0.250 µF	0.250 µF	0.350 µF	0.663 µF	
I	L _o [mH]	20 mH	5 mH	1 mH	0.100 mH	
	C _o [µF]	0.440 µF	0.440 µF	0.680 µF	0.960 µF	

Functional Safety

SIL	3
HFT	0
SFF	100%
Lambda SD	0 FIT
Lambda SU	50 FIT
Lambda DD	0 FIT
Lambda DU	0 FIT

Electrical Data

Number of channels	1
--------------------	---

Auxiliary Power

Auxiliary power	without
Max. power dissipation	1.41 W

Auxiliary Power

Polarity reversal protection	Yes
------------------------------	-----

Galvanic Isolation

Test voltage as per standard	EN IEC 60079-11
Ex i OFF to ON galv. sep.	375 V AC peak value

Input

Input voltage for ON	15 – 30 V
Input voltage for OFF	0 – 5 V

Output

Output open-circuit voltage U_a	24 V
Max. output current $I_{a \max}$	48 mA
Output internal resistance R_i	275.5 Ω
$I_{off \max}$	0 mA
Switching delay ON/OFF	≤ 20 ms
Switching delay OFF/ON	≤ 20 ms
Response time output	20 ms
Switching state indication	Yellow "STAT"; LED

Ambient Conditions

Ambient temperature	-40 °C ... +60 °C
Ambient temperature	-40 °F ... +140 °F
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40 °F ... +176 °F
Maximum relative humidity	10 to 95%
Use at the height of	< 2000 m
Electromagnetic compatibility	EN 61326-1 For use in industrial areas Immunity according to EN 61000-6-2 Interference radiation according to EN 61000-6-4

Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Min. rigid conductor cross section	0.2 mm ²
Max. rigid conductor cross section	2.5 mm ²
Min. flexible conductor cross section	0.2 mm ²
Max. flexible conductor cross section	2.5 mm ²
Width	12.5 mm
Width	12.5 mm
Width, inches	0.49 in
Height	114.5 mm
Height	114.5 mm
Height in inches	4.51 in
Length	112.5 mm
Length in inches	4.43 in
Weight	165 g
Weight	0.36 lb

Isolators





Loop-powered binary output
Ex i field circuit
9276/10-24-48-00s Art. No. 261442

Mounting / Installation


Mounting type	DIN rail NS35/15, NS35/7.5
Grid dimension	12.5 mm
Mounting orientation	Vertical Horizontal
Connection type	Screw terminal
Connection cross-section AWG	24 ... 14

Technical Drawings – Subject to Alterations

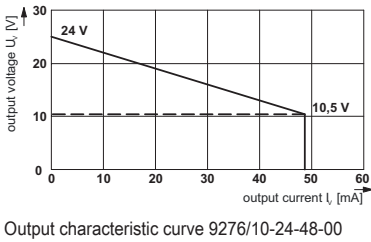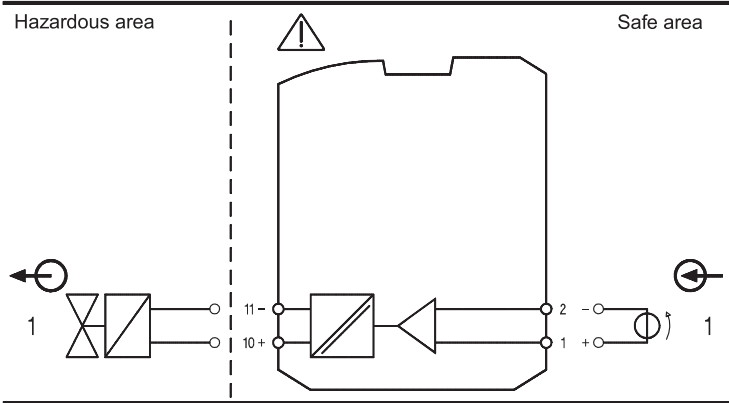

9276/10-21-25-00 connection diagram

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

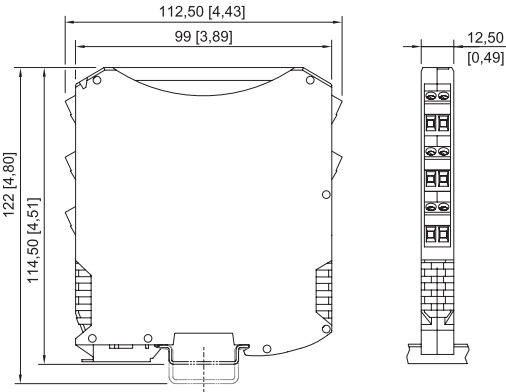

ISpac Series 9260, 9265, 9270, 9275, 9276, 9282
with screw terminal

Accessories

Ex i/Ex e relay module for Zone 1

Art. No.

	The Ex i/Ex e relay module is used for the galvanically isolated switching of intrinsically safe (Ex i) and non-Ex i (Ex e) electrical circuits. Coil circuit: Ex i or non-Ex i (Ex e) Contact circuit: Ex i or non-Ex i (Ex e) Thanks to the integrated safeguarding for the contact and coil circuit, additional safeguarding is not necessary. Usable with the following ISpac isolators: 9175/10-16-11, 9175/20-16-11, 9176/20-15-00, 9176/10-16-00, 9176/20-16-00, 9275/10-24-48-11, 9276/10-21-60-00, 9276/10-24-48-00 Usable with the following IS1+ modules: 9475/32-04-22, 9475/32-08-62, 9475/33-08-60	273000
--	--	--------

Isolators



Loop-powered binary output

Ex i field circuit

9276/10-24-48-00s Art. No. 261442

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.