

8162C9-NPT3/4-2 Art. No. 271274



- Improves safety by preventing condensation from building up in enclosures
- Continuous pressure equalisation between the enclosure and the environment
- Ex e type of protection (increased safety), max. degree of protection IP54

MY R. STAHL 8162B



R. STAHL's Series 8162 breathers ensure continuous pressure equalisation between the inside of the enclosure and the surrounding environment. This ventilation prevents moisture from entering the enclosure via the seals and condensing inside the enclosure. The breathers are made of moulded material and meet the requirements of degrees of protection up to IP54.

Technical Data

Explosion Protection

Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 06.0028
IECEX gas explosion protection	Ex eb IIC Gb
IECEX dust certificate	IECEX PTB 06.0028
IECEX dust explosion protection	Ex tb IIIC Db
ATEX gas explosion protection	⊕ II 2 G Ex eb IIC Gb
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC Db
Certificates	USA (FM), USA (UL)

Ambient Conditions


Ambient temperature	-40 °C ... +70 °C
---------------------	-------------------

Mechanical Data

Degree of protection (IP)	IP54
Material	Polyamide, Glass fibre reinforced
Silicone-free	Yes
Width across corners	32.5 mm
Thread size	NPT3/4
Thread pitch	14 TPI
Nuts available	Without nut
Packaging unit	100
Weight	1.31 kg
Weight	2.88 lb

8162C9-NPT3/4-2 Art. No. 271274

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

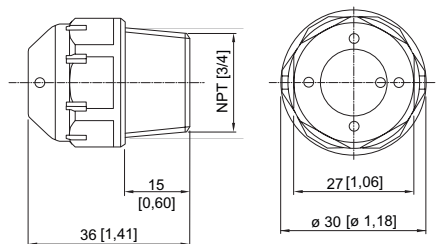

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.