



- The latest LED technology with a high luminous efficacy and a long service life
- Extremely high luminaire efficacy
- Variants with 90 minutes or 180 minutes emergency lighting duration available
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the luminaire
- Automatic weekly function test and annual rated operating time test

MY R. STAHL 6409C



The emergency luminaire with Series 6409/4 LED with integrated battery can be installed in stand-by switching, continuous mode or in switchable stand-by switching. A weekly functional test and annual rated operating time test are performed automatically. The results are indicated by an LED.

Technical Data

Explosion Protection

Ex version	Yes
Application range (zones)	2, 21, 22
IECEX gas certificate	IECEX IBE 16.0047
IECEX gas explosion protection	Ex db ec IIC T4 Gc
IECEX dust certificate	IECEX IBE 16.0047
IECEX dust explosion protection	Ex tb op is IIIC T100 °C Db Ex tc IIIC T100 °C Dc
ATEX gas certificate	IBExU 16 ATEX 1233
ATEX gas explosion protection	⊕ II 3 G Ex db ec IIC T4 Gc
ATEX dust certificate	IBExU 16 ATEX 1233
ATEX dust explosion protection	⊕ II 2 D Ex tb op is IIIC T100 °C Db ⊕ II 3 D Ex tc IIIC T100 °C Dc
Certificates and approvals	ATEX IECEX
Certificates	ATEX (IBE), IECEX (IBE)
Declaration of conformity	ATEX (EUK)

Electrical Data

AC rated operational voltage	110 ... 240 V
Frequency	50 ... 60 Hz
Battery version	NiCd battery, gas-tight
Battery operating voltage	6 V
Battery capacity	7 Ah
Self-test function	With (standard)
Control gear service life	C10 ≥ 100 h, Ta ≤ 60 °C
LED service life	L90B50 ≥ 100 h

Lighting Data

Number of lamps	1
Lamp wattage	21 W

Lighting

Emergency luminaire With LED

GRP

6409/4128-5101-162-2220-22-850011 Art. No. 272447



Lighting Data

Lamp	LED
Light colour	5000 K – neutral white
Light distribution	120°x120° with diffusing glass
Luminaire efficacy	141 lm/W
Luminous flux	2890 lm
Operating time	1.5h emergency lighting operation
Emergency light output	65% – 1.5 h
Colour rendering	≥ 80

Ambient Conditions

Ambient temperature	-30 °C ... 50 °C (Through wiring max. 3x16 A) -30 °C ... 55 °C (Through wiring max. 3x10 A)
Ambient temperature	-22 °F ... 122 °F (Through wiring max. 3x16 A) -22 °F ... 131 °F (Through wiring max. 3x10 A)

Mechanical Data

Version	Standard
IP degree of protection (IEC 60598)	IP66/IP67
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Light grey (RAL 7035)
Insert nut material	Brass
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3 + L´
Max. solid connection terminals	6 mm ²
Max. finely stranded connection terminals	4 mm ²
Type of connection cable	Finely stranded Solid
Size	2
Width	183.5 mm
Height	125 mm
Length	857 mm
Impact strength (IEC 62262)	IK10
Disconnection of the luminaire	Only battery
Weight	5.4 kg
Weight	11.9 lb

Components

Threaded plate	2x SS430 stainless steel
Ballast	LED NLE 80W 110-240V/7Ah/1.5h/
Through wiring	With 6 conductors 2.5 mm ²
Drilled holes	3 x M20
Cable glands and entries	can be ordered as an accessory
Stopping plugs	Can be ordered as accessories
Accessories	without

Lighting






Emergency luminaire With LED

GRP

6409/4128-5101-162-2220-22-850011 Art. No. 272447



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

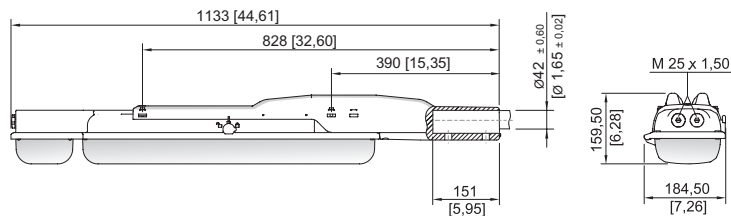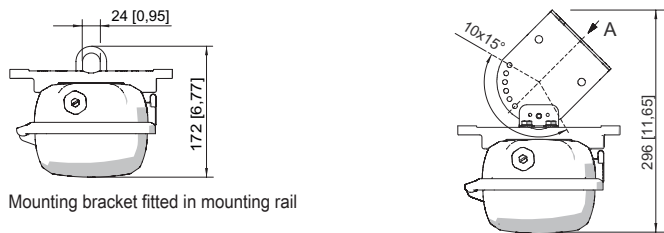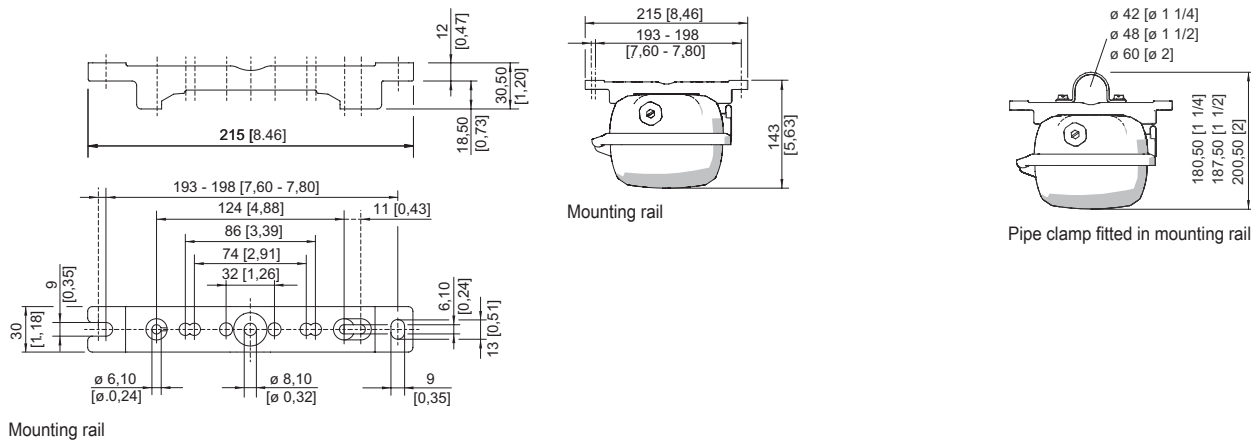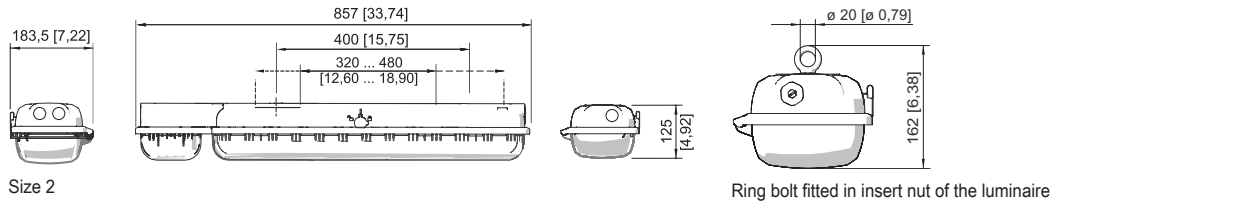

Accessories

Adapter plate for mounting EXLUX 6002 on EXLUX 6000 mounting interfaces

Art. No.

	<p>Adapter plate for installation of EXLUX 6002 luminaires onto EXLUX 6000 interfaces</p>	<p>240653</p>
--	---	---------------










Lighting

Emergency luminaire With LED

GRP

6409/4128-5101-162-2220-22-850011 Art. No. 272447



Breather		Art. No.
	Thread: M25 x 1.5 (20 pieces); without jam nut	285780
	Thread: M20 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	323702
	Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut	296608
	M25 x 1.5 in order to avoid condensate formation	115738
Fall protection		Art. No.
	Accessories for mounting an arrester cable	295927
Holder for translucent cover		Art. No.
	The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened.	226791
Mounting rail		Art. No.
	Mounting accessories for ceiling mounting of EXLUX luminaires with V4A metal insert for reinforcement	325835
	Mounting accessories for ceiling mounting of EXLUX luminaires with V4A metal insert and captive M8 nut	329336
Pole mounting sleeve		Art. No.
	for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)	227512
Protection against accidental contact		Art. No.
	The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.	283153
Box spanner		Art. No.
	M8 / A/F 13; For actuating the central lock	222430

Lighting


Emergency luminaire With LED

GRP


6409/4128-5101-162-2220-22-850011 Art. No. 272447




Mounting rail

	for a variable mounting distance; 1 pair	Art. No. 222826
--	--	--------------------


Mounting bracket

	mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair	Art. No. 222456
--	--	--------------------


Pipe clamp

	R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair	Art. No. 222459
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460

Ring bolt


	M8, direct mounting in insert nuts; 1 pair	Art. No. 115736
---	--	--------------------

Ceiling and wall mounting bracket


	mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair	Art. No. 222827
--	--	--------------------

Spare Parts


Cover

	for luminaire size 2	Art. No. 222427
--	----------------------	--------------------

Reflector Plate

	Spare part for 6409 size 2, colour temperature 5000 K	Art. No. 270818
--	---	--------------------

Contact element

	8080/1-3-L 2 NC contact element	Art. No. 132527
--	---------------------------------	--------------------

Lighting

Emergency luminaire With LED


GRP

6409/4128-5101-162-2220-22-850011 Art. No. 272447



Battery set

Art. No.



Battery cover with built-in battery. Gas-tight NiCd battery; 7 Ah / 6 V

223532

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.