

8150/1-0727-0360-150-3311 Art. No. 275140



- Resistant Ex e terminal boxes made of stainless steel, degree of protection IP66, external M8 earth connection
- Version as screw-on cover or hinged cover with cam locks
- Fittings can be configured individually

### MY R. STAHL 8150A



R. STAHL Series 8150 Ex e terminal boxes are made of brush finished stainless steel (1.4301, AISI 304 or 1.4404, AISI 316L) and are particularly resistant. The optimised design, like the circumferential protection channel on the cover opening and the silicone seal suitable for the most extreme temperature ranges, makes the enclosures usable worldwide. Various optional accessories are available.

## Technical Data

### Explosion Protection

Scope of validity	European Union (ATEX) IECEX United Kingdom
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 09.0048
IECEX gas explosion protection	Ex eb IIC T6 / T5 Gb
IECEX dust certificate	IECEX PTB 09.0048
IECEX dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db
ATEX gas certificate	PTB 09 ATEX 1108
ATEX gas explosion protection	⊕ II 2 G Ex eb IIC T6 / T5 Gb
ATEX dust certificate	PTB 09 ATEX 1108
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C / T95 °C Db
Certificates	ATEX (PTB), IECEX (PTB), Korea (KGS), Taiwan (ITRI), USA (UL)
Declaration of Conformity	ATEX (EUK), China (CCC)

### Electrical Data

Rated operational voltage AC	0 ... 690 V
------------------------------	-------------

### Ambient Conditions

Ambient temperature	-60 °C ... +40 °C (T6) -60 °C ... +55 °C (T5)
Ambient temperature	-76°F ... +104°F (T6) -76°F ... +131°F (T5)

### Mechanical Data

Degree of protection IP (IEC 60529)	IP66
Enclosure material	Stainless steel 1.4404, (AISI 316L), brush finished

8150/1-0727-0360-150-3311 Art. No. 275140

#### Mechanical Data

Flammability according to	IEC/EN 60695 UL 94 ASTM D635
External protective conductor connection	M8
Silicone-free	No
Connection cross-section	2.5 mm <sup>2</sup>
Connection cross-section AWG	AWG14
Cover thickness	2 mm
Cover thickness inch	0.079 in
Wall thickness	1.5 mm
Wall thickness, inches	0.059 in
Dimensions (WxHxD)	727 x 360 x 150 mm
Width	727 mm
Width, inches	28.622 in
Height	360 mm
Height, inches	14.173 in
Depth	150 mm
Depth, inches	5.906 in
Weight	12 kg
Weight	26.46 lb


#### Mounting / Installation

Tightening torque of cover screw 1	4.5 Nm
Tightening torque of cover screw 1 lbf in	39.83 lbf in

#### Components


Flange and plates	Without flange
Entries installation options/side	Without drilled holes
Terminal rail	35 x 672 mm (1x)
Terminal rail	1,38 x 26,46 " (1x)
Type of terminals 1	1 x Phoenix UT 2-conductor, 2.5 mm <sup>2</sup> , grey

#### Technical Drawings – Subject to Alterations



8150/1-0727-0360-150-3311 Art. No. 275140


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

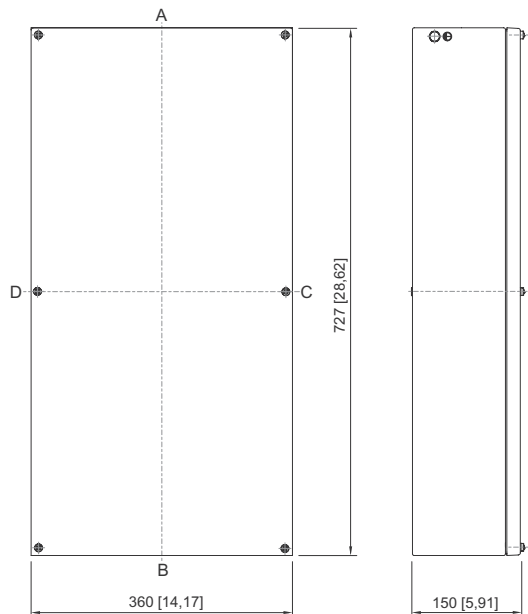

8150/1-0727-0360-150-..1.

## Accessories

### Screw hinge assembly kit

		Art. No.
	Retrofittable hinge for enclosure up to max. 400 x 400 mm	275739

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.